



G		\$ /	$V_{GS(th)}$ $V_{DS}=10V$ $I_D=1mA$ $V_{DS}=V_{GS}$ $I_D=250\mu A$	% & '	( ) *
			+ , - . / 0 1 2 3 4 5 0 1 6 7	8 9	( ) *




Rev.I May.-2022

SOT-23: ; ; < N = > MOS ? @ A B C N-CHANNEL MOSFET in a SOT-23 Plastic Package.

DEIF! GHI JKLMN I OPJKCQJ RST C O 1 6 7 C  
Sensitive gate trigger current and Low Holding current.ESD protected up to 1KV. HF product.

UVWX I Y Z L [ \ F ! C  
Intended for use in general purpose switching and phase control applications.




PIN1] G      PIN 2] S      PIN 3] D

Marking	H702
---------	------

Rev.I May.-2022





Rev.I May.-2022

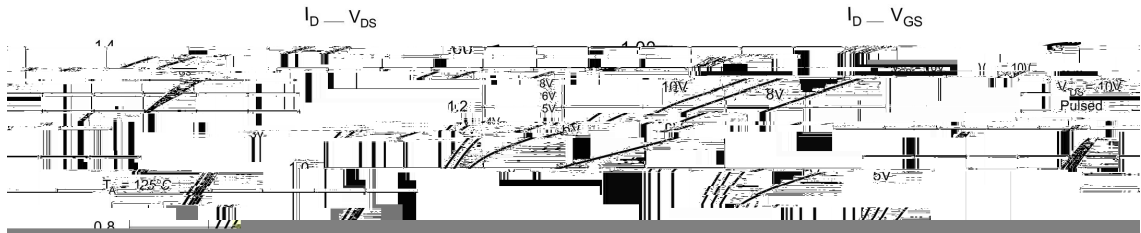



Rev.I May.-2022

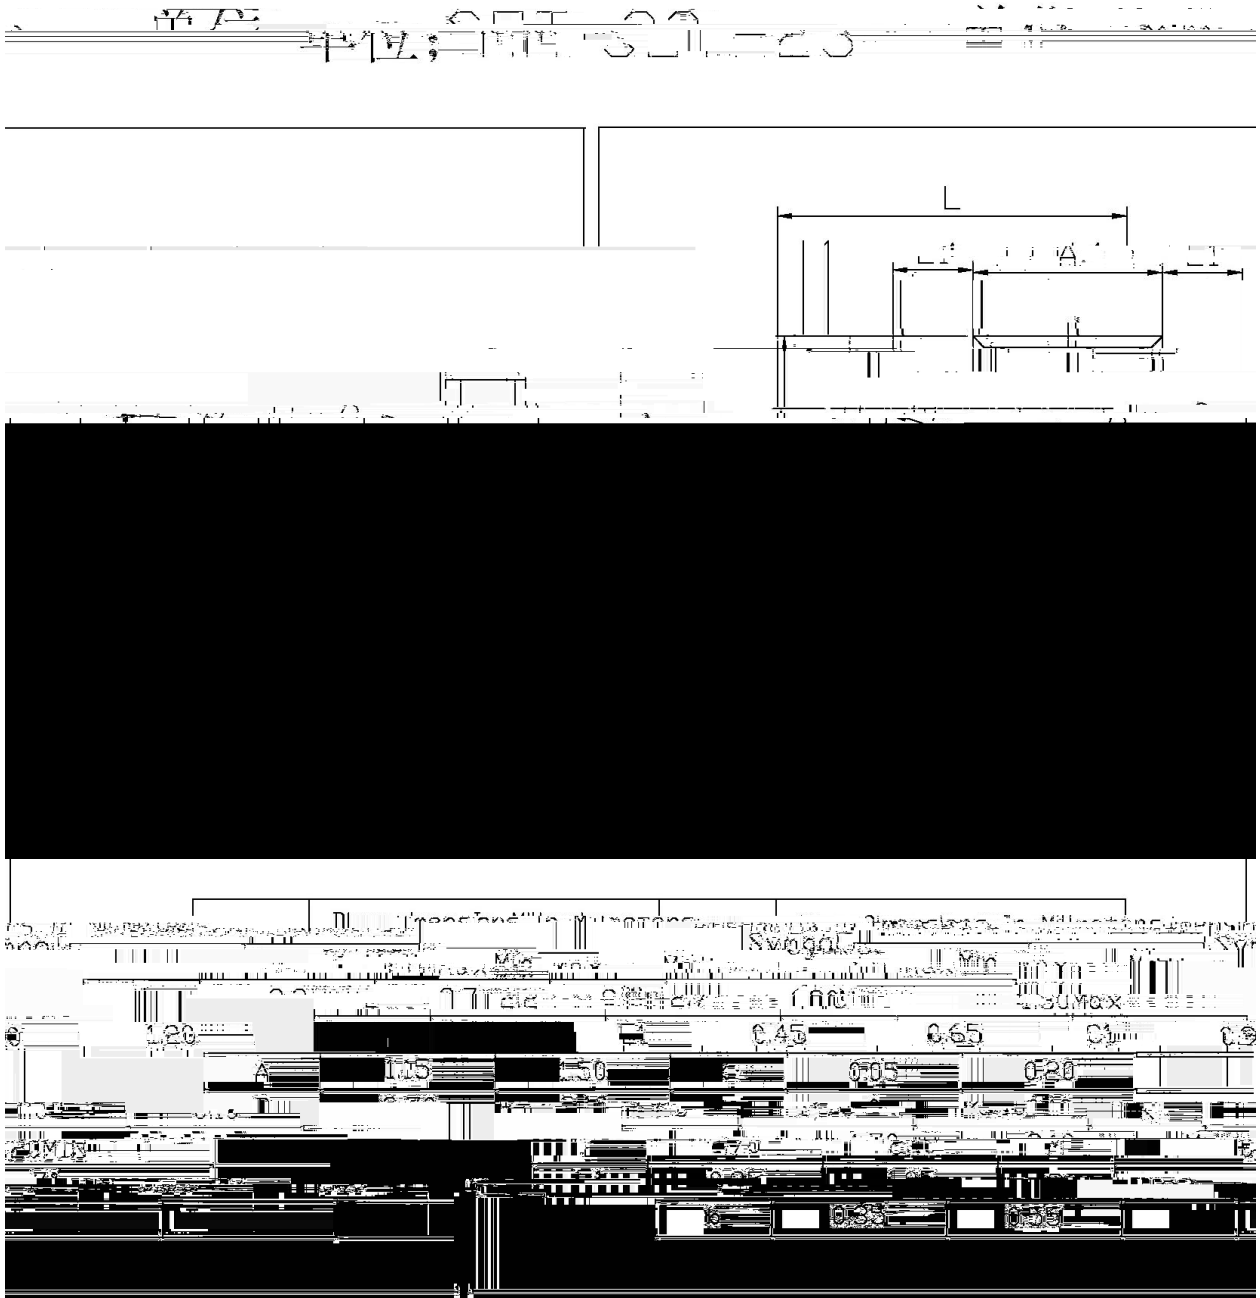

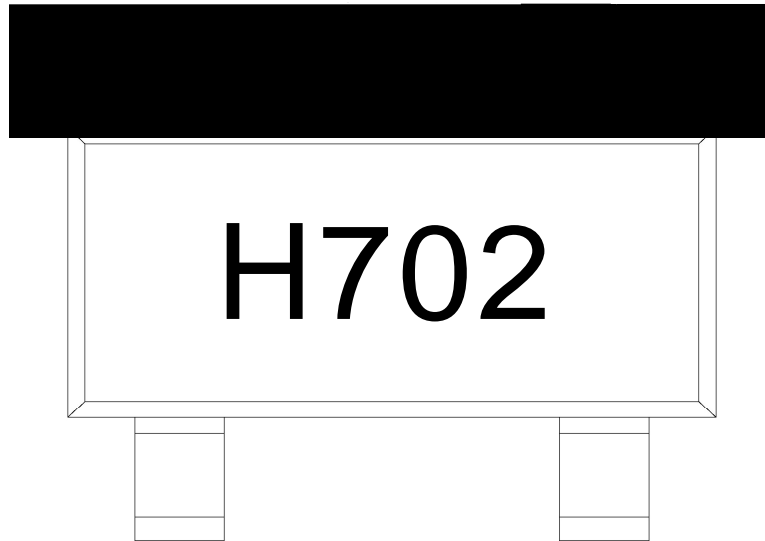

mn ]

H] o p q r fi

702] o k a r fi

Note:

H: Company Code

702: Product Type



Rev.I May.-2022




- |   |         |            |   |
|---|---------|------------|---|
| 1 | 150 180 | 60 90sec;  | <b>Note:</b><br>1.Preheating:150~180 , Time:60~90sec.<br>2.Peak Temp.:245±5 , Duration:5± 0.5sec.<br>3. Cooling Speed: 2~10 /sec. |
| 2 | 245±5   | 5± 0.5sec; |   |
| 3 | 2 10    | /sec.      |   |



260±5                      10±1 sec.                      Temp.:260±5℃                      Time:10±1 sec



/ REEL

Package Type 封装形式	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units 包装数量 Unit/Inner Box 只/盒	Dimension 包装尺寸 (unit: mm <sup>3</sup> )
----------------------	--------------------	-------------------------	-------------------------------------	---