

/ Descriptions

TO-220 PNP Silicon PNP transistor in a TO-220 Plastic Package.



/ Features

, 2SC2654

Large current capacity with small package, low collector saturation voltage, pair with 2SC2654.

/ Applications

For low-frequency power amplifiers and mid-speed switching.

/ Equivalent Circuit**/ Pinning**



PIN1 Base PIN 2 Collector PIN 3 Emitter

/ h_{FE} Classifications & Marking


h_{FE} Classifications
Symbol

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-100	V
Collector to Emitter Voltage	V_{CEO}	-40	V
Emitter to Base Voltage	V_{EBO}	-7.0	V
Collector Current - Continuous	I_C	-7.0	A
Collector Current – Continuous(Pulse)	I_{CP}	-15	A
Base Current - Continuous	I_B	-3.5	A
Collector Power Dissipation	$P_C(T_C=25^\circ\text{C})$	40	W
	P_C	1.5	W


/ Electrical Characteristic Curve

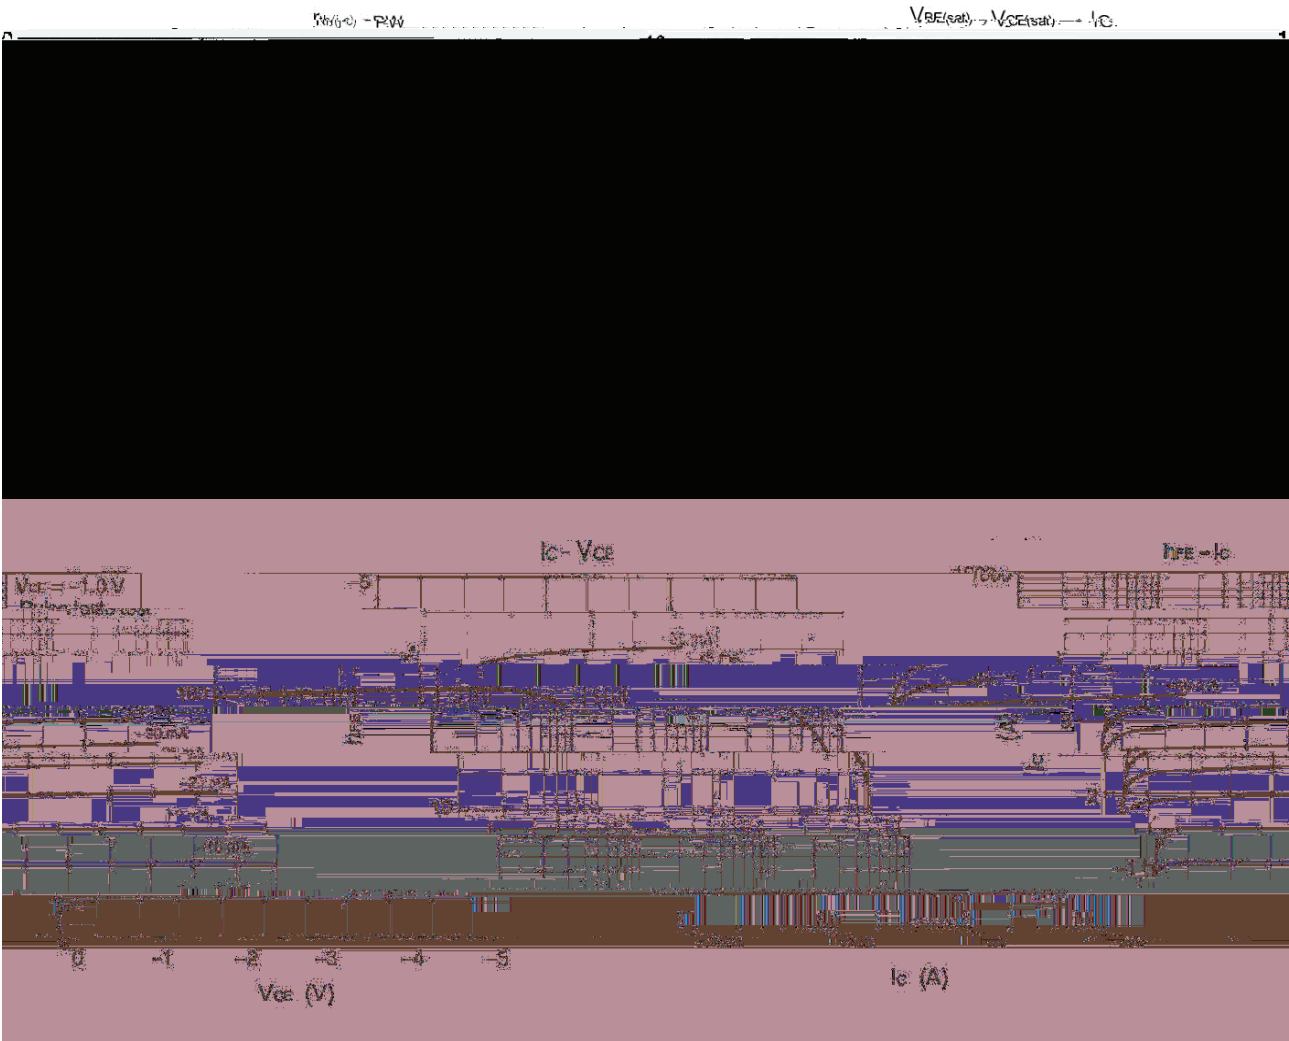

/ Package Dimensions

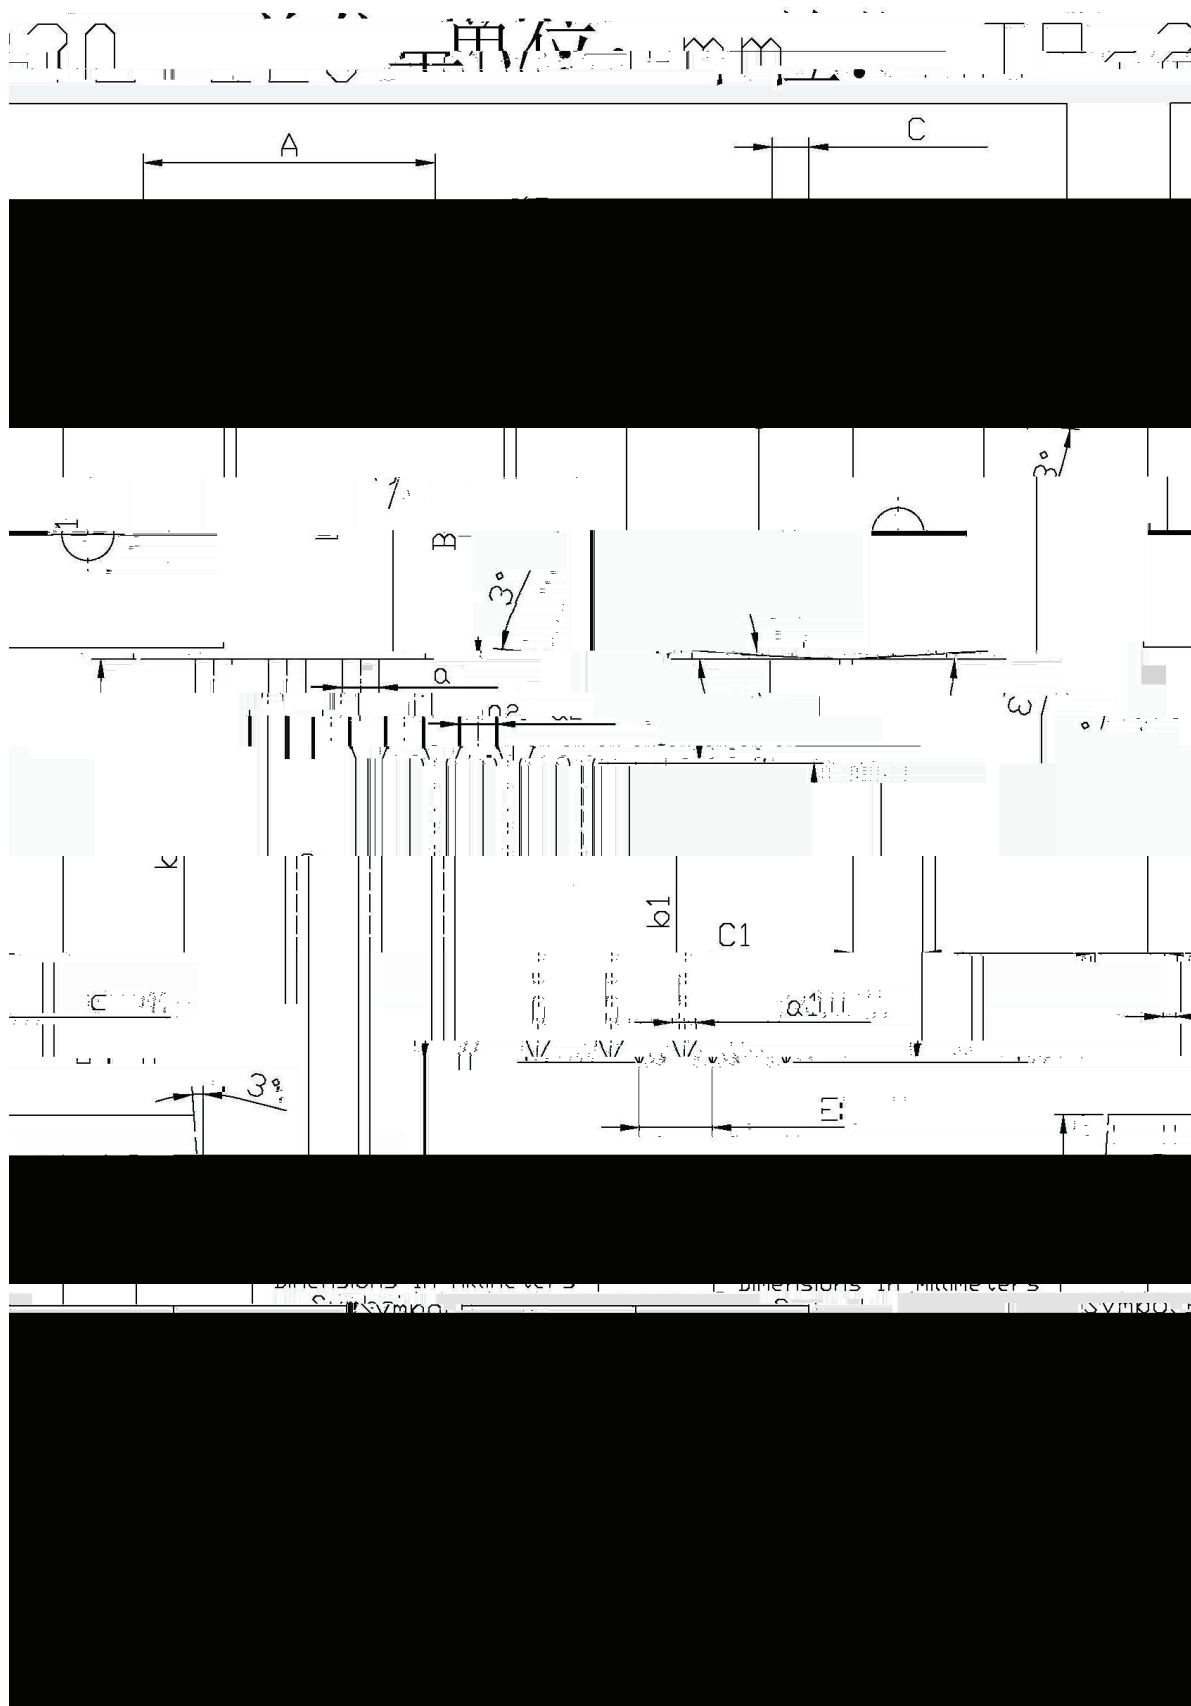

() / Temperature Profile for Dip Soldering(Pb-Free)

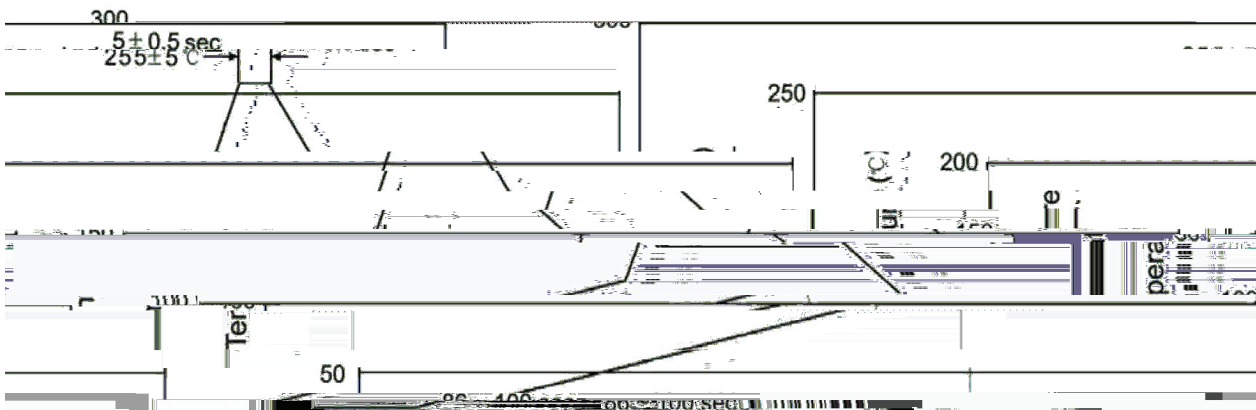

- 1

25 150

60 90sec;

2

255±5

5±0.5sec;

3

2 10

/sec.
- Note:

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

10 5 4 -