


Silicon PNP transistor in a TO-92LM Plastic Package.

High DC current gain and excellent h_{FE} linearity, low saturation voltage.


Strobe flash, medium power amplifier applications.



PIN1 Base PIN 2 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	A	B	C
h_{FE} Range	140~280	200~400	300~600


Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

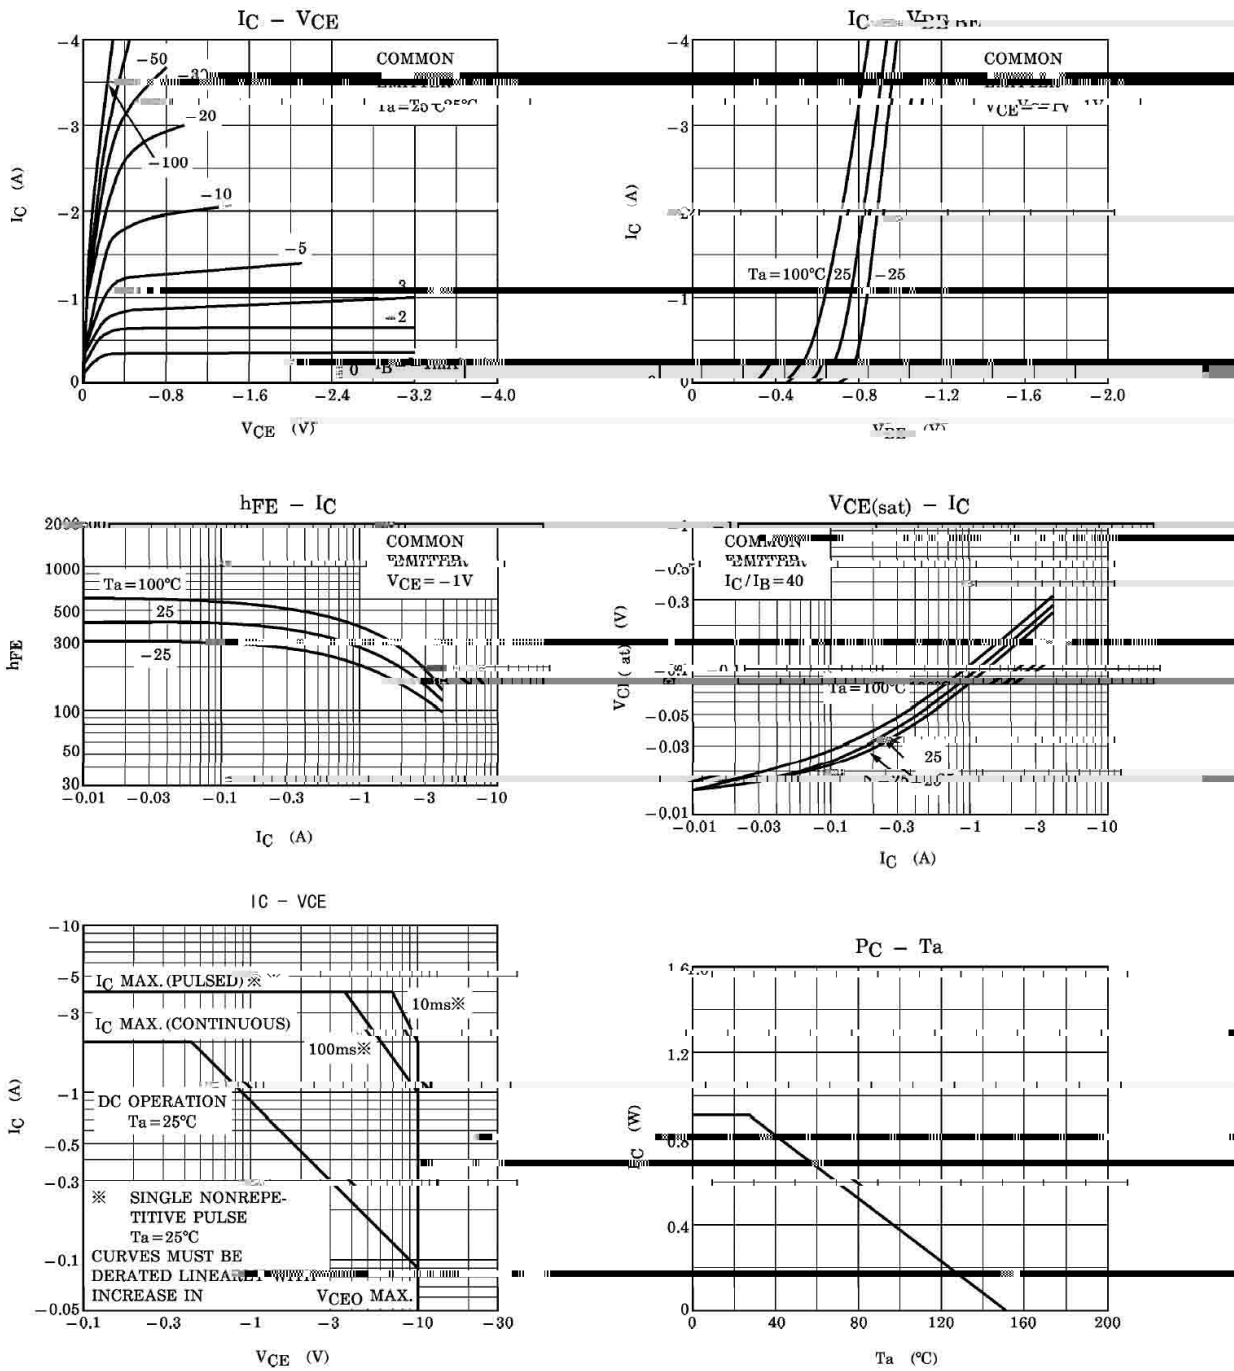

TO-92LM

Unit: mm

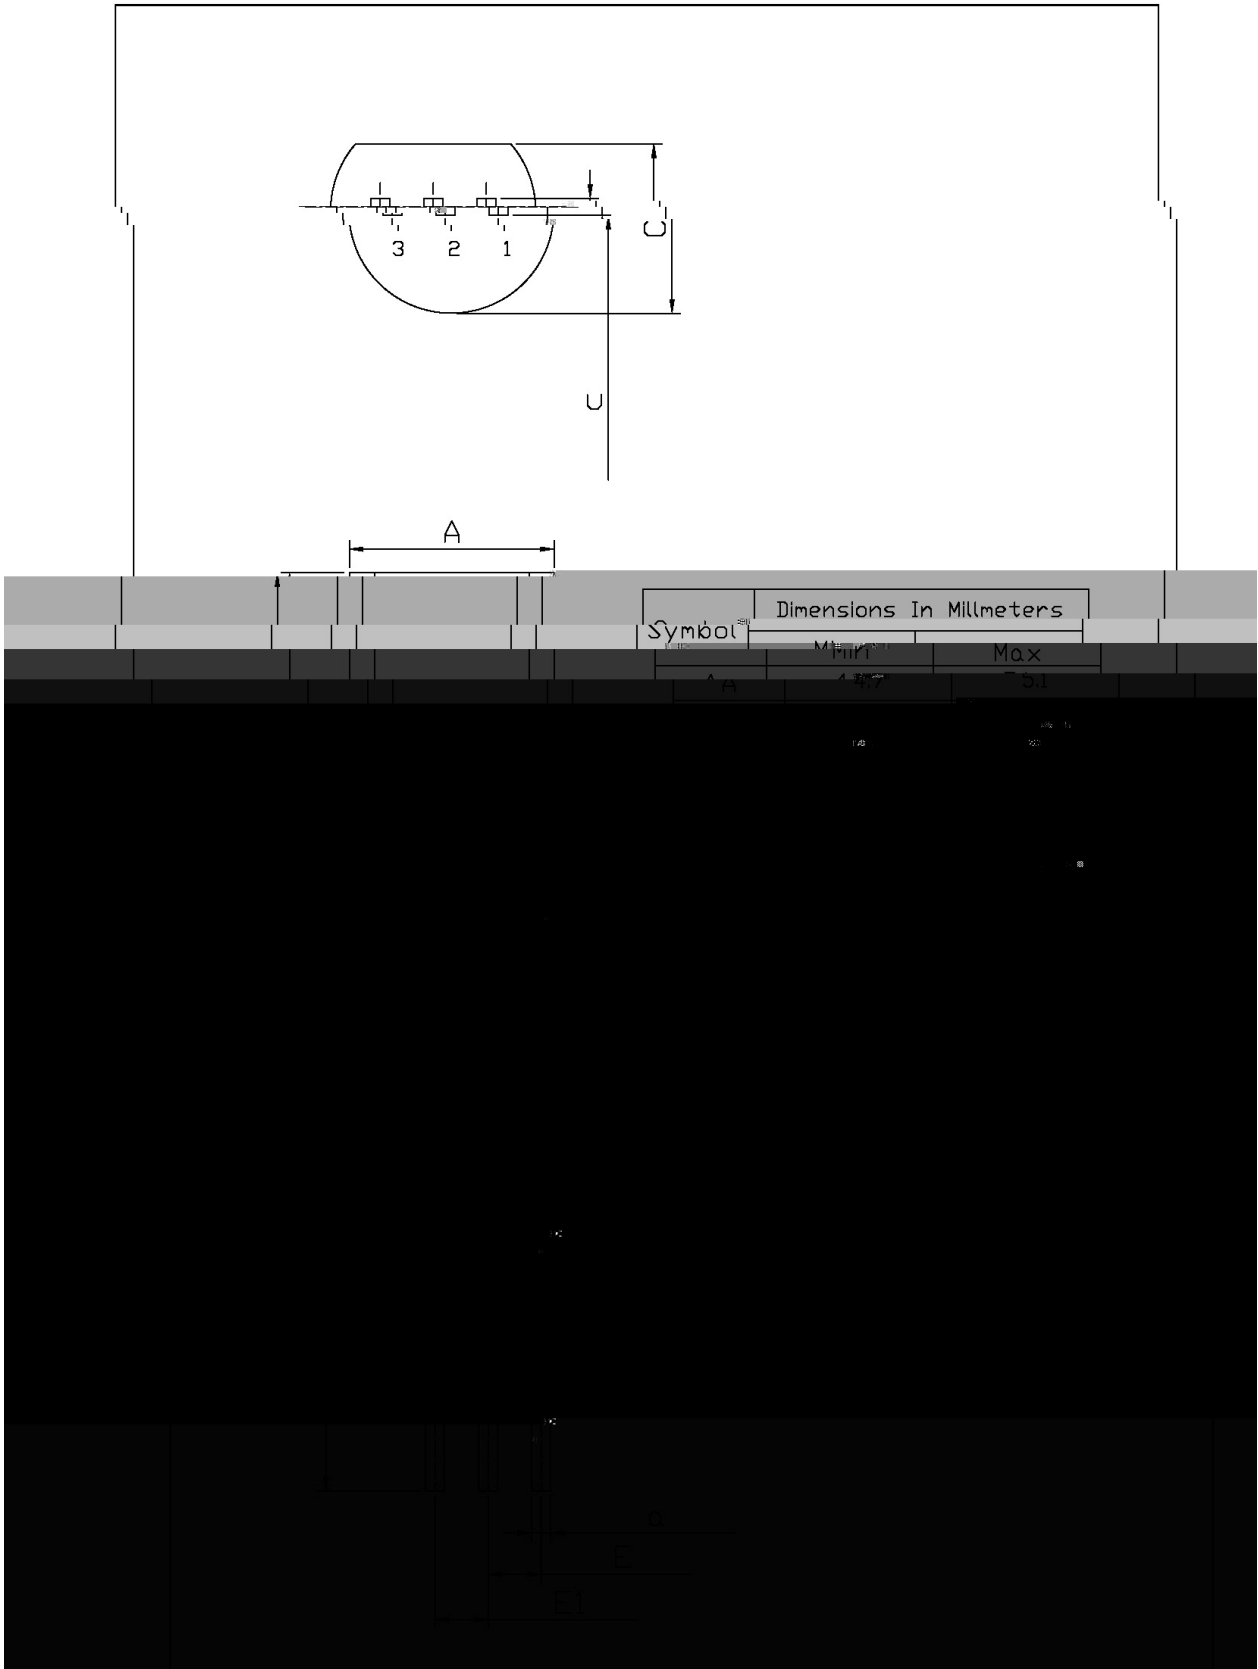




Note:

BR: Company Code.

A1160: Product Type.

C: h_{FE} Classifications Symbol

****: Lot No. Code,code change with Lot No.

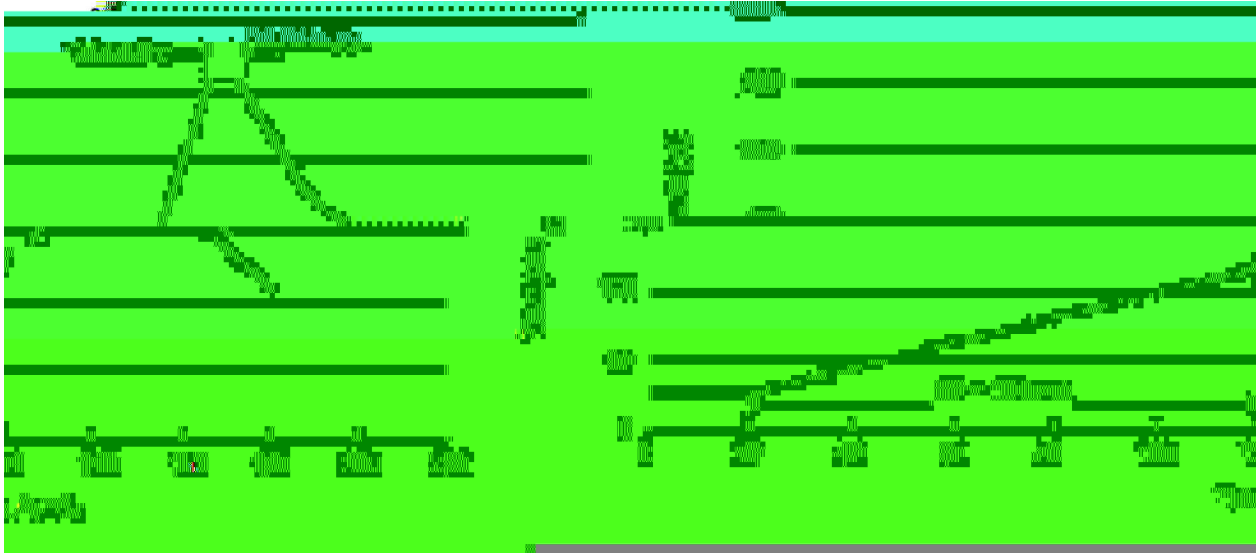

1 25 150 60 90sec;
2 255 5 5 0.5sec;
3 2 10 /sec.

Note:

1.Preheating:25~150 , Time:60~90sec.
2.Peak Temp.:255 5 , Duration:5 0.5sec.
3. Cooling Speed: 2~10 /sec.

*

5 5