


KF \$O) GE G Silicon PNP transistor in a TO-92 Plastic Package.

)J: **)O


Low rbb, low noise figure, complementary pair with 2SC3329

Low noise audio amplifier applications.



PIN 1 Base PIN 2 Collector PIN 3 Emitter

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-80	V
Collector to Emitter Voltage	V_{CEO}	-80	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-100	mA
Base Current - Continuous	I_B	-20	mA
Collector Power Dissipation	P_C	400	mW

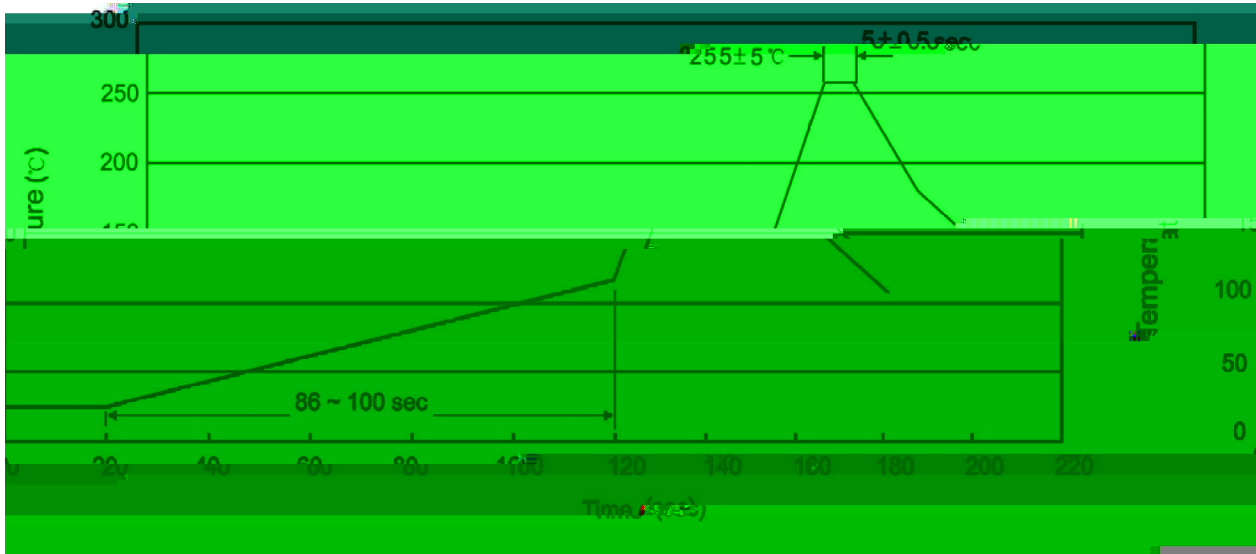

- | | | | | |
|---|--------|-----|------------|----------|
| 1 | 25 | 150 | 60 | 90sec; |
| 2 | 255..5 | | 5..0.5sec; | |
| 3 | | | 2 | 10 /sec. |

Note:

1. Preheating: 25~150 , Time: 60~90sec.
2. Peak Temp.: 255..5 , Duration: 5..0.5sec.
3. Cooling Speed: 2~10 /sec.

270..5

10..1 sec.

Temp: 270±5

Time: 10±1 sec

/ BULK