




Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-180	V
Collector to Emitter Voltage	V_{CEO}	-160	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current - Continuous	I_C	-1.5	A
Collector Power Dissipation	P_C	1.5	W
Collector Power Dissipation	$P_C(T_C=25)$	25	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max
-----------	--------	-----------------	-----	-----	-----

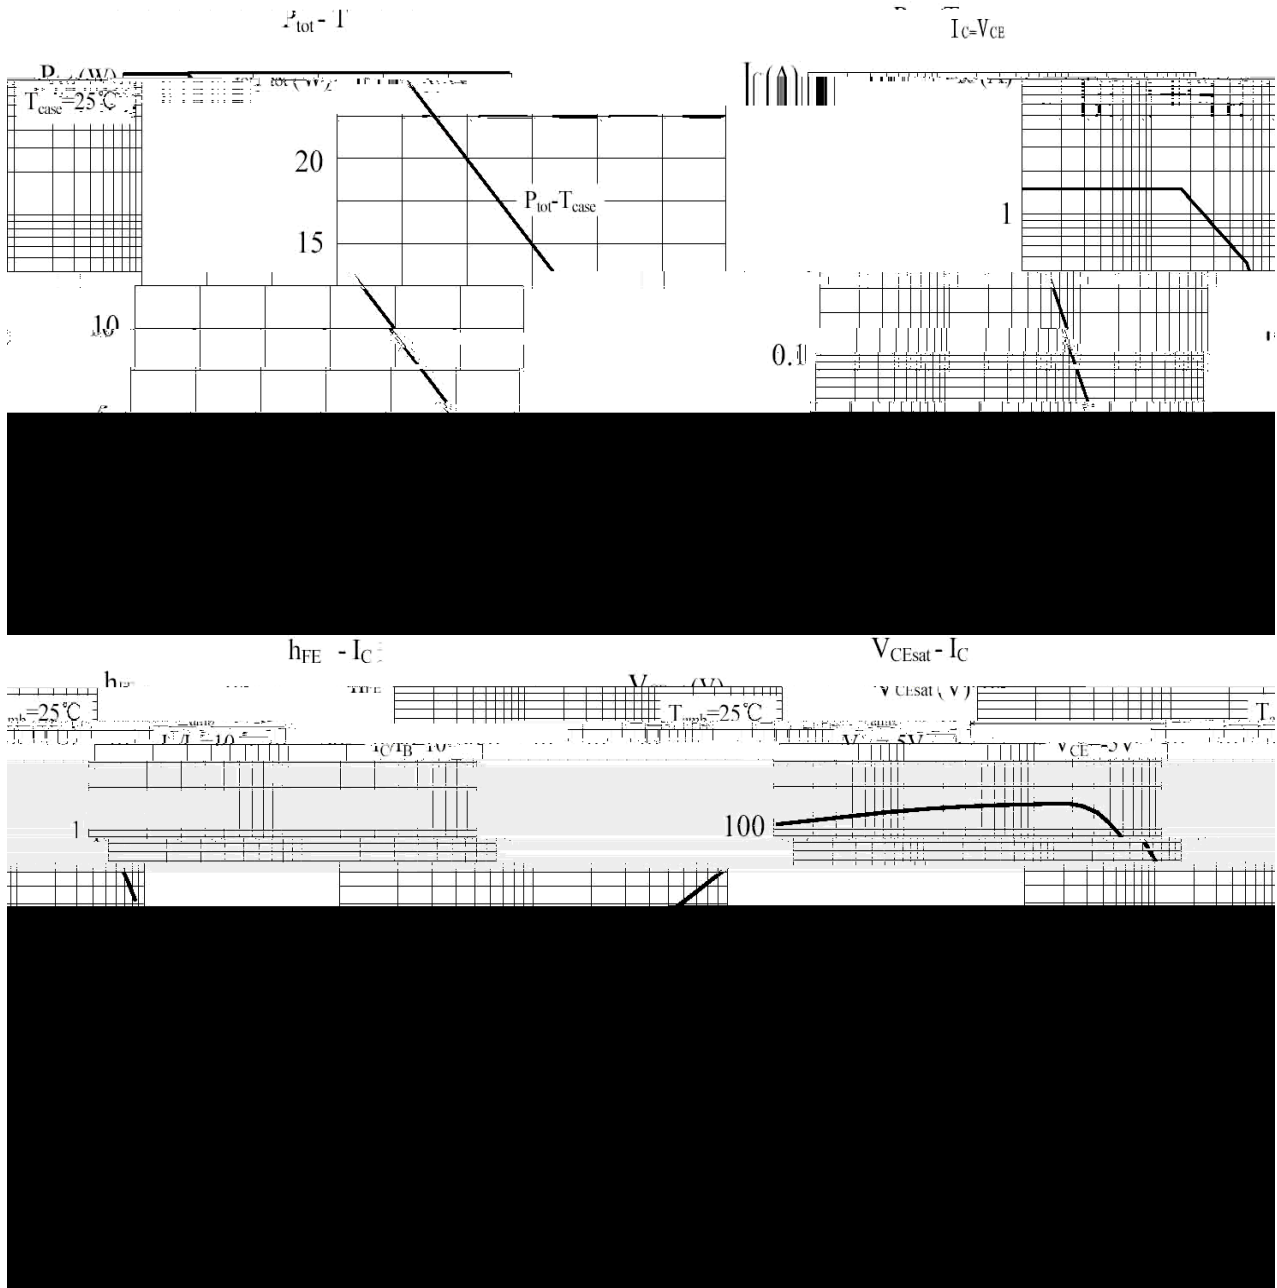

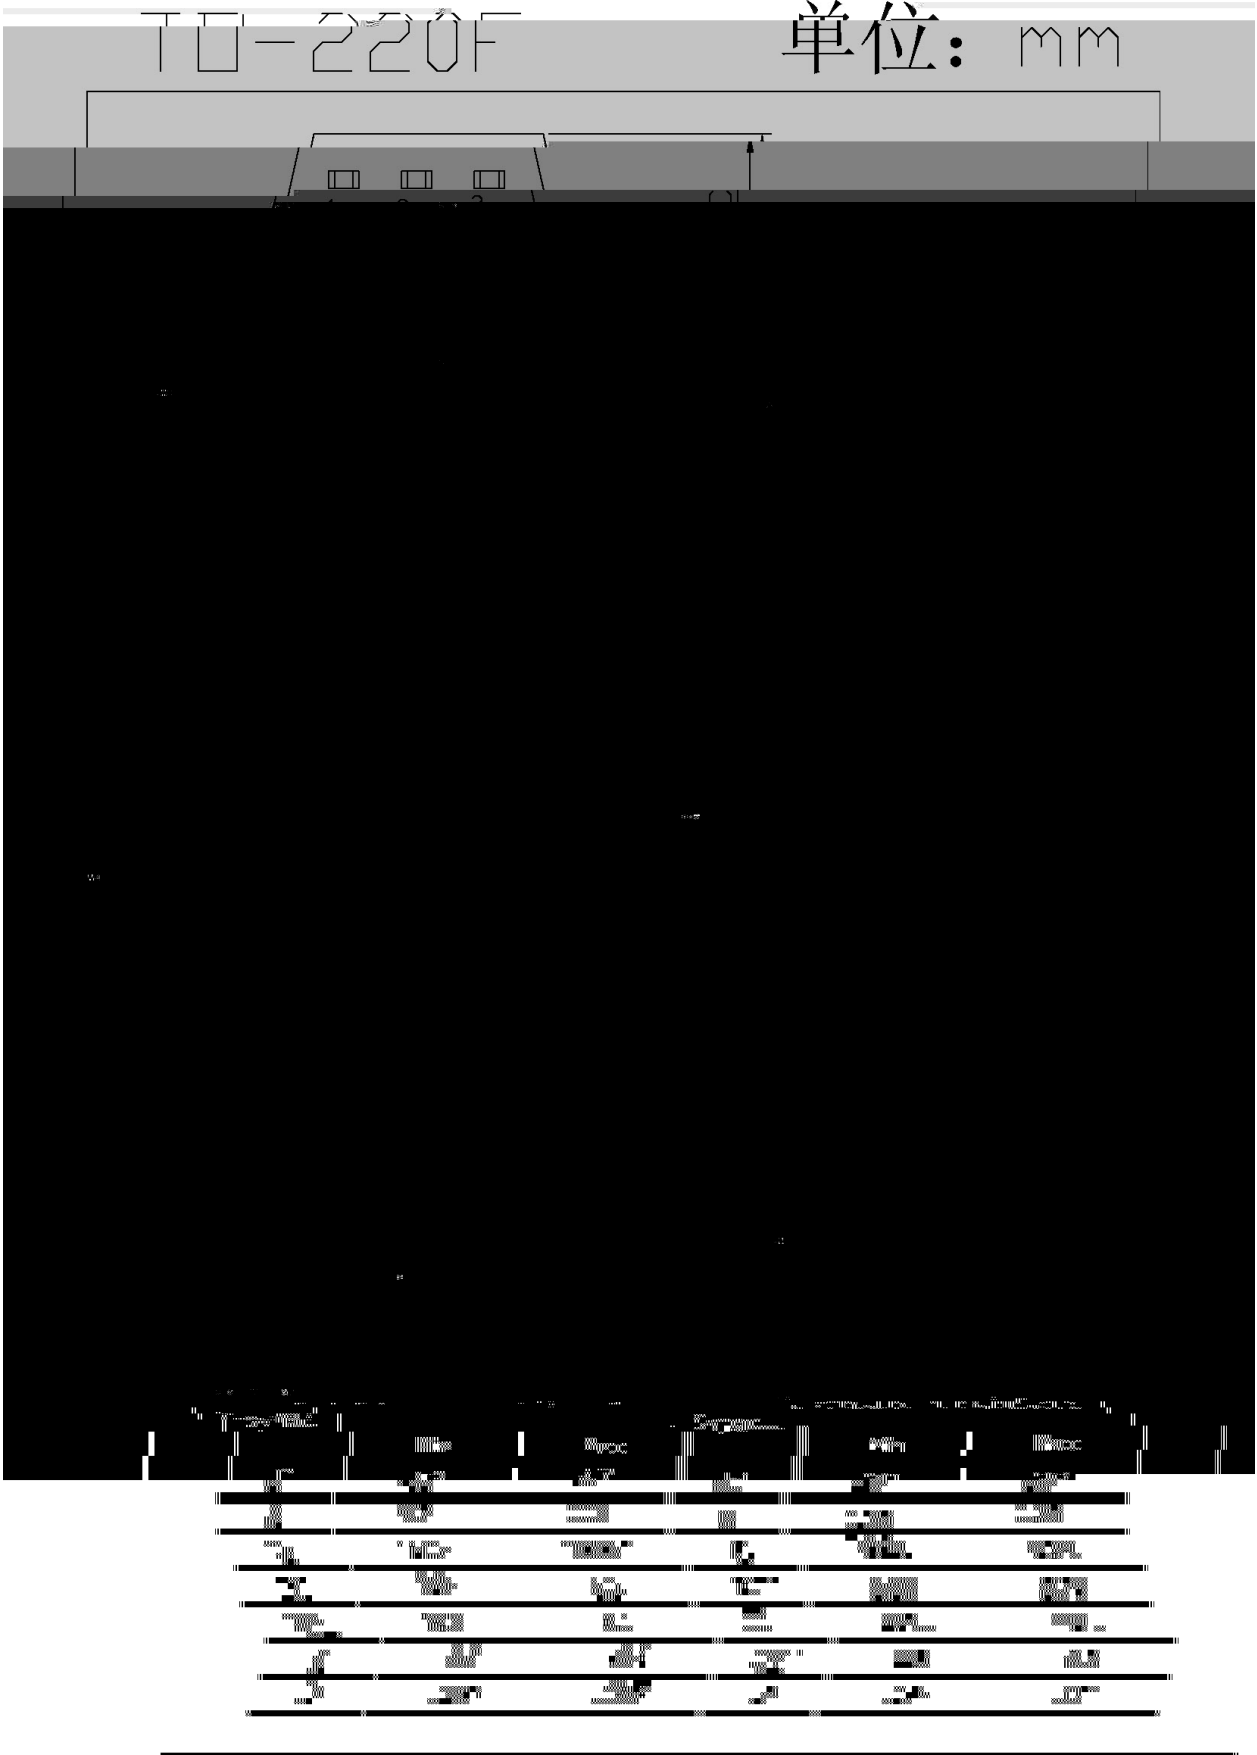

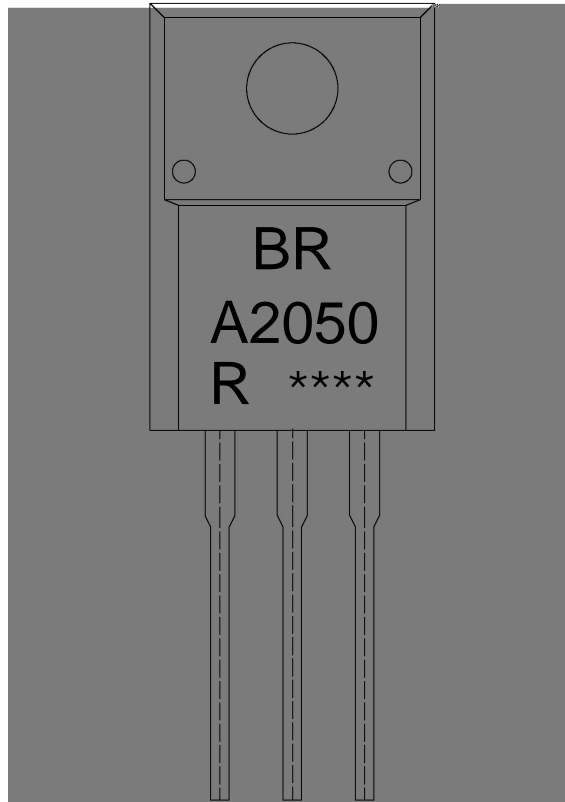

BR

A2050

R: h_{FE}

Note:

BR: Company Code.

A2050: Product Type.

R: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.



1	25	150	60	90sec;	Note: 1.Preheating:25~150 , Time:60~90sec. 2.Peak Temp.:255±5 , Duration:5± 0.5sec. 3. Cooling Speed: 2~10 /sec.
2	255±5		5± 0.5sec;		
3		2	10 /sec.		

270±5 10± 1 sec. Temp.:270±5 Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱