


TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.


Excellent h_{FE} Linearity.

Low frequency amplifier applications.




PIN1 Base PIN 2 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	C	D	E
h_{FE} Range	160~320	250~500	400~800

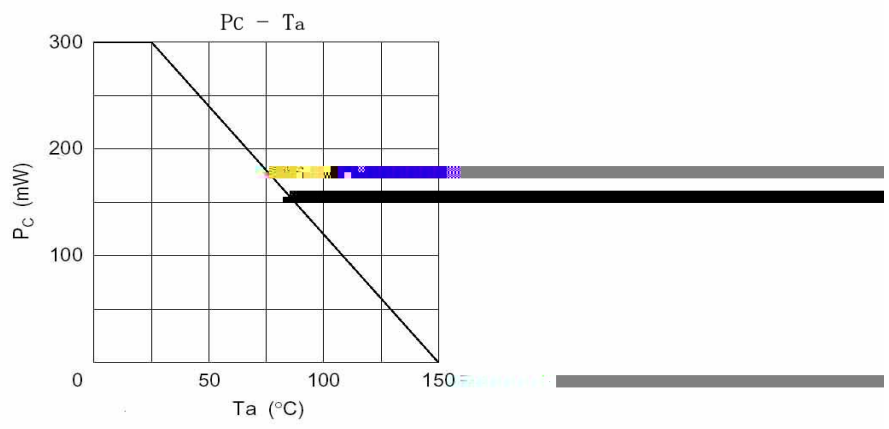

T0-92

Unit: mm

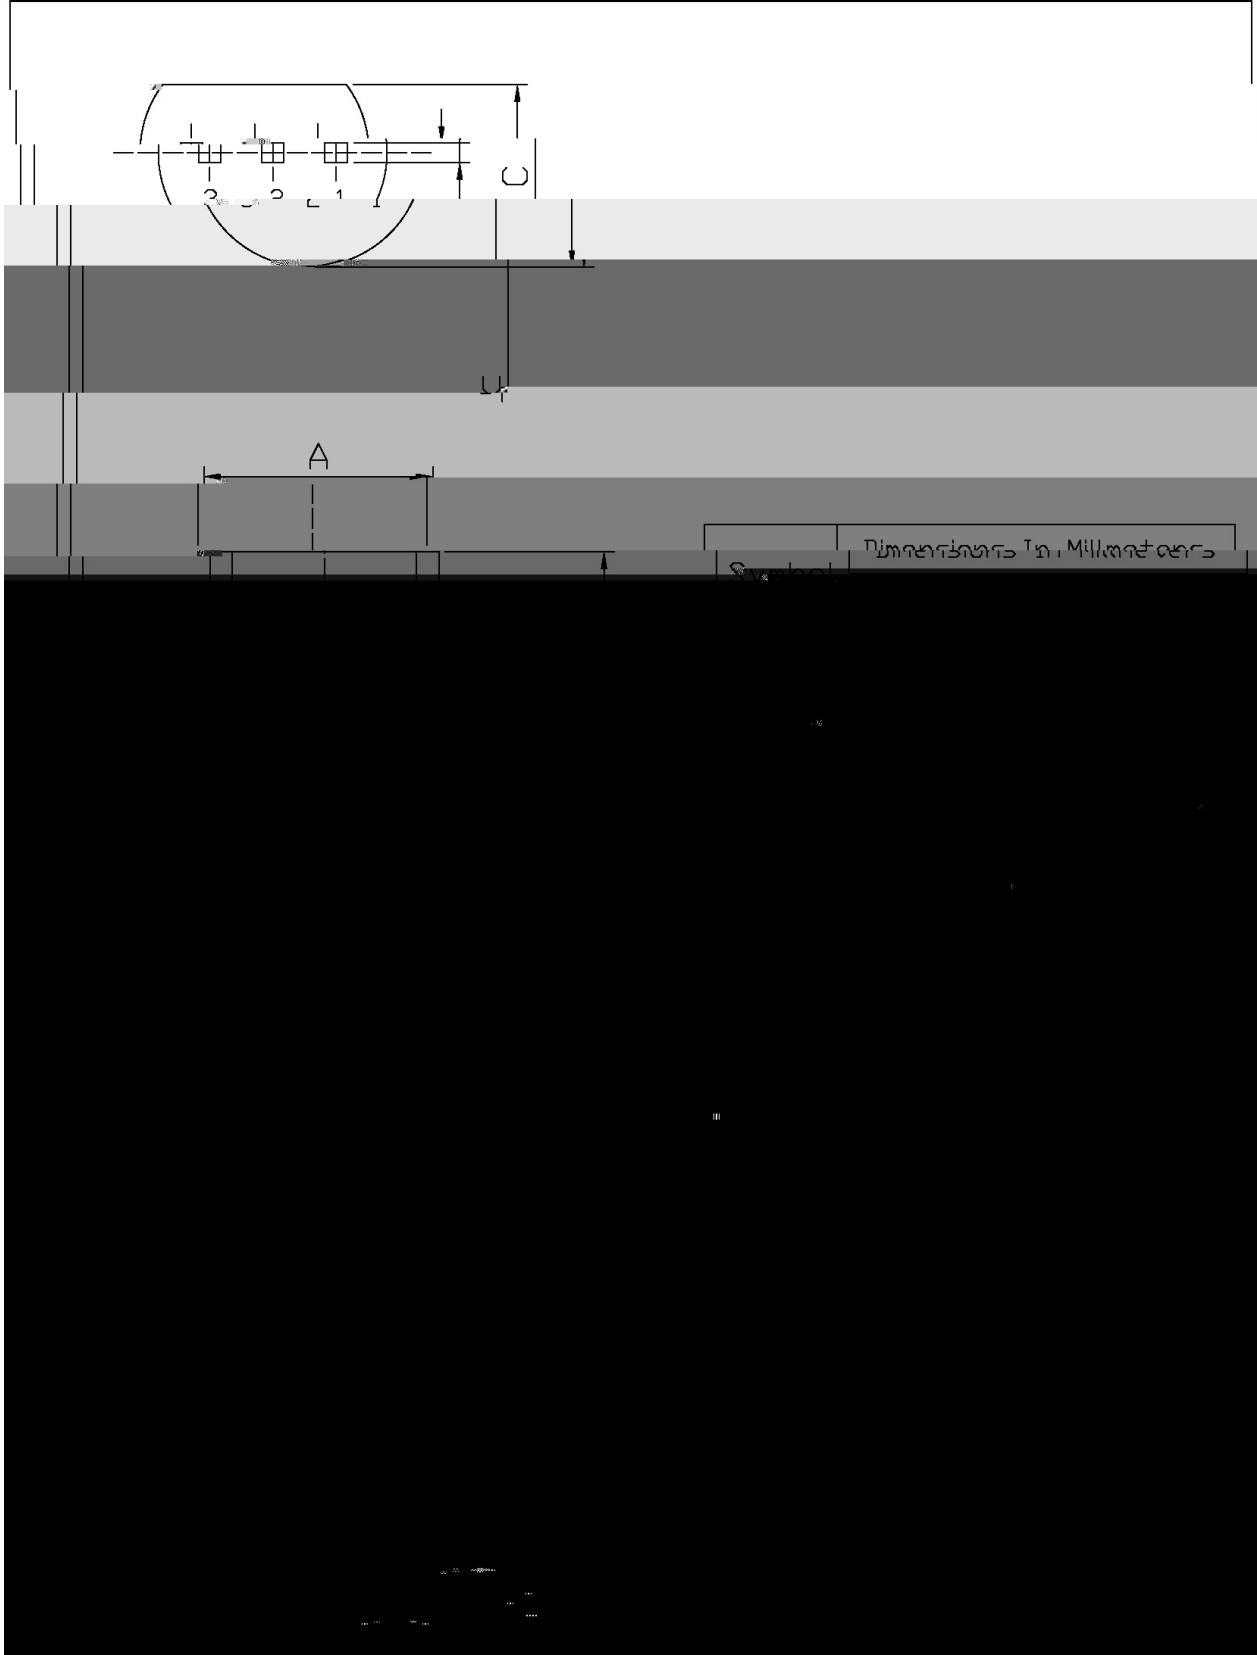

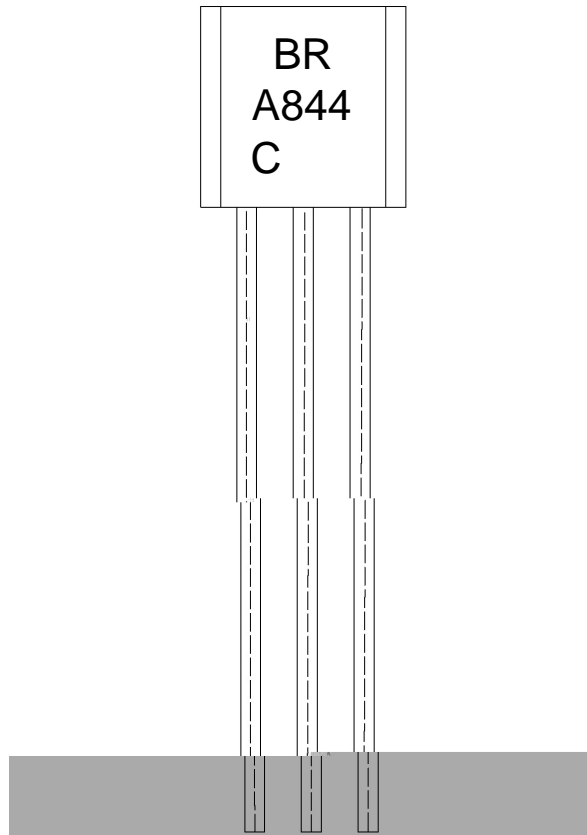

BR:

A844

C:

h_{FE}


Note:

BR: Company Code.

A844: Product Type.

C: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

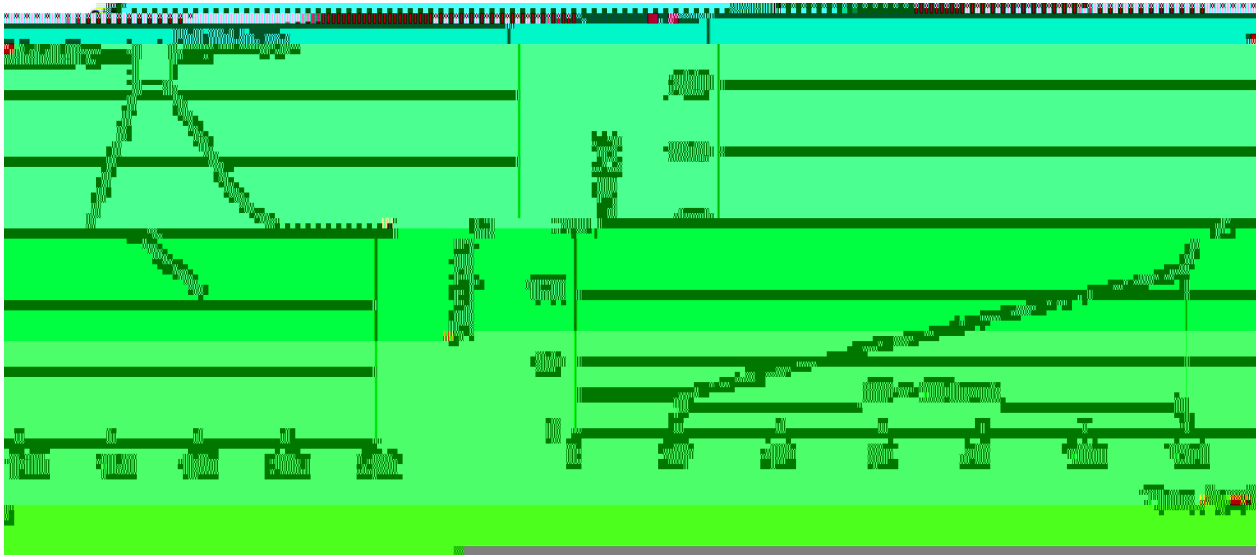

- | | | | | | | |
|---|-------|-----|-----------|--------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | Note: | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. | |

270±5

10±1 sec.

Temp:270±5

Time:10±1 sec

/ BULK

Package Type	Units				Dimension		(unit mm ³)

*