


TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.

2SC1740

Excellent h_{FE} linearity, complementary pair with 2SC1740.


General purpose applications.



PIN1 Base PIN 2 a3TJ/TT7 1 Tf79.0971 0TD0 Tc0 Tw079Fj/TT4 1 Tf1 0 TD-0.0002 Tc1[E]-37(sm)-374(it

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-6.0	V


/ Electrical Characteristic Curve

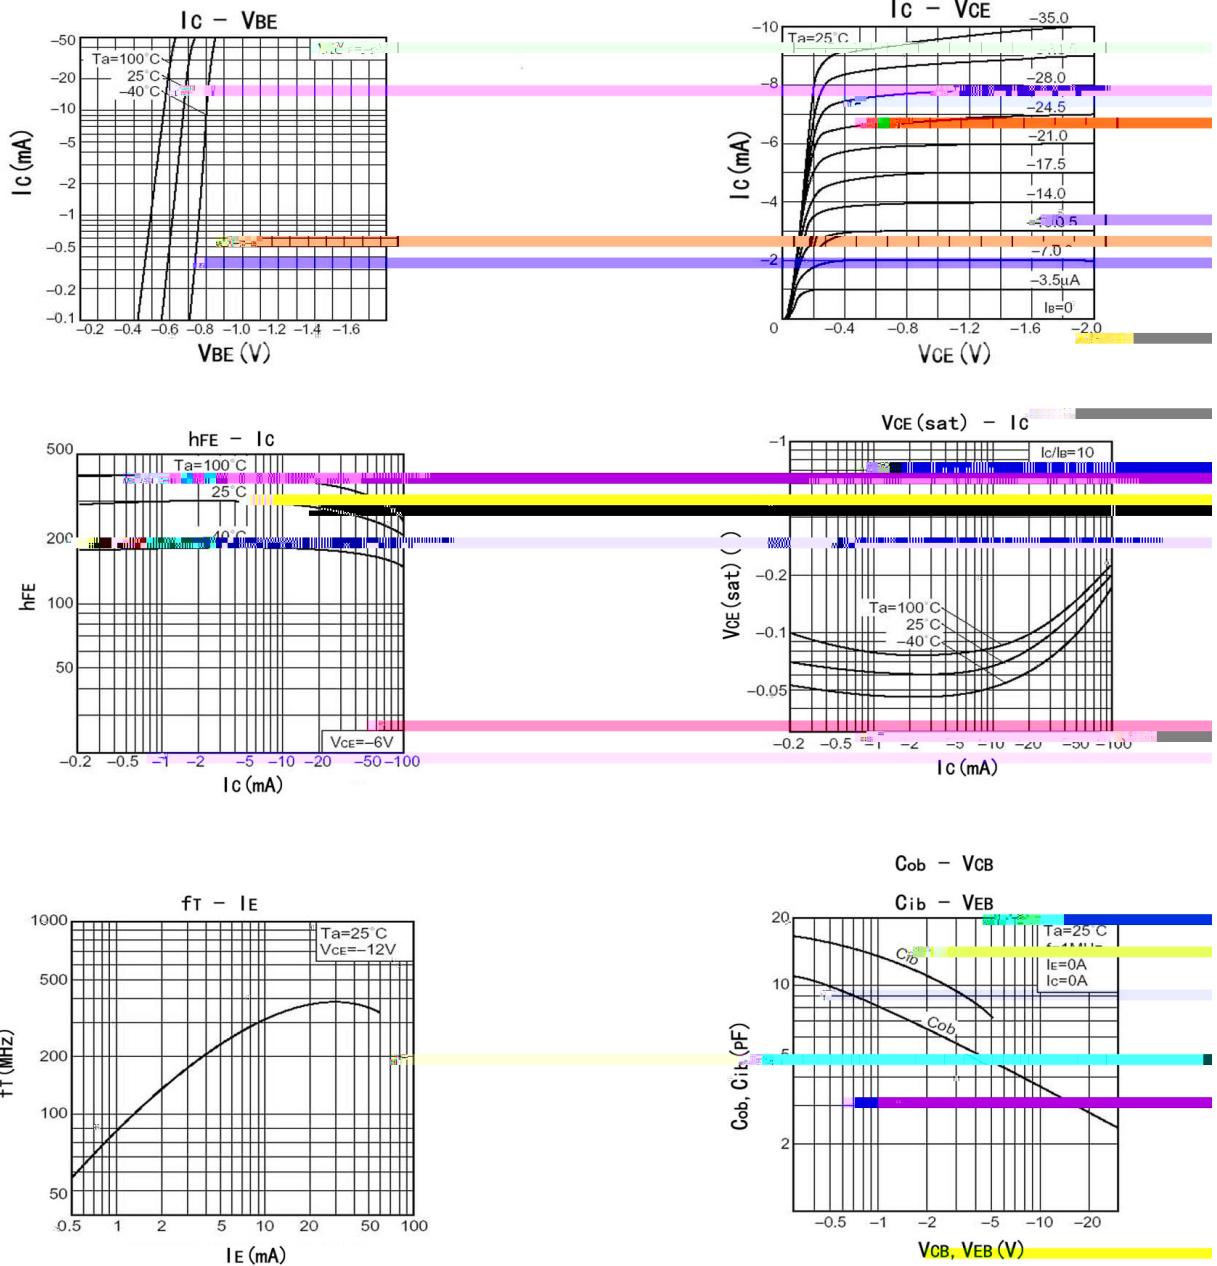


/ Package Dimensions

TO-92

Unit: mm

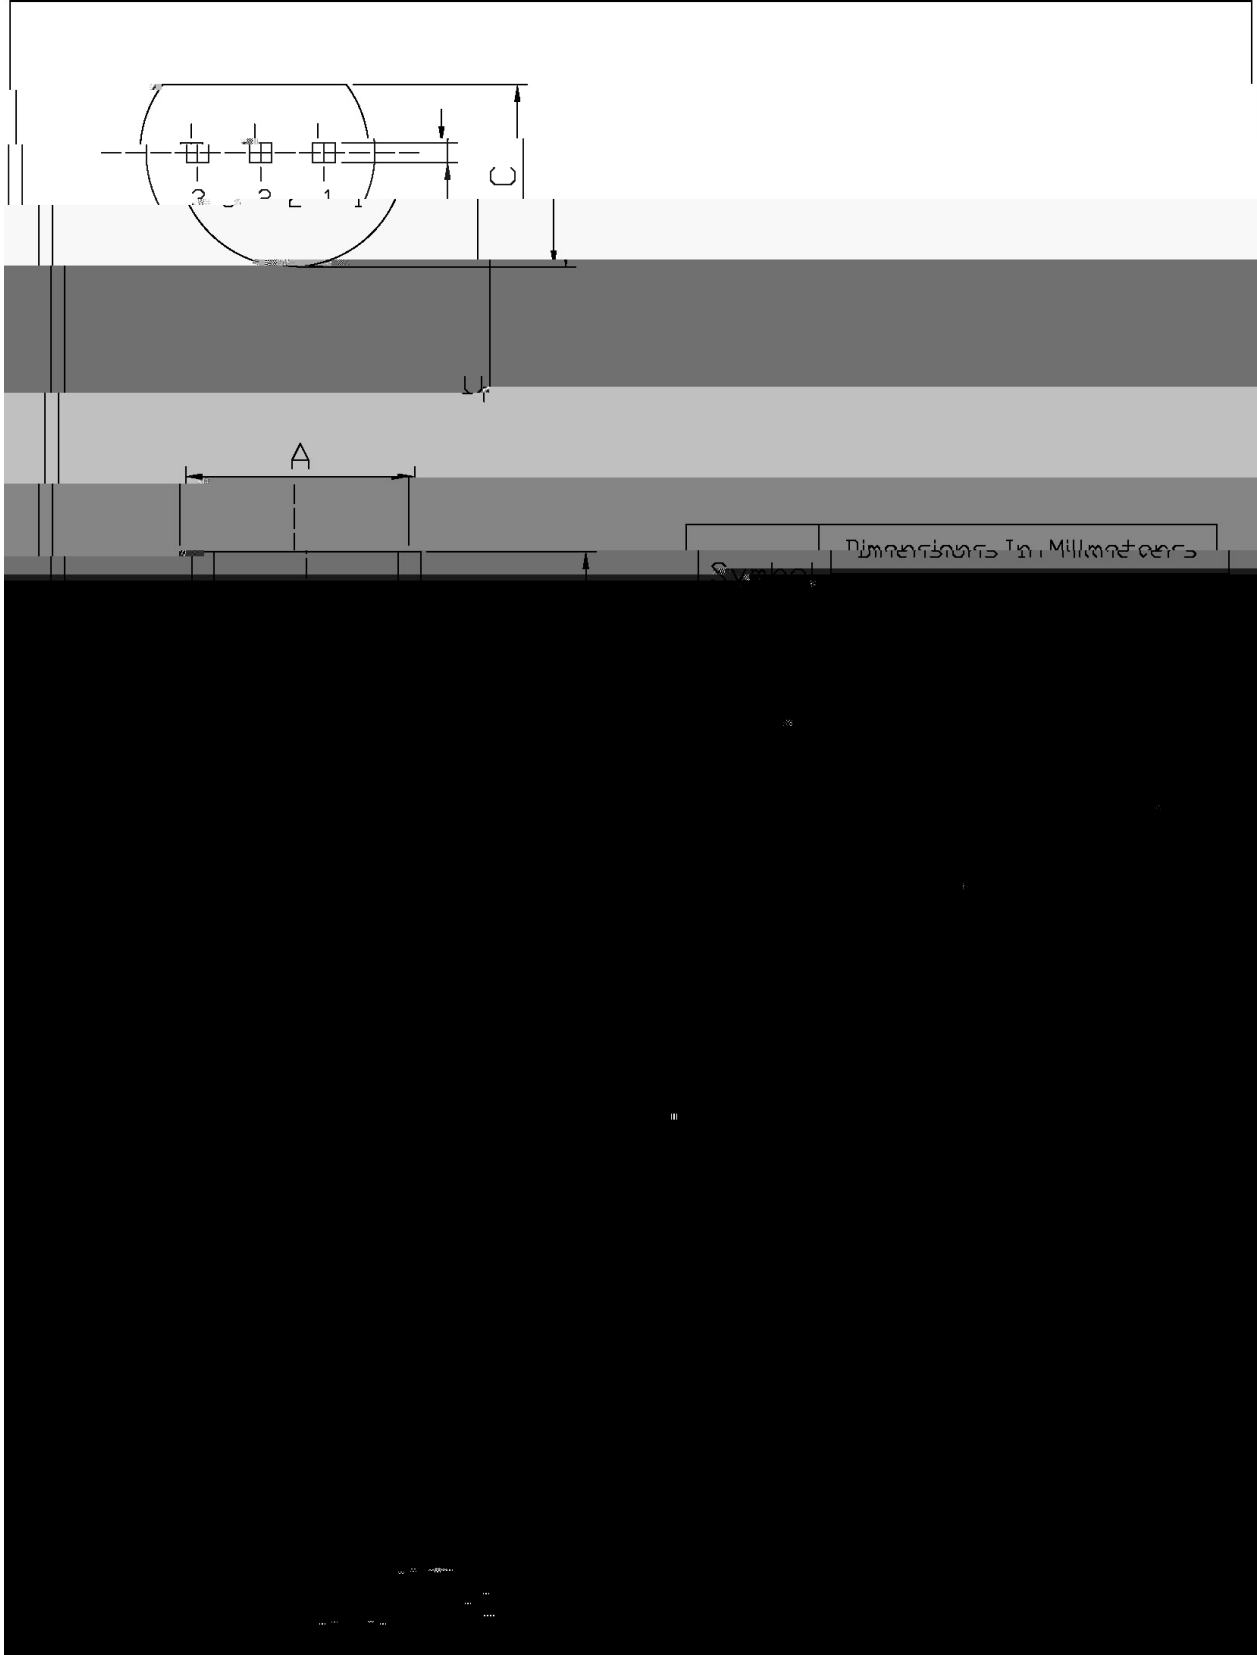

/ Marking Instructions

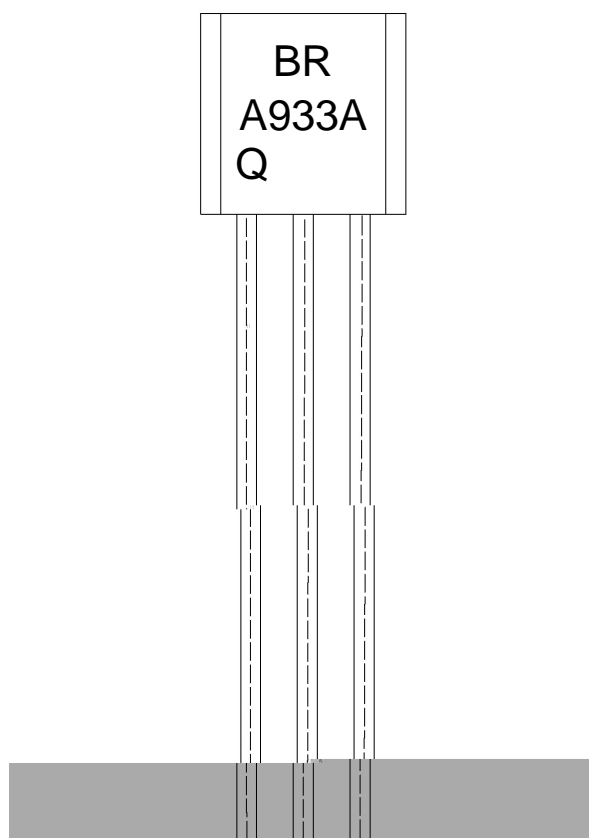

BR:

A 933A

Q:

h_{FE}

Note:


BR: Company Code.

A933A: Product Type.

Q: h_{FE} Classifications Symbol.

****: Lot No. Code,code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

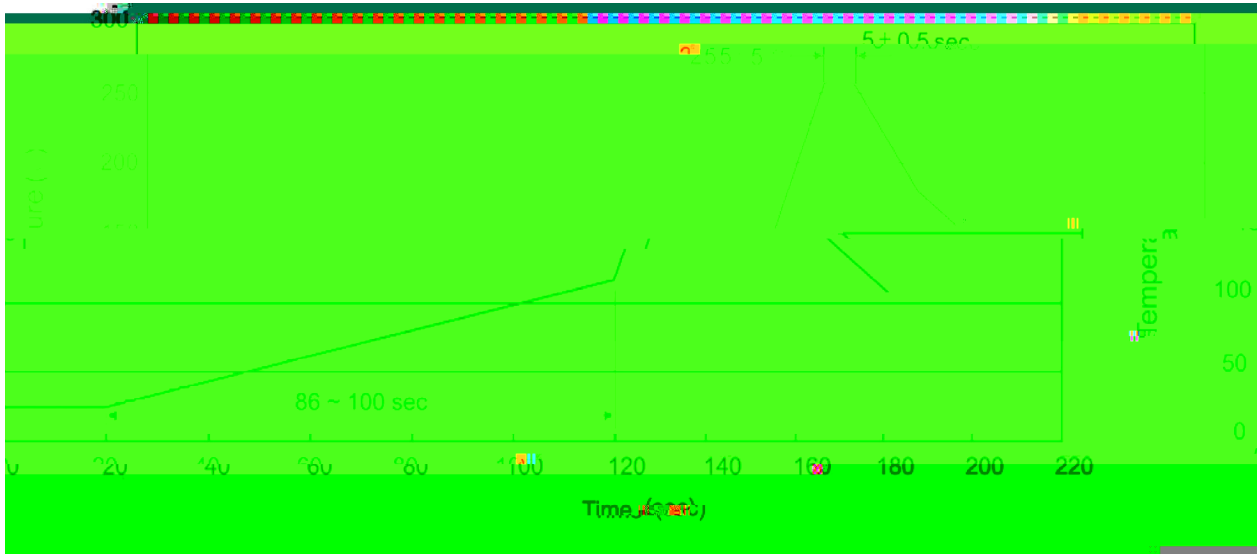

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

C.