

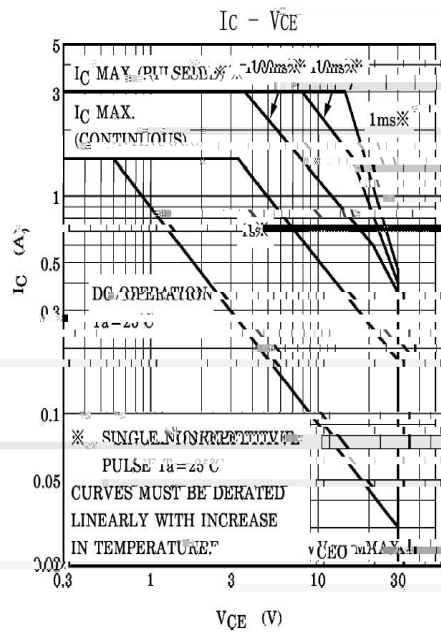
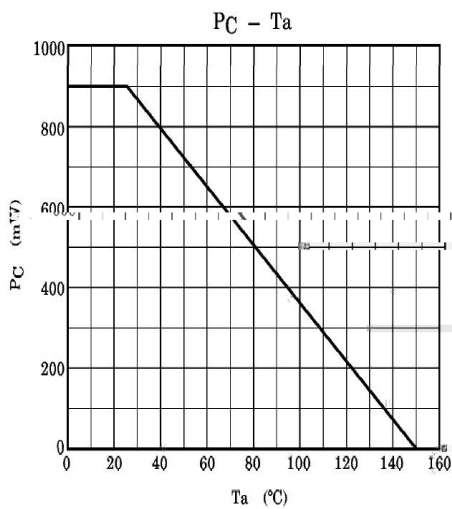
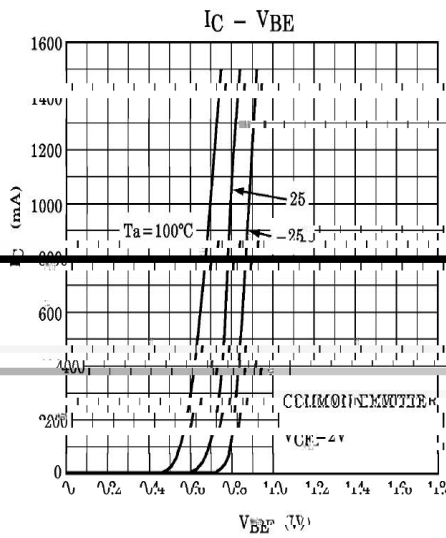
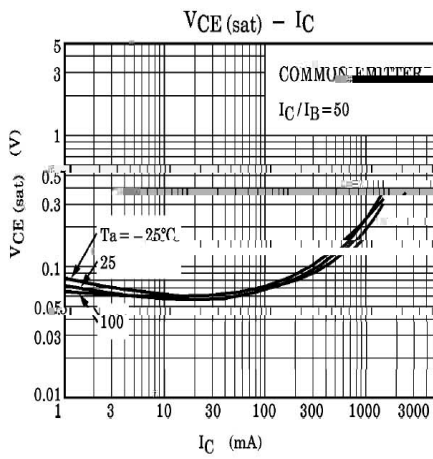
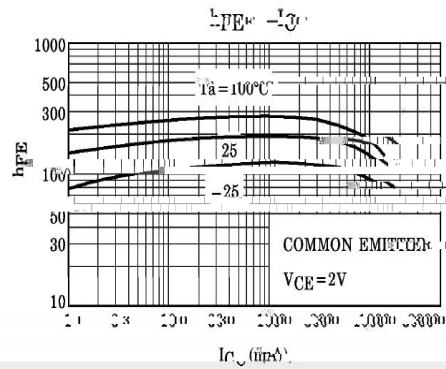


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	30	V

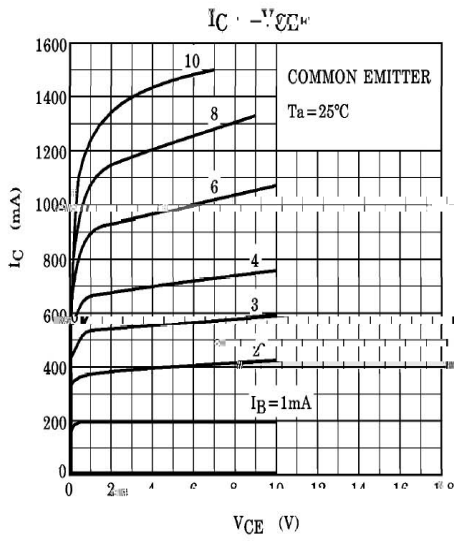


TO-92LM

Unit: mm

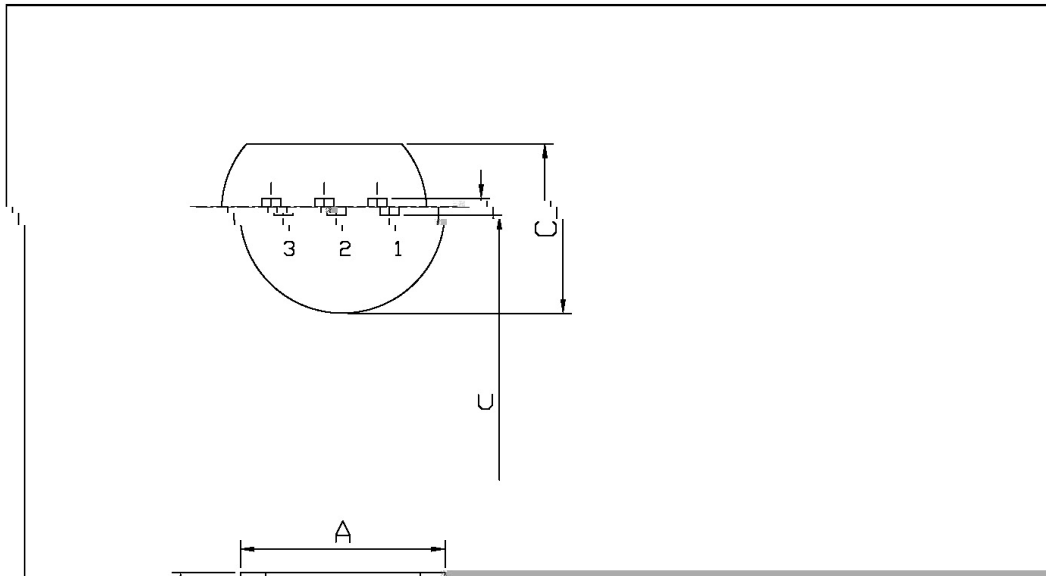

Symbol	Dimensions In Millimeters	
	Min	Max
A	4.47	5.1
C	1.27	1.52
U	1.27	1.52



BR:

C2236

O: h_{FE}


Note:

BR: Company Code.

C2236: Product Type.

O: h_{FE} Classifications Symbol

****: Lot No. Code,code change with Lot No.

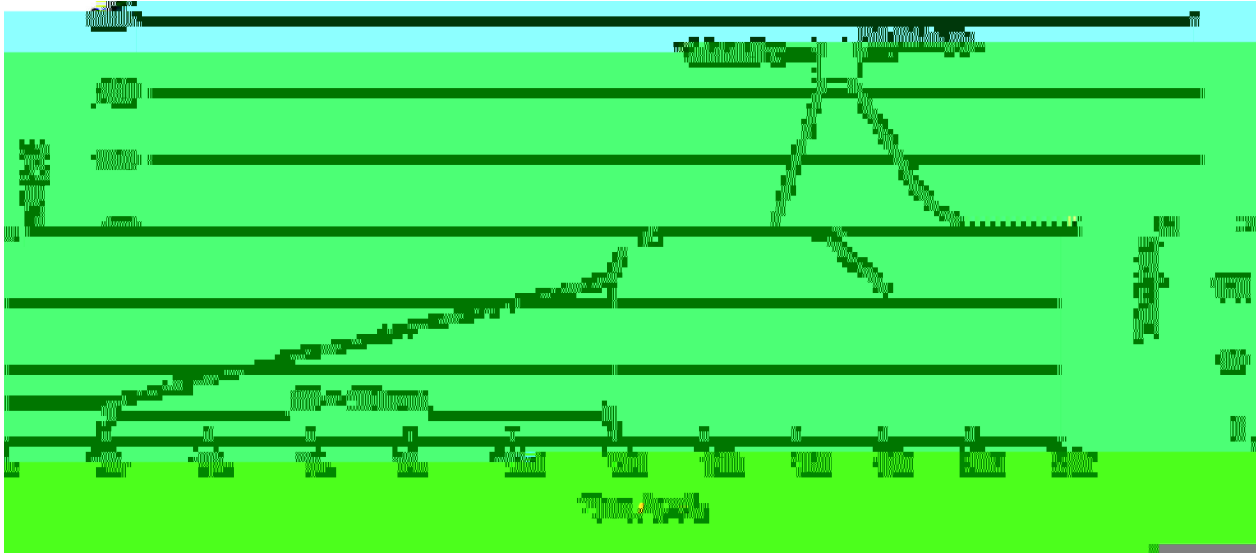

- | | | | | |
|---|-------|-----|-----------|--------|
| 1 | 25 | 150 | 60 | 90sec; |
| 2 | 255±5 | | 5±0.5sec; | |
| 3 | | 2 | 10 | /sec. |

Note:

1. Preheating: 25~150 , Time: 60~90sec.
2. Peak Temp.: 255±5 , Duration: 5±0.5sec.
3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp.: 270±5

Time: 10±1 sec

/ BULK