

Parameter

Symbol

Rating

Unit


/ Electrical Characteristic Curve

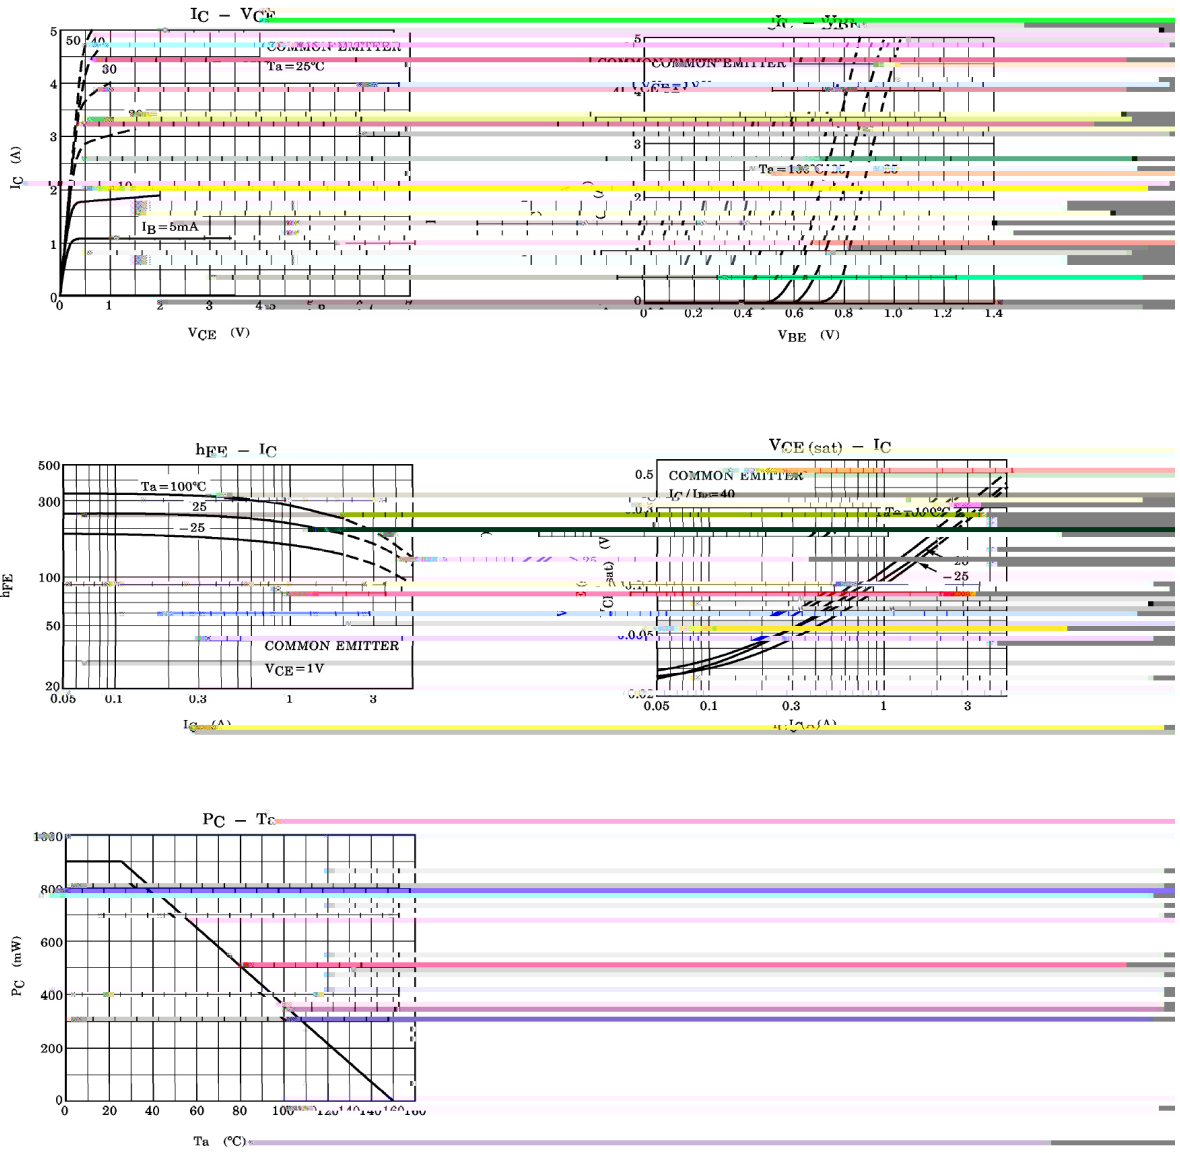


/ Package Dimensions


T0-92LM

Unit: mm

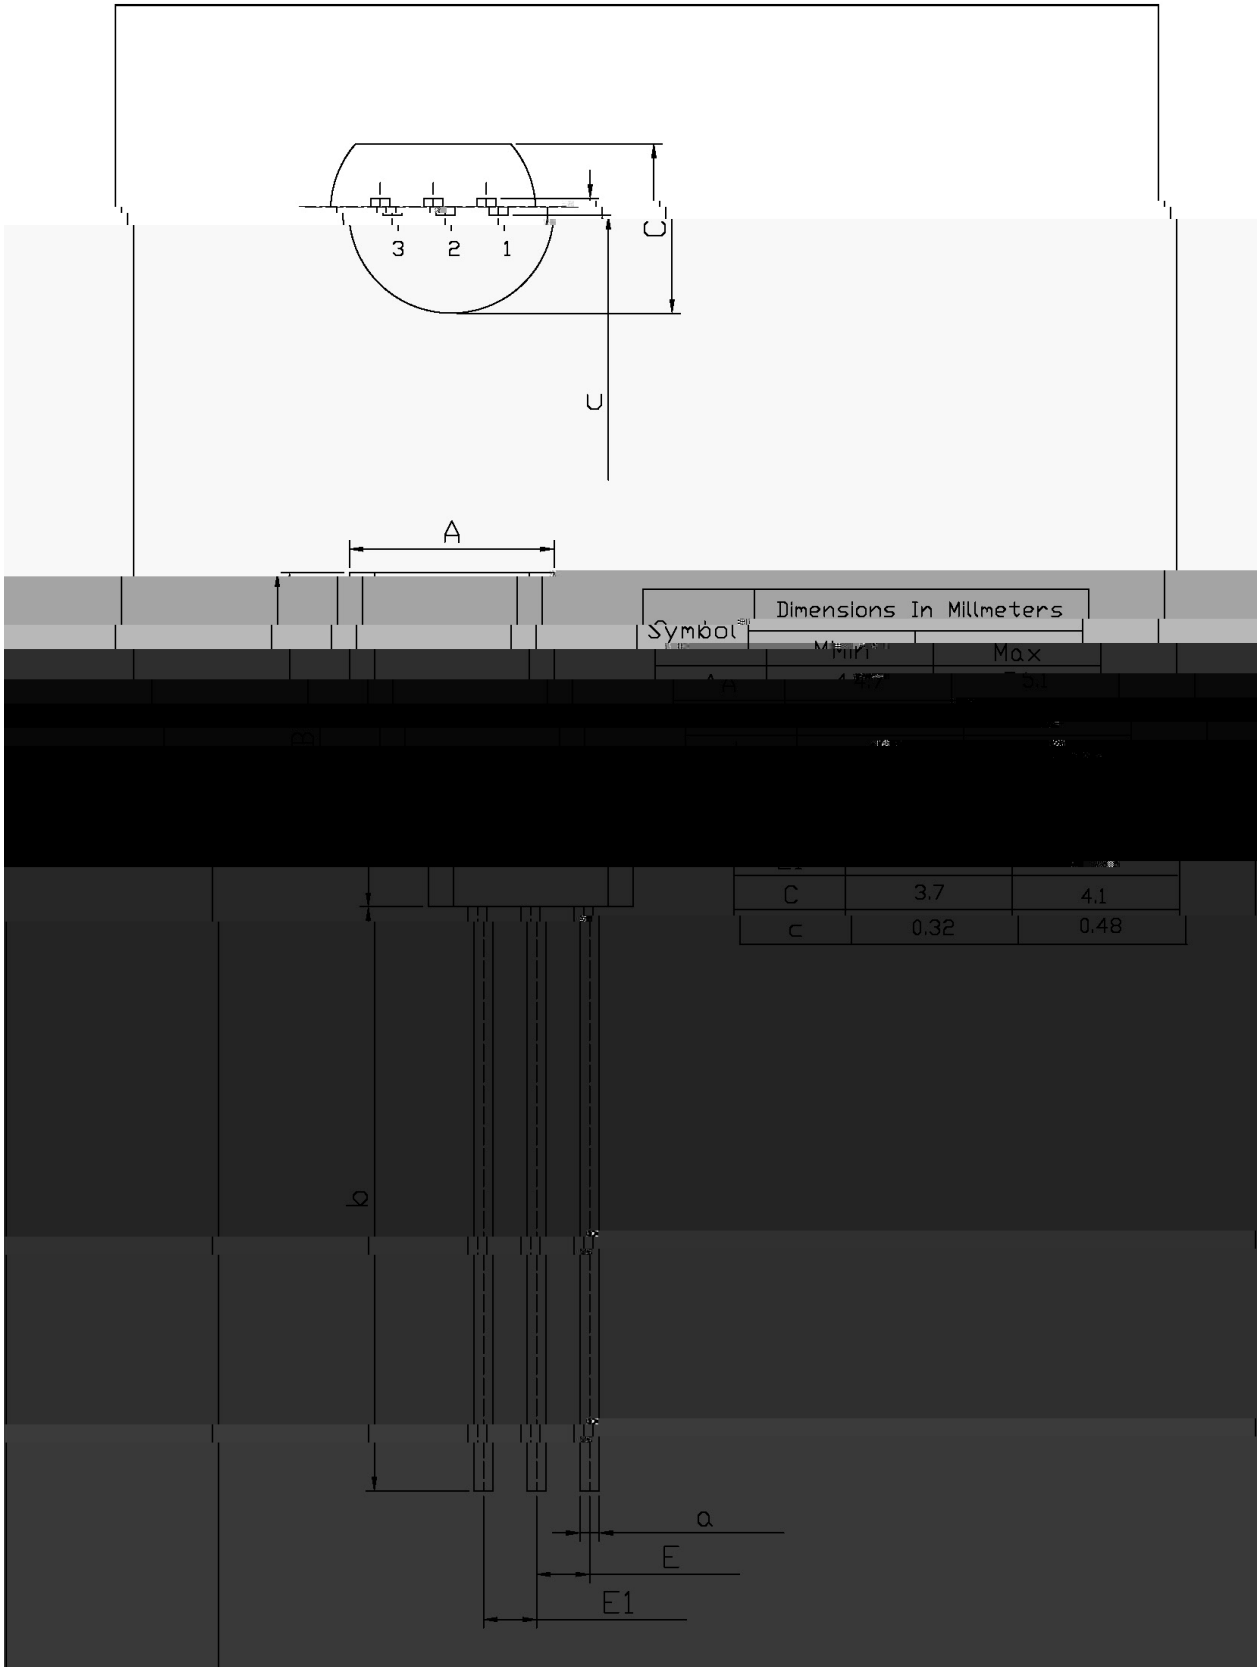

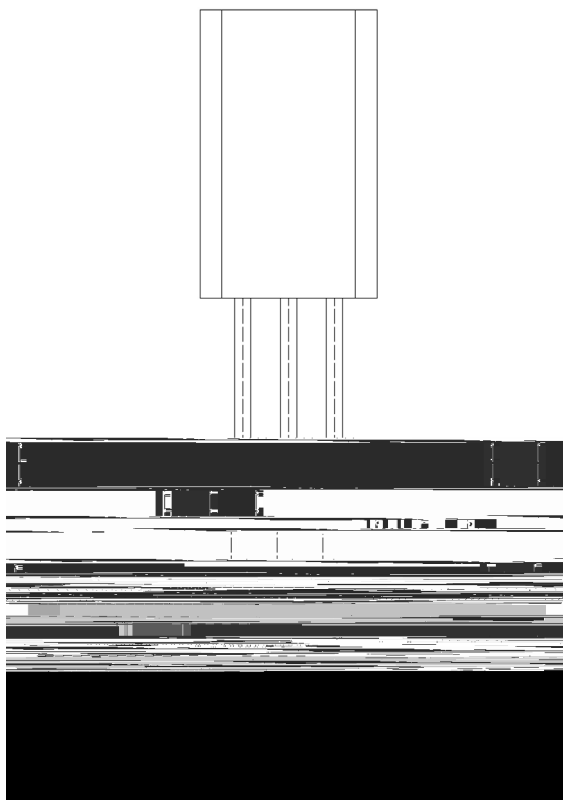

() / Temperature Profile for Dip Soldering(Pb-Free)

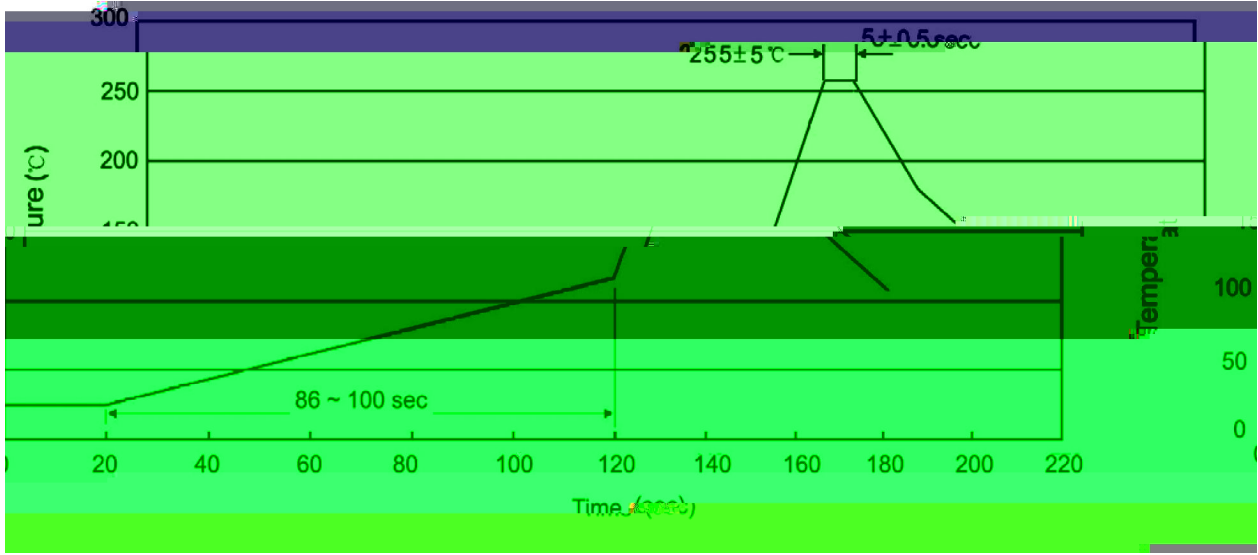

- | | | | | | | |
|---|-------|-----|-------|--------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | Note: | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5 | sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. | |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK