

**2SC2881A**  
Rev.E Mar.-2016


JFK\$0

E GE

Silicon NPN transistor in a SOT-89 Plastic Package.







# # )J8()' (8

High  $f_T$ , high  $V_{CE0}$ , small flat package, complementary pair with 2SA1201A.



Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V		


/ Electrical Characteristic Curve

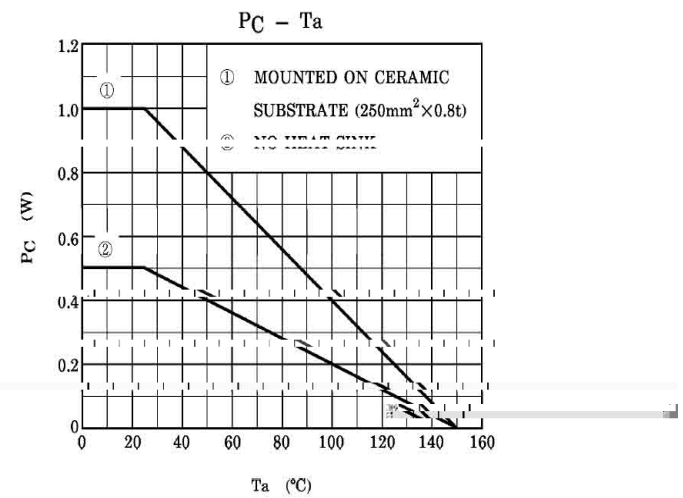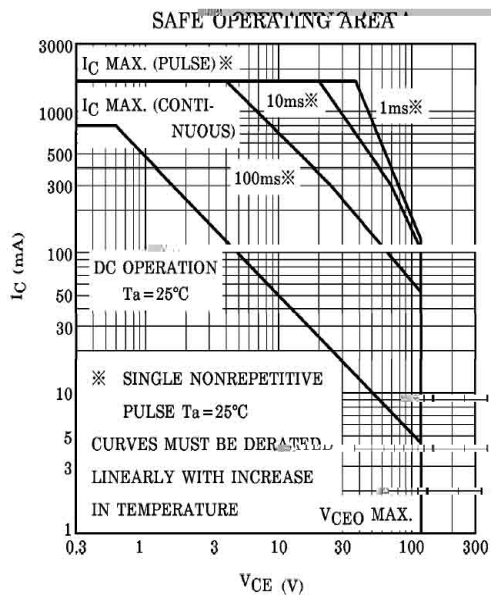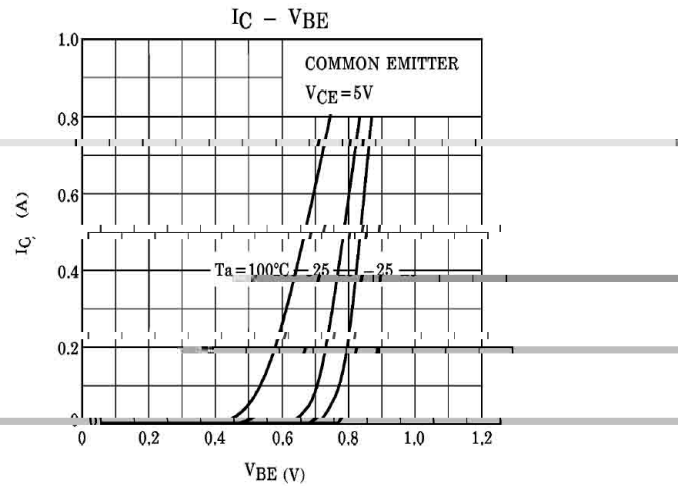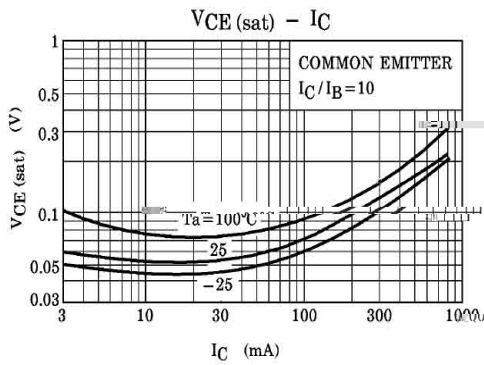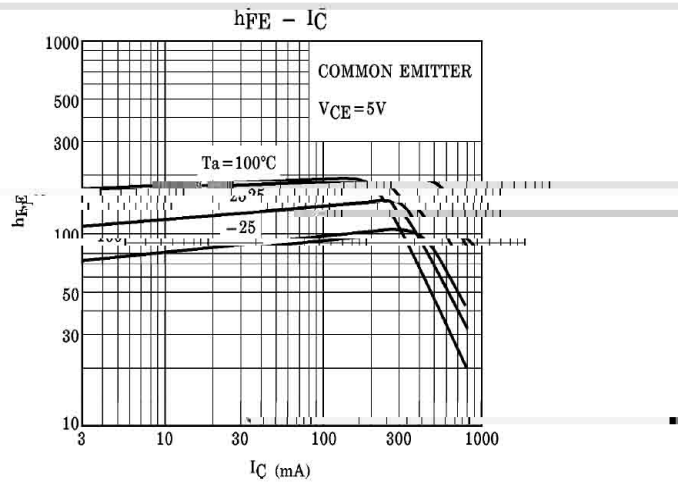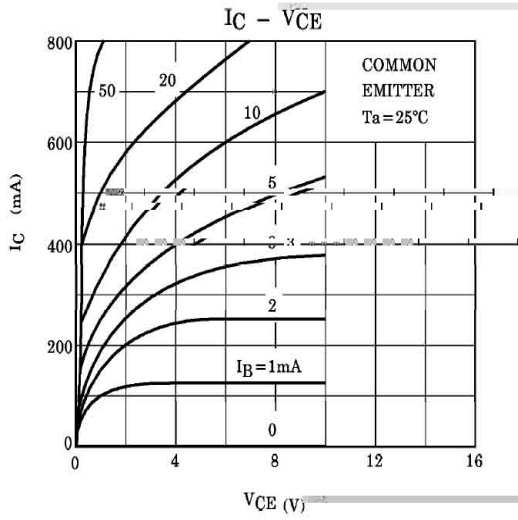


/ Package Dimensions


SOT-89

单位: mm

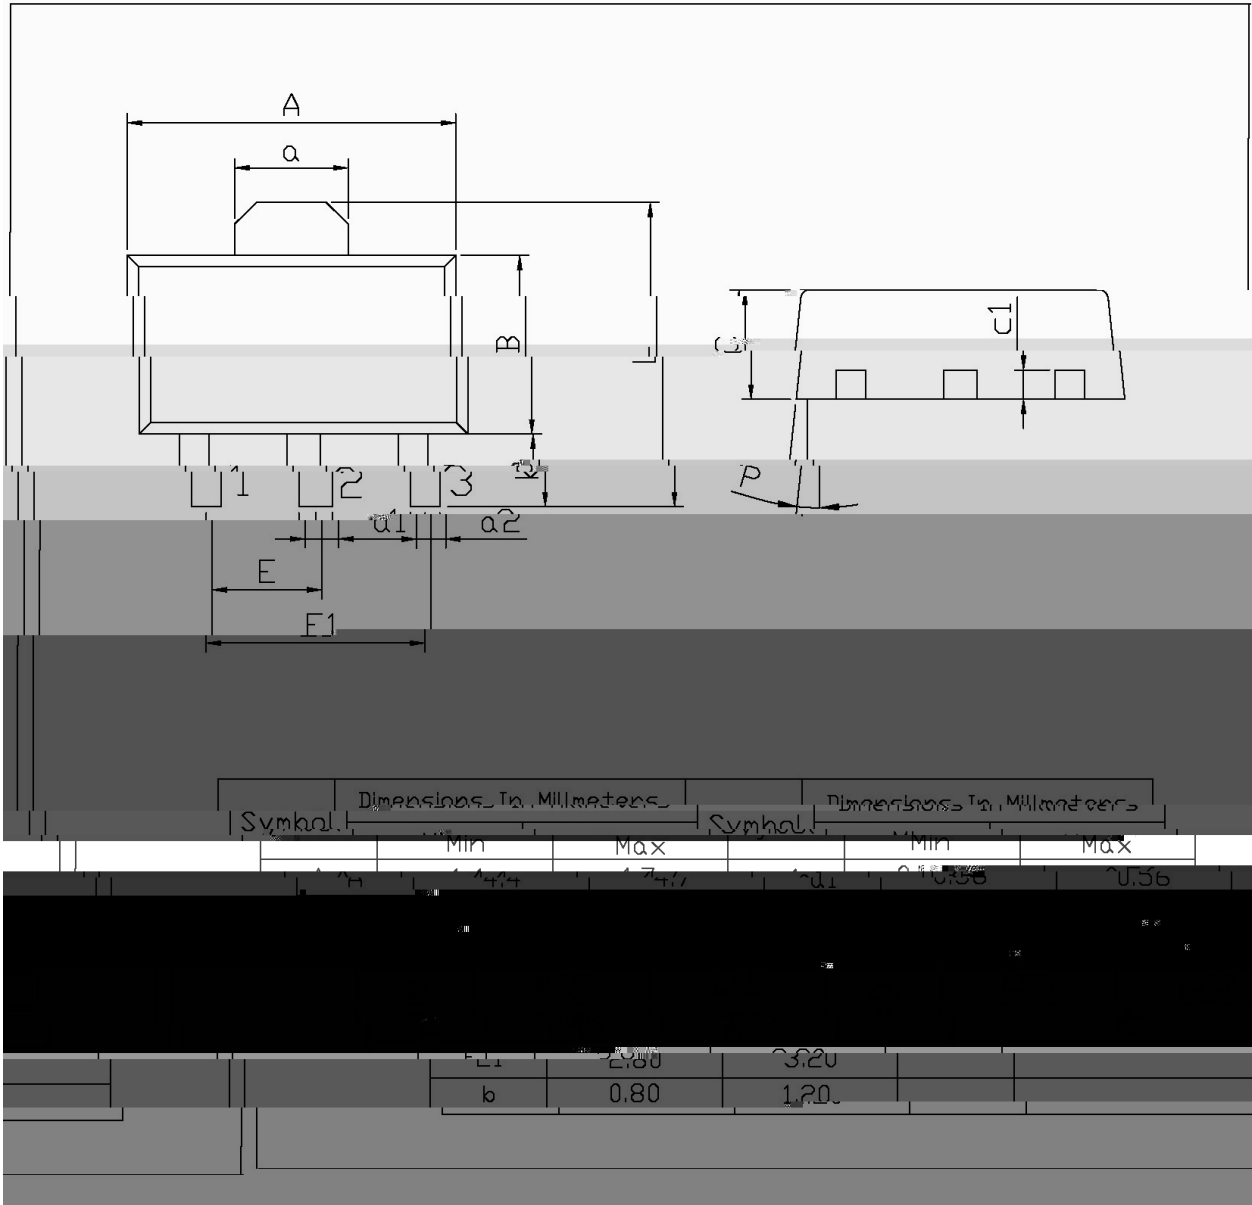

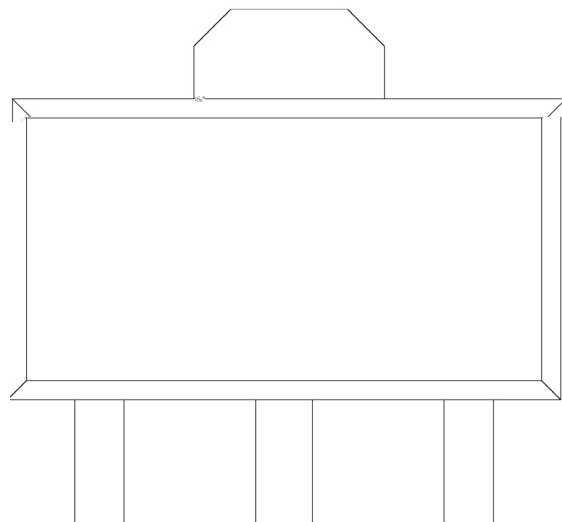

( ) / K\ d g\ iXk i\ \Gif] \d ]fi @ ' I \]fn Jfd \i e^ ZGY\$=i\ \z

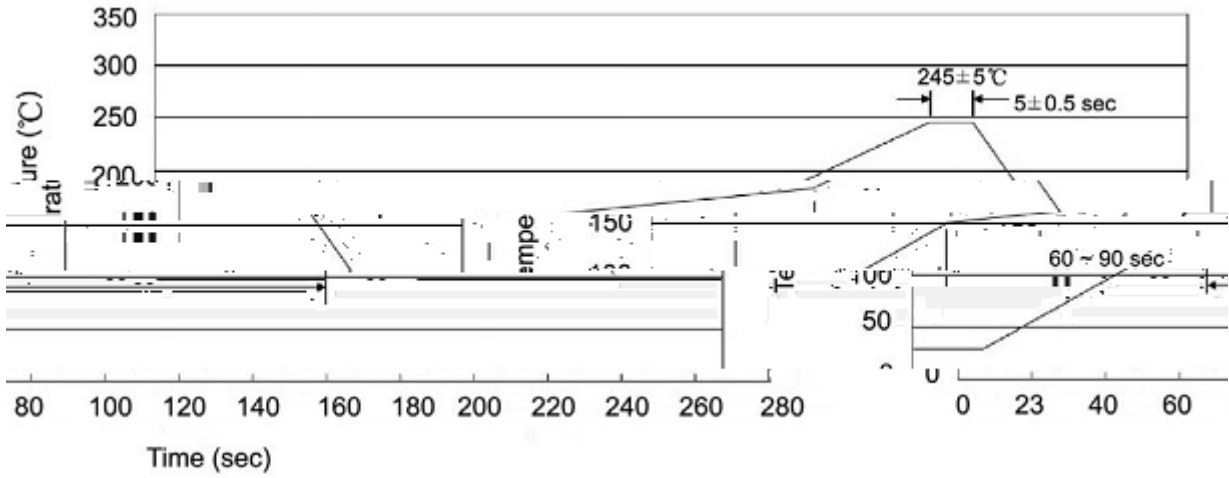

Note:

- |   |        |     |            |        |   |
|---|--------|-----|------------|--------|---|
| 1 | 25     | 150 | 60         | 90sec; | 1.Preheating:25~150 , Time:60~90sec.      |
| 2 | 245..5 |     | 5..0.5sec; |        | 2.Peak Temp.:245..5 , Duration:5..0.5sec. |
| 3 |        | 2   | 10         | /sec.  | 3. Cooling Speed: 2~10 /sec.              |

/ Resistance to Soldering Heat Test Conditions

260..5                      10..1 sec.                      Temp.:260±5                      Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm <sup>3</sup> )		
	只卷盘	卷盘盒	只盒	盒箱	只箱	盒	箱	

/ Notices