

/ Descriptions


JF K\$*) * E GE

/ Features

)J8(-((

/ Applications

/ Equivalent Circuit



/ Pinning





/ Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

						μ
						μ


/ Electrical Characteristic Curve

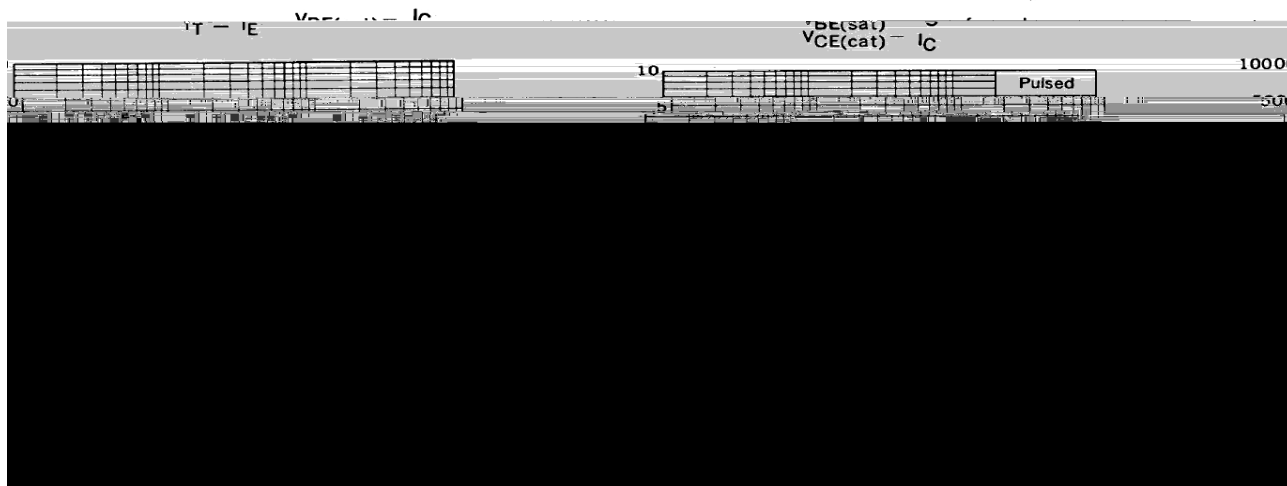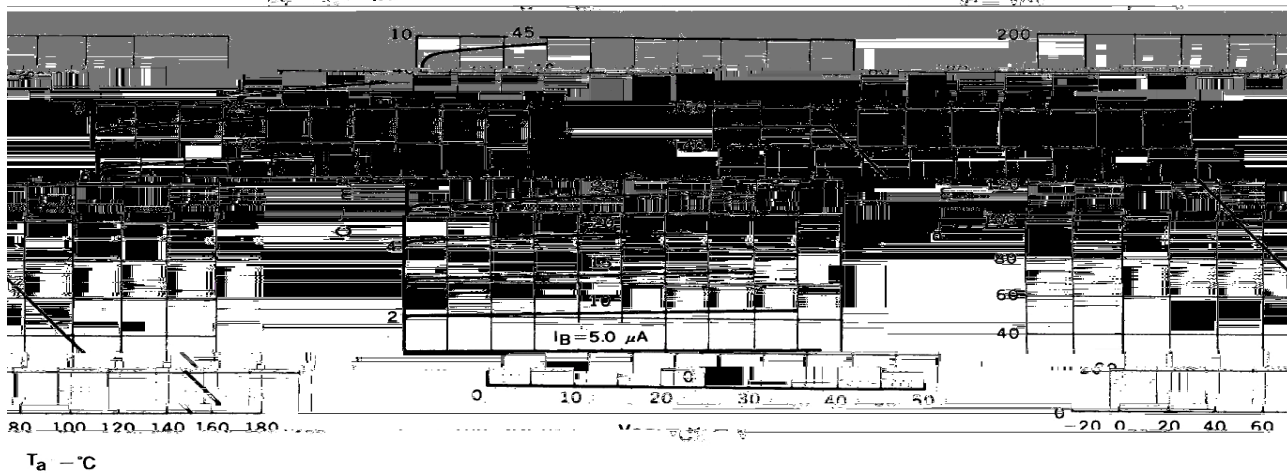


/ Package Dimensions

SOT-323


单位: mm

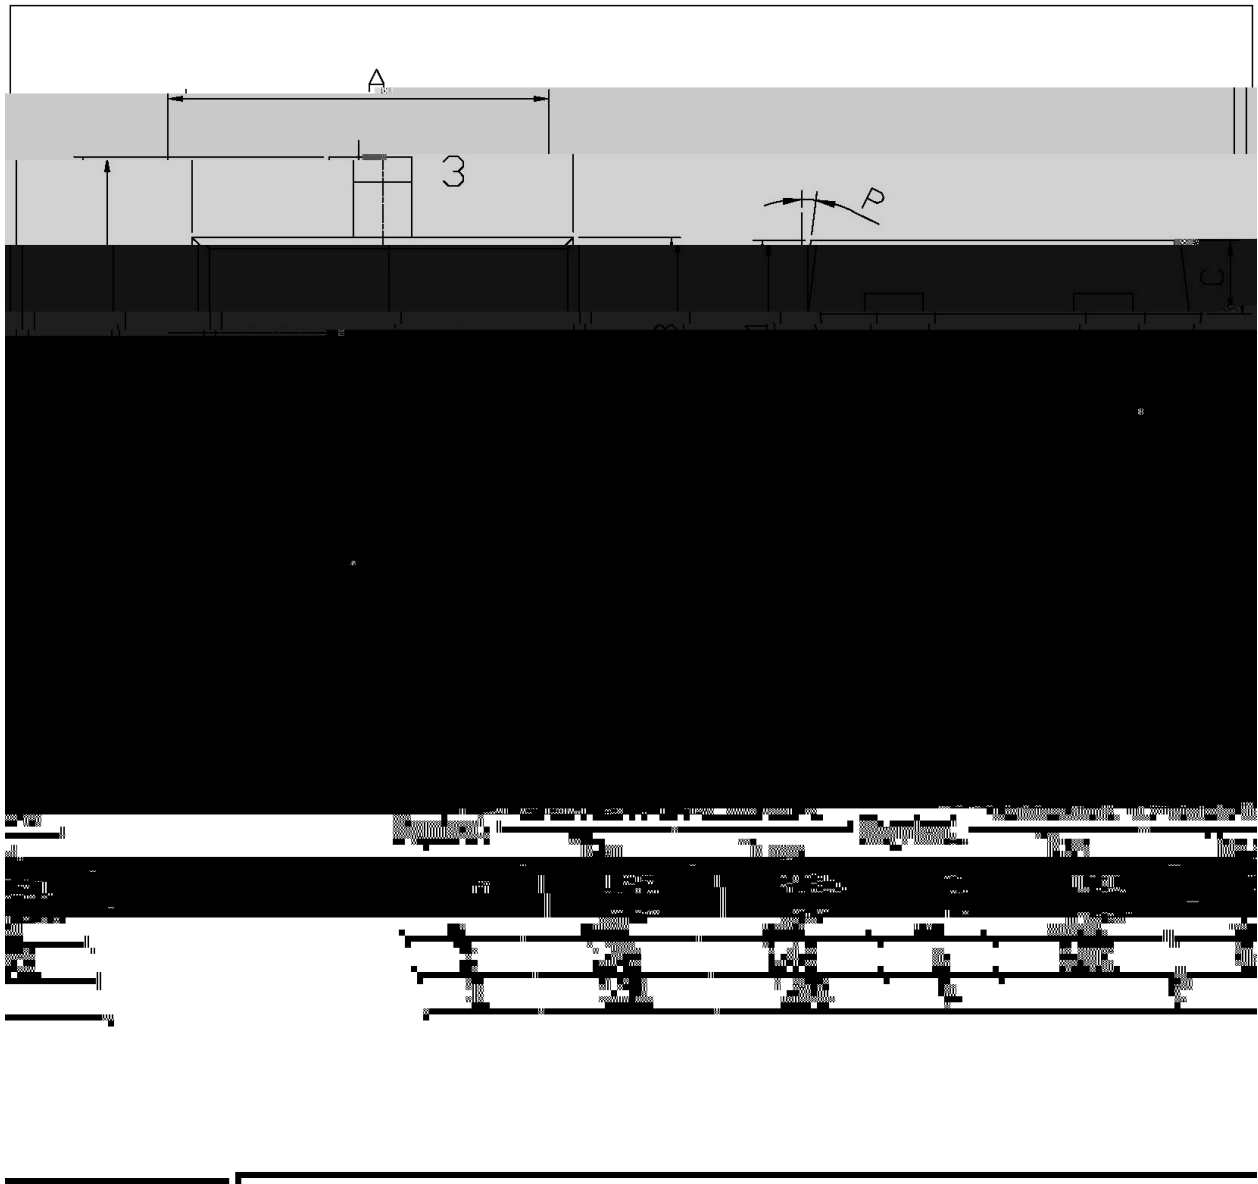

/ Marking Instructions

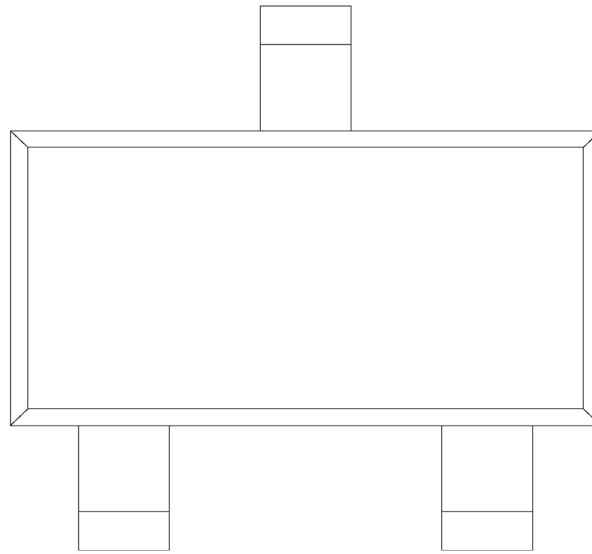

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

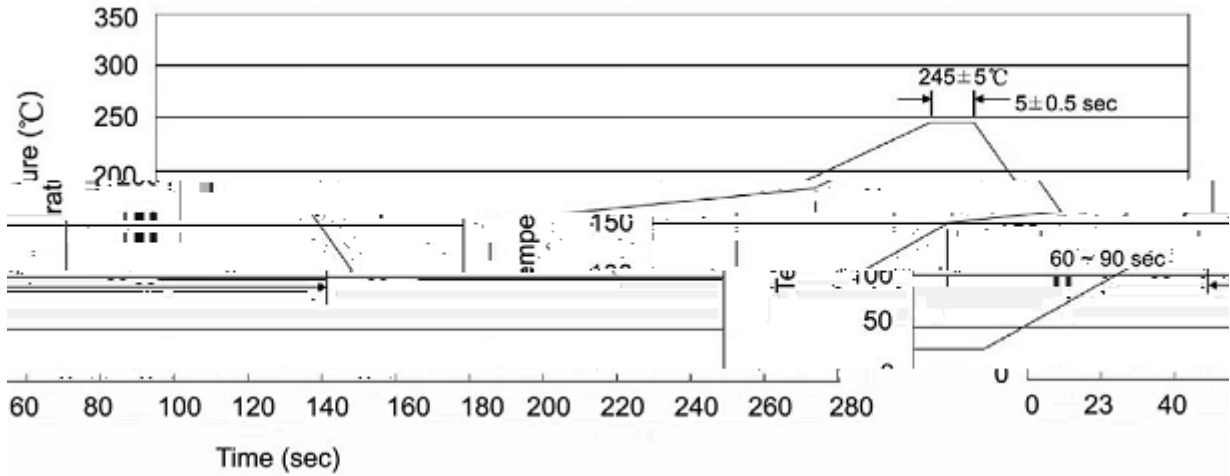

...

/ Resistance to Soldering Heat Test Conditions

...

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 × 8	180×120×180	390×385×205

/ Notices