

5 é

:5 .> // x 9 ² ... ~ož Voltage Regulator in a TO-92 Plastic Package.

α a

€ 19 ² ... ~k ÿ ß v ä S' Ä — ½ ' y ? è ' ò ož


3-Terminal regulators ,output current up to 100 mA, internal thermal overload protection and short-circuit limiting.

Đ ÷


9 ² ... ~ož

Voltage Regulator.

Ã W] Ô . € Đ Ô .

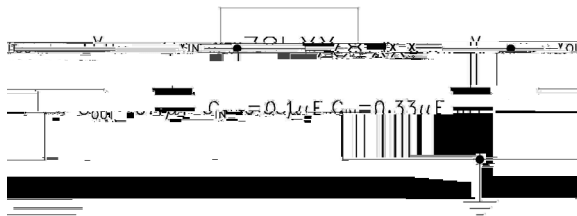

• Ū - æ

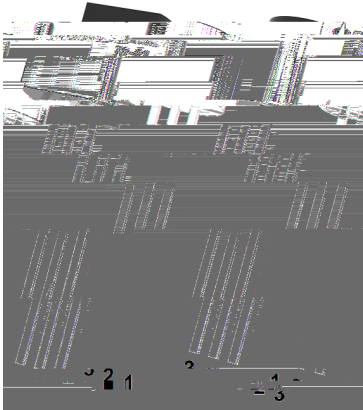

PIN1 y IN

PIN 2 y GND

PIN 3 y OUT

, M V

• - ~ a ø ož

See Marking Instructions.

表 1

;

@ f Parameter	... Z Symbol	f › Rating	% y Unit
Input voltage	V _I	30	V
Output current	I _O	100	mA
Operating Temperature Range	T _{OPR}	-40 125	
Power Dissipation	P _D	500	mW
Storage temperature range	T _{stg}	-65 150	



表 2

; g

g

@ f Parameter	... Z Symbol	y j Ú ^ Test Conditions	Â 4 › Min	Á ° › Typ	Â Ý › Max	% y Unit
Output voltage	V _O	I _O = 40mA T _j = 25	4.80	5.0	5.2	V
		I _O = 1mA to 40mA V _I = 7V to 20V	4.75	5.0	5.25	V
		I _O = 1mA to 70mA V _I = 10V	4.75	5.0	5.25	V
Input regulation	. V _O	V _I = 7V to 20V T _j = 25		32	150	mV
		V _I = 8V to 20V T _j = 25		26	100	mV
Output regulation	. V _O	I _O = 1mA to 100mA T _j = 25		15	60	mV
		I _O = 1mA to 40 mA T _j = 25		8	30	mV
Ripple rejection	RR	V _I = 8V to 18V f = 120Hz T _j = 25	41	49		dB
Output noise voltage	V _N	f = 10Hz-100KHz T _j = 25		42		V
Dropout voltage	V _D	T _j = 25		1.7		V
Bias current	I _Q	T _j = 25		3.8	6	mA
		T _j = 125			5.5	mA
Bias current change	. I _Q	V _I = 8V to 20V			1.5	mA
		I _O = 1mA to 40mA			0.1	mA


Ô ? d • Ž ç

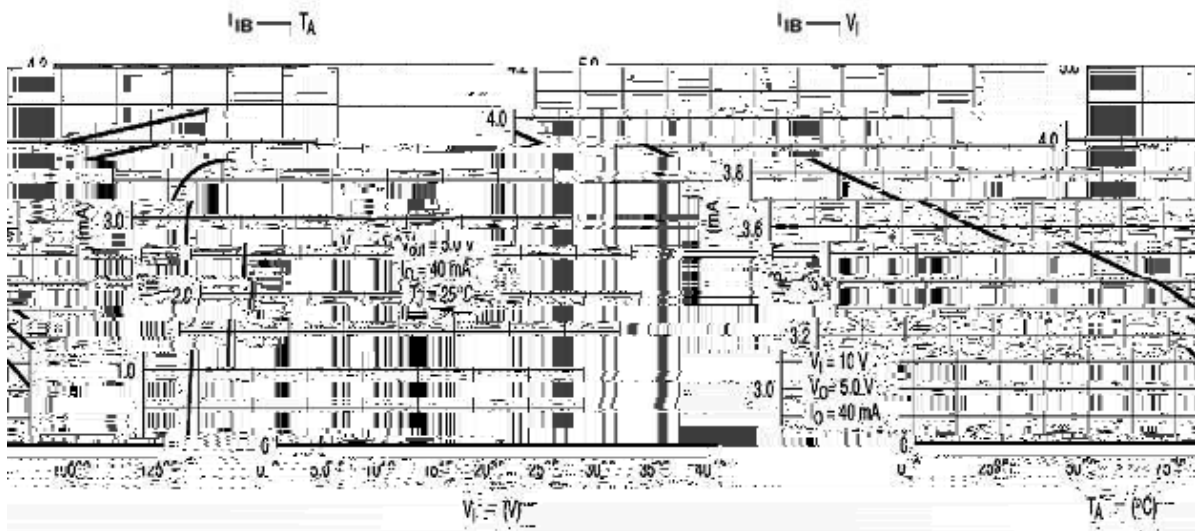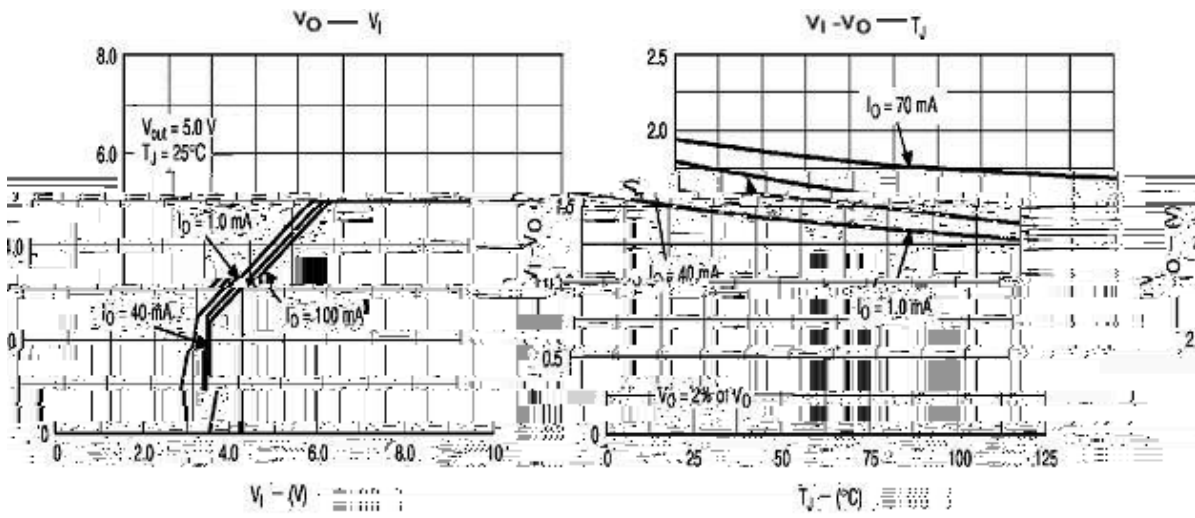


Ø □ =) φ

T0-92

Unit: mm

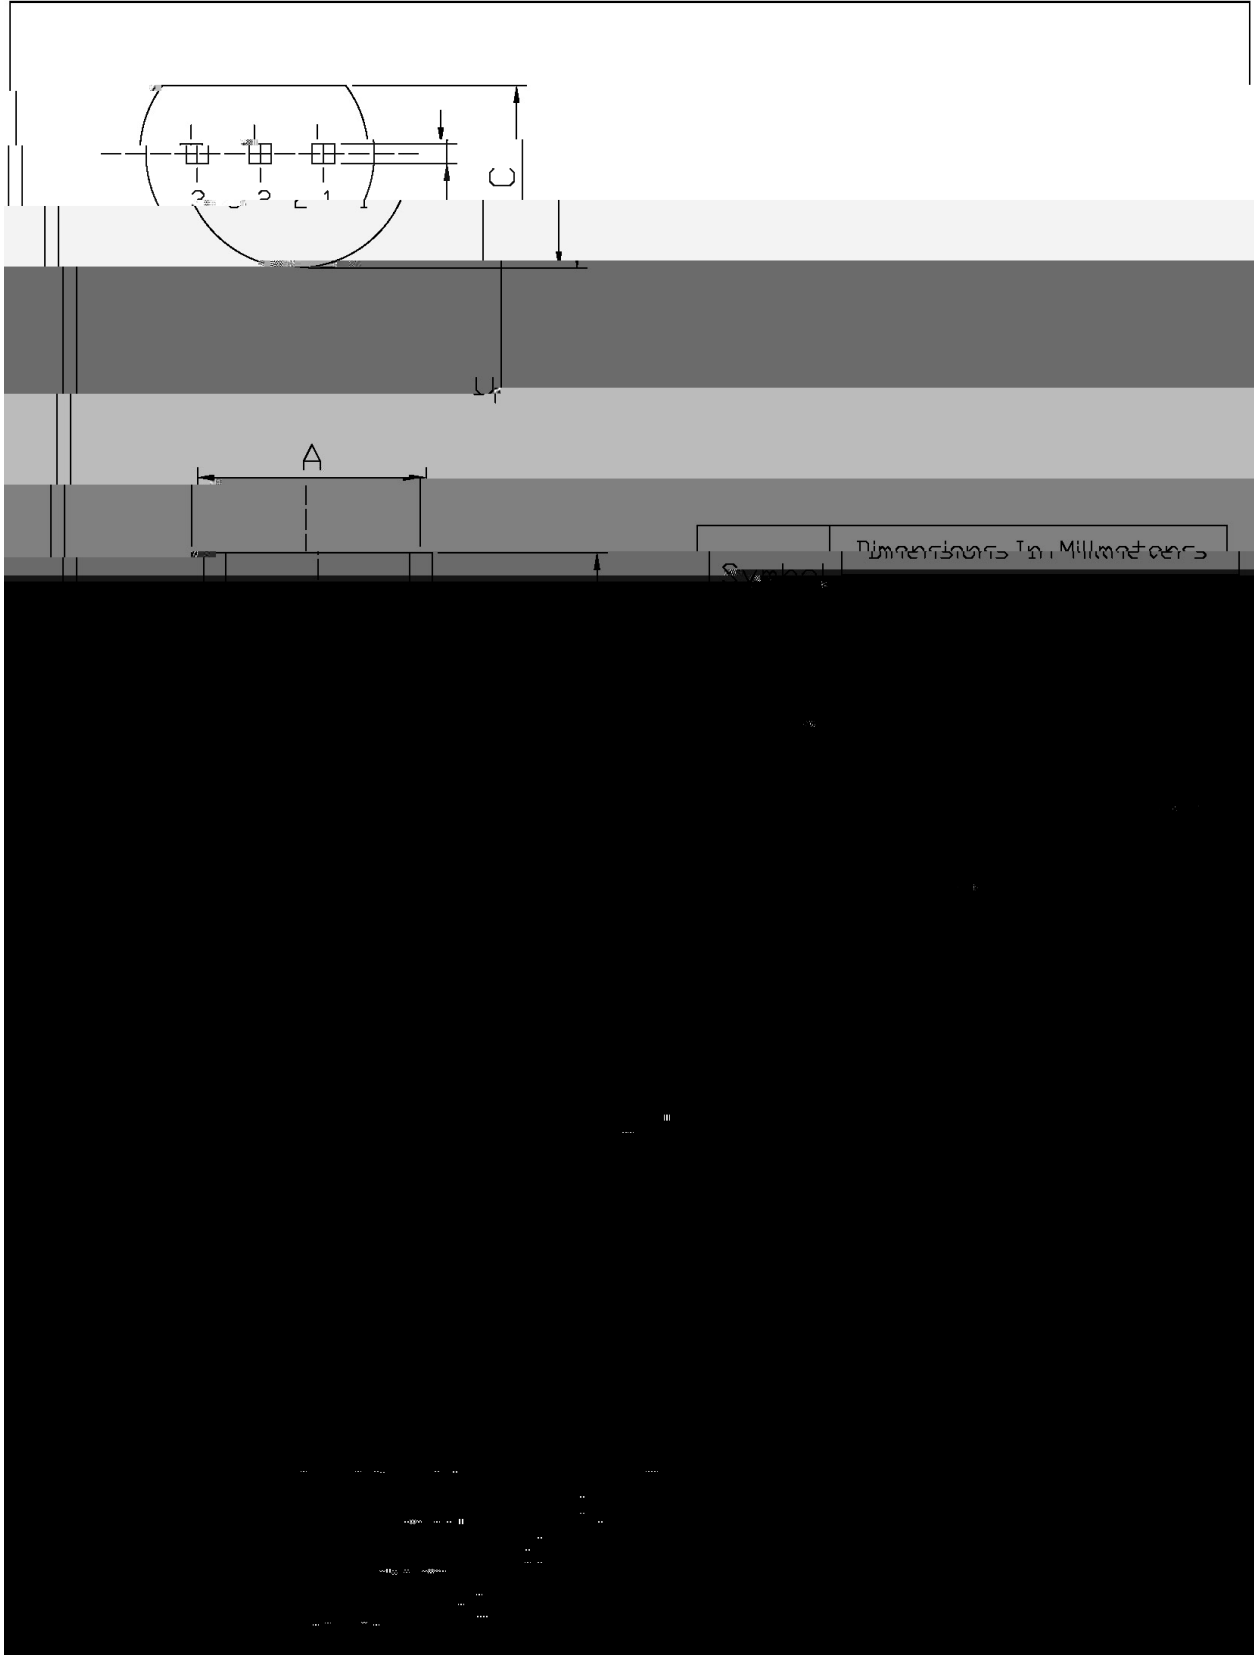

, M y f

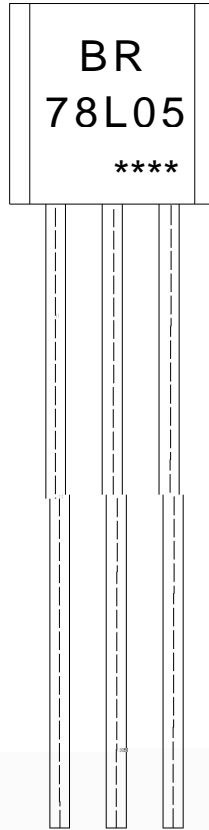

^a ϕ y
 (8 y , [W A
 2 y D } ° Z
 y ÿ D Z W A k š ÿ D Z J

Note:

BR: Company Code

78L05: Product Type

****: Lot No. Code, code change with Lot No

G PD t... • Ž ϕ x /

a ϕ y

1o• Ä ½ “ † 25 ½150 - k ž • 60 ½90sec;

2o• Q › “ † 255 r5 - k ž • 4 Ò 5 r0.5sec;

3o•D N ò i Ò 0 , † 2 ½10 - /sec.

Note:

1.Preheating:25~150 - , Time:60~90sec.

2.Peak Temp.:255 r5 - , Duration:5 r0.5sec.

3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p¯ »]

“ † y 270 r5 -

ž • y 10 r1 sec.

Temp.:270±5

Time:10±1 sec

G P á

• ^ x / BULK