
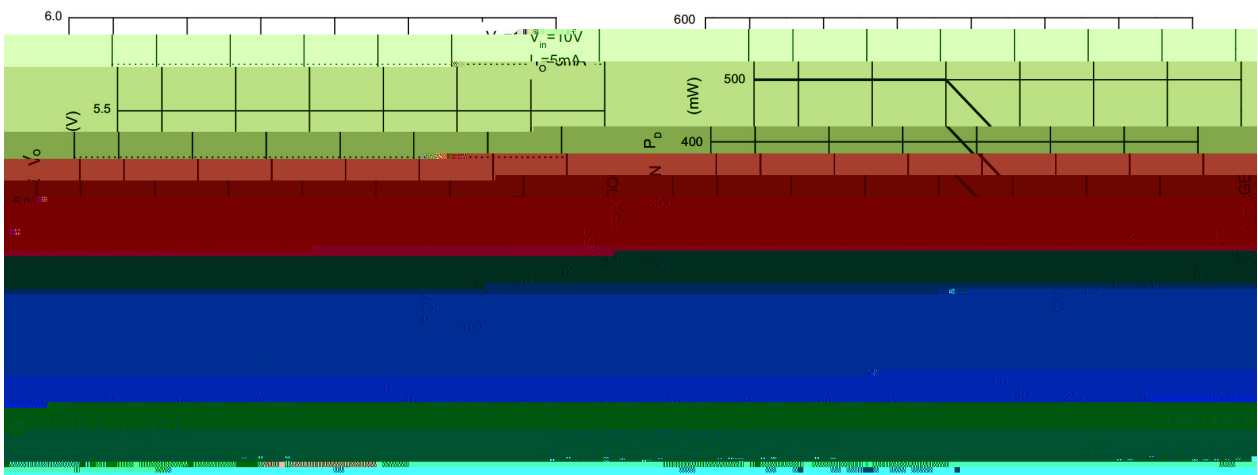
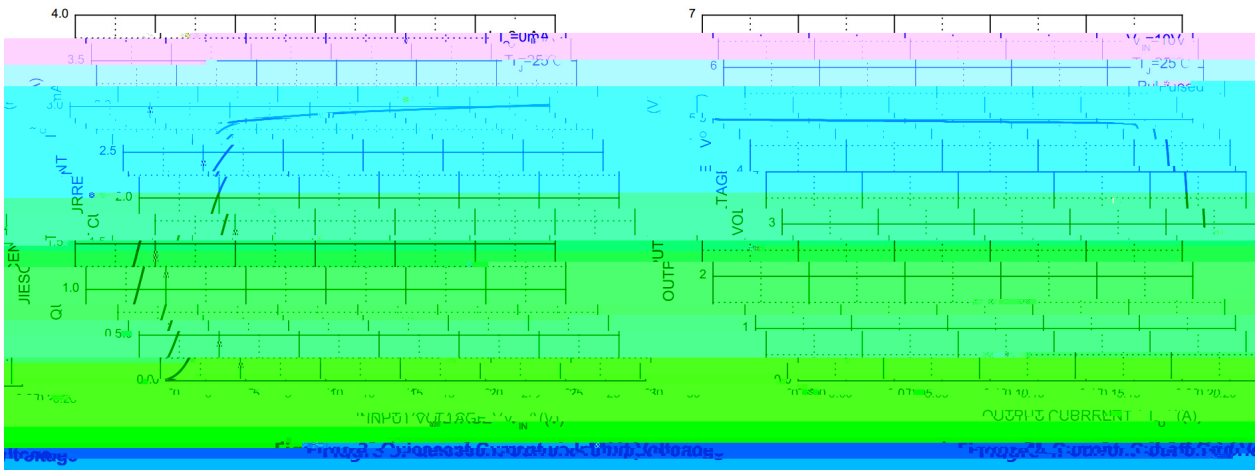


Parameter	Symbol	Rating	Unit
Input voltage	V_I	36	V
Output current($V_I=8V$)	I_O	100	mA
Operating virtual Junction temperature	T_J	0 125	
Power Dissipation	P_D	500	mW
Storage temperature range	T_{stg}	-65 150	
Thermal resistance junction-ambient	R_{JA}	200	/W

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output voltage	V_O	$I_O = 40mA$ $T_J=25$	4.80	5.0	5.2	V
		$I_O=1mA$ to 40mA $V_I=7V$ to 20V	4.75	5.0	5.25	V
		$I_O=1mA$ to 70mA $V_I=10V$	4.75	5.0	5.25	V
Input regulation	V_O	$V_I=7V$ to 20V $T_J=25$		32	150	mV


/ Electrical Characteristic Curve

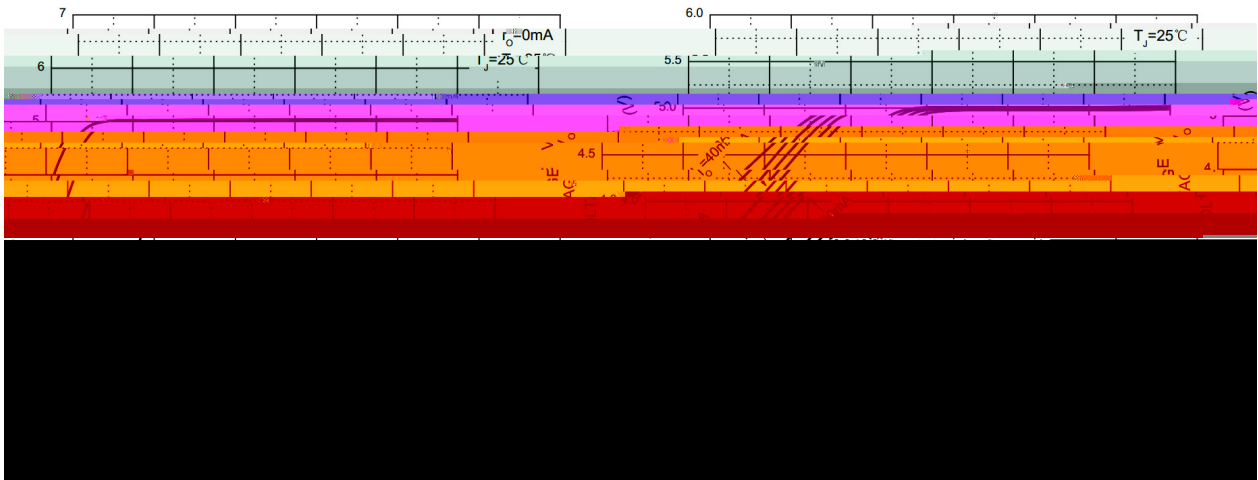


/ Package Dimensions

78L05AT-89

单位: mm

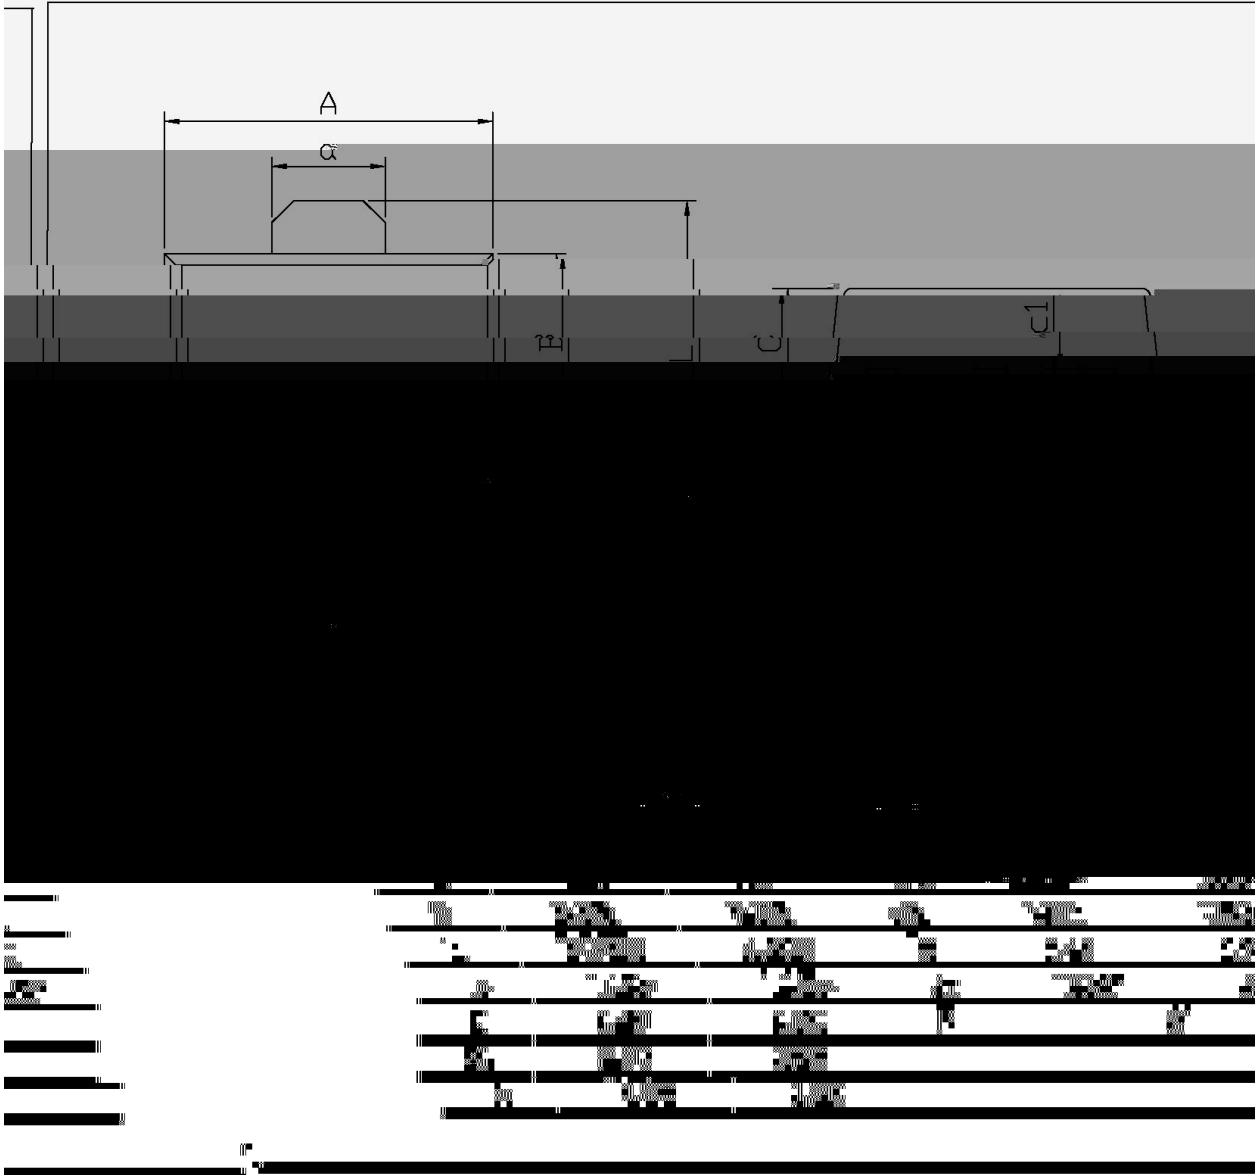

/ Marking Instructions

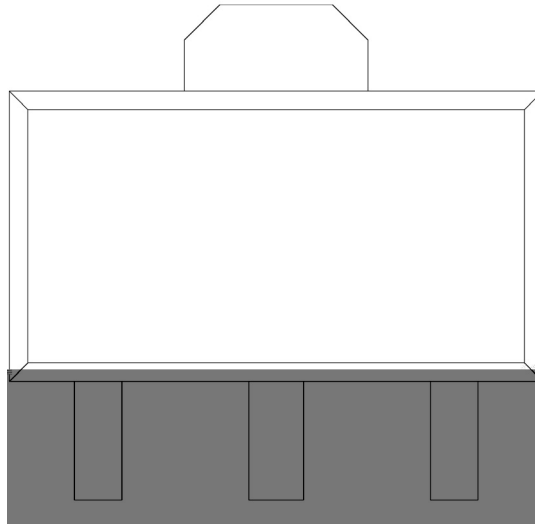

H
L05

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

- | | | | | | |
|---|-------|-----|----|-----------|--|
| | | | | | |
| 1 | 150 | 180 | 60 | 90sec; | Note:
1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ REEL

Package Type	Units	Dimension (unit mm ³)
--------------	-------	-----------------------------------