

ABS201~ABS210

Rev.G Mar.-2026

/ Descriptions

2.0A ABS/LBF
2.0A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.


/ Features

100V~1000V 2.0A
Glass Passivated Chip Junction, Reverse Voltage:100to1000V, Forward Current:2.0A, High Surge Current Capability, Designed for Surface Mount Application, Halogen free product.


/ Applications

General purpose.

/ Equivalent Circuit




/ Pinning

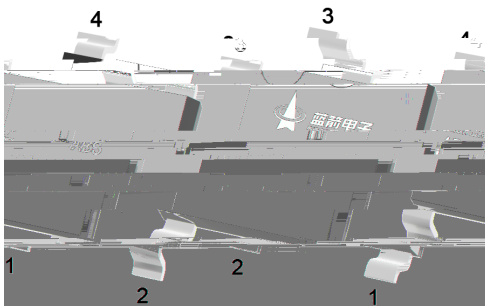

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
3	Output Anode

The recommended mounting and size

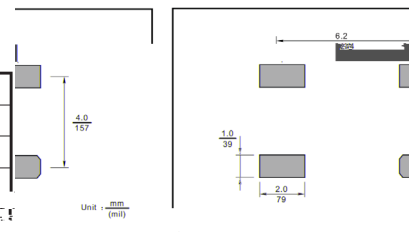

/ Marking

See Marking Instructions.

ABS201~ABS210

Rev.G Mar.-2026

Parameter	Symbol	Rating						Unit
		ABS201	ABS202	ABS204	ABS206	ABS208	ABS210	

ABS201~ABS210

ABS201~ABS210

Rev.G Mar.-2026

DATA SHEET

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

1 150 180 60