


Rev.E Mar.-2016

TO-92 PNP Silicon PNP transistor TO-92 Plastic Package.

Complementary pair with BC639.

High I_C , Complementary pair with BC639.

Driver stages of audio or video amplifiers applications.



PIN 1 Base PIN 2 Collector PIN 3 Emitter

h_{FE} Classifications Symbol	10	16
h_{FE} Range	63~160	100~250


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{76C}	-100	V
Collector to Emitter Voltage	V_{CEO}	-80	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-1.0	A
Peak Collector Current	I_{CM}	-1.5	A
Peak Base Current	I_{BM}	-200	mA
Total Power Dissipation	P_{tot}	830	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-30V$ $I_E=0$			-0.1	A
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-5.0V$ $I_C=0$			-0.1	A
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-2.0V$ $I_C=-150mA$	63		250	
	$h_{FE(2)}$	$V_{CE}=-2.0V$ $I_C=-500mA$	40			
	$h_{FE(3)}$	$V_{CE}=-2.0V$ $I_C=-5.0mA$	63			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-500mA$ $I_B=-50mA$			-0.5	V
Base to Emitter Voltage	V_{BE}	$I_C=-500mA$ $V_{CE}=-2.0V$			-1.0	V
Transition Frequency	f_T	$V_{CE}=-5.0V$ $I_C=-50mA$ $f=100MHz$	100			MHz



T0-92

Unit: mm

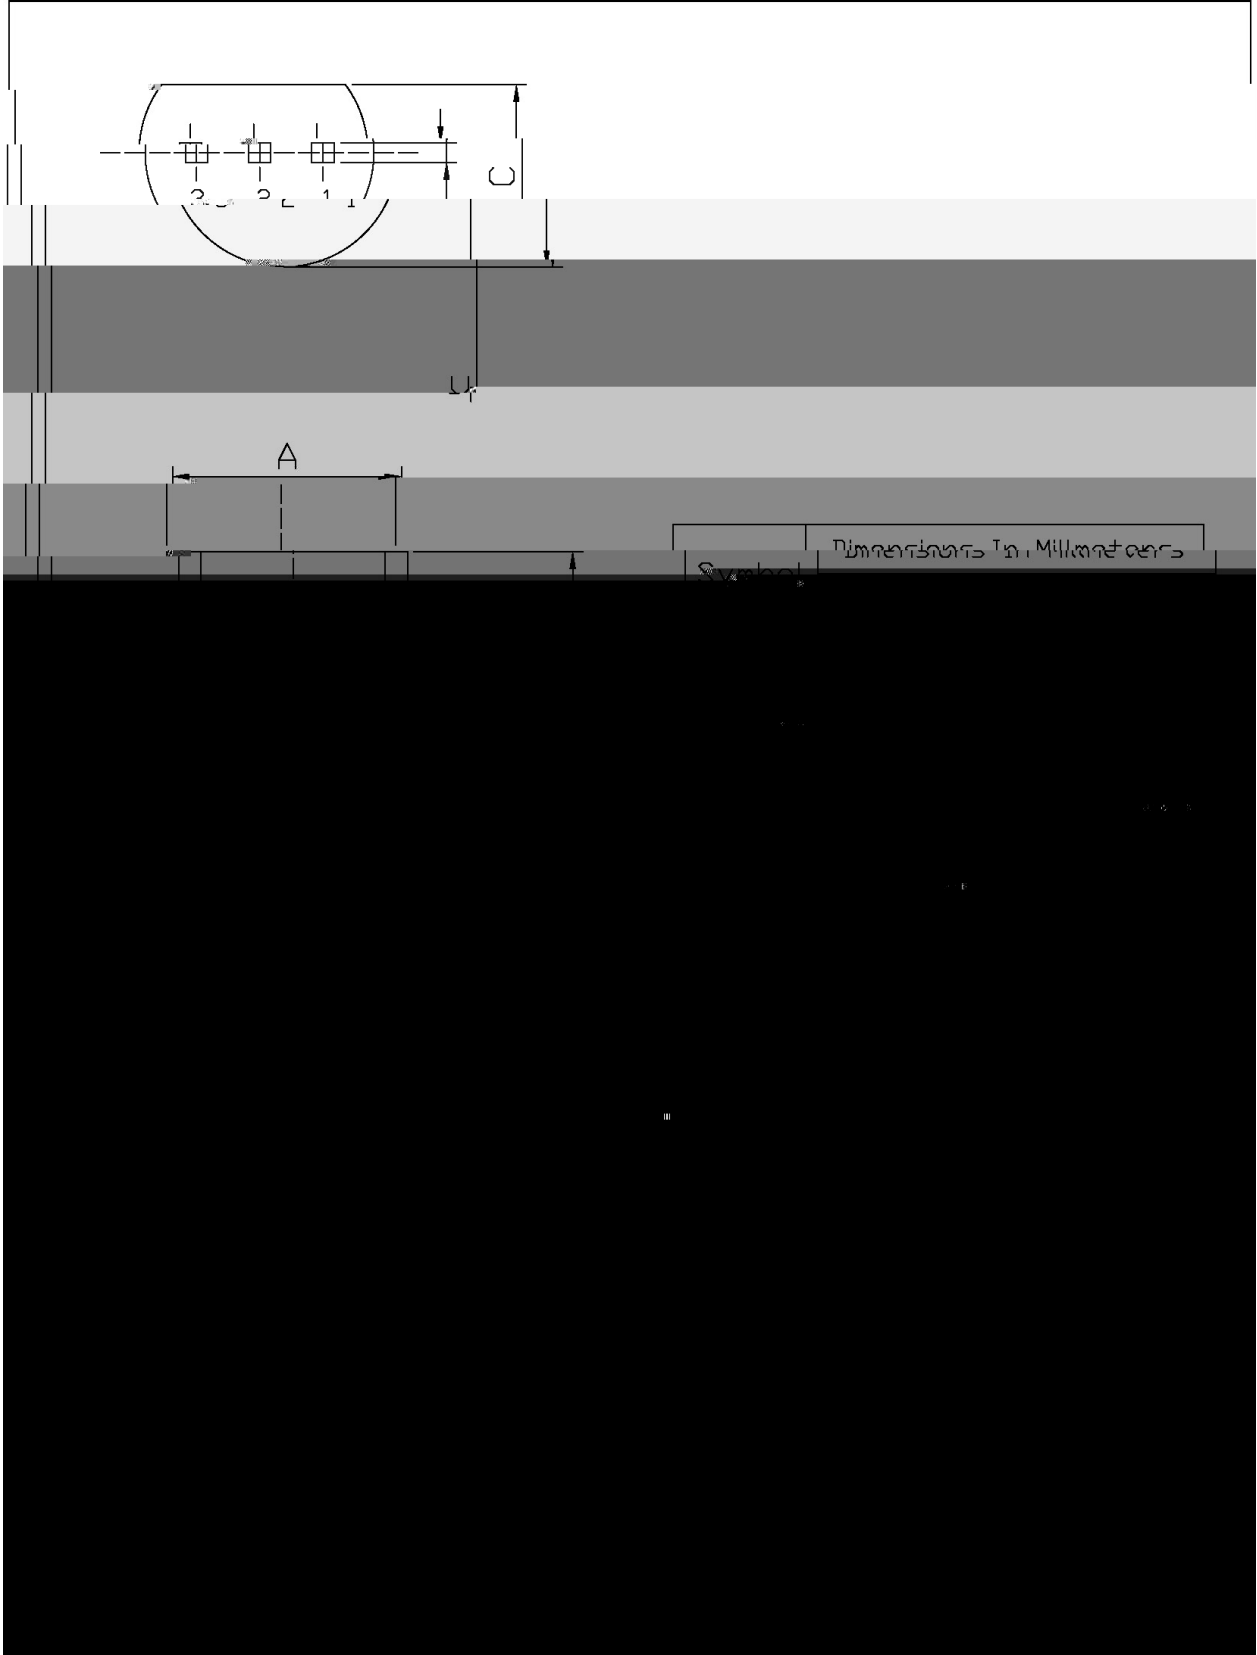

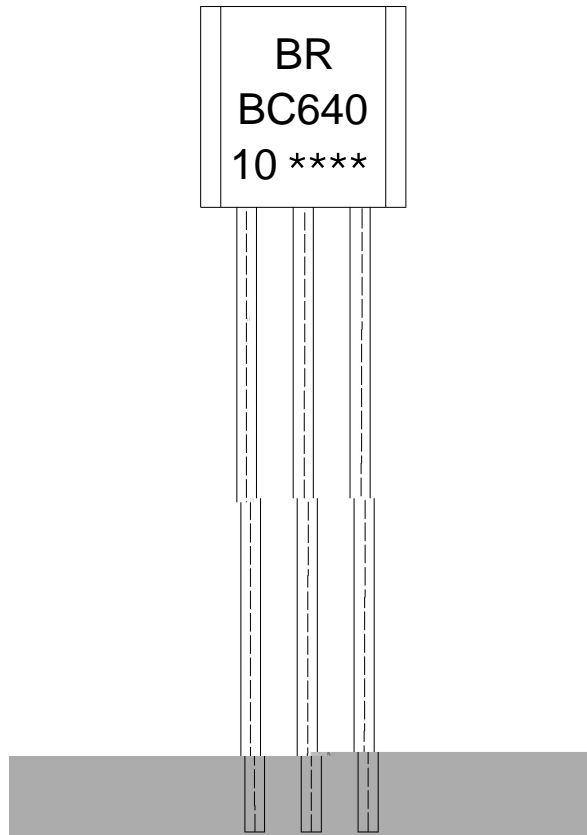

BR:

BC640

10:

h_{FE}

Note:

BR: Company Code.

BC640: Product Type.

10: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

