




**/ Absolute Maximum Ratings(Ta=25 )**

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	50	V
Collector to Emitter Voltage	$V_{CEO}$	45	V
Emitter to Base Voltage	$V_{EBO}$	5.0	V
Collector Current - Continuous	$I_C$	500	mA
Collector Current - peak collector current	$I_{CM}$	1.0	A
Collector Power Dissipation	$P_C$	250	mW
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	


**/ Electrical Characteristics(Ta=25 )**

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	$V_{CBO}$	$I_C=10\mu A$ $I_E=0$	50			V
Collector to Emitter Breakdown Voltage	$V_{CEO}$	$I_C=10mA$ $I_B=0$	45			V
Emitter to Base Breakdown Voltage	$V_{EBO}$	$I_E=10 A$ $I_C=0$	5.0			V
Collector Cut-Off Current	$I_{CBO}$	$V_{CB}=20V$ $I_E=0$			0.1	A
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB}=5.0V$ $I_E=0$			0.1	A
DC Current Gain	$h_{FE(1)}$	$V_{CE}=1.0V$ $I_C=100mA$	100		600	
	$h_{FE(2)}$	$V_{CE}=1.0V$ $I_C=500mA$	40			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500mA$ $I_B=50mA$			0.7	V
Base to Emitter Voltage	$V_{BE}$	$V_{CE}=1.0V$ $I_C=500mA$			1.2	V
Transition Frequency	$f_T$	$V_{CE}=5.0V$ $I_C=10mA$	100			MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V$ $f=1.0MHz$ $I_E=0$		5.0		pF

/ Electrical Characteristic Curve

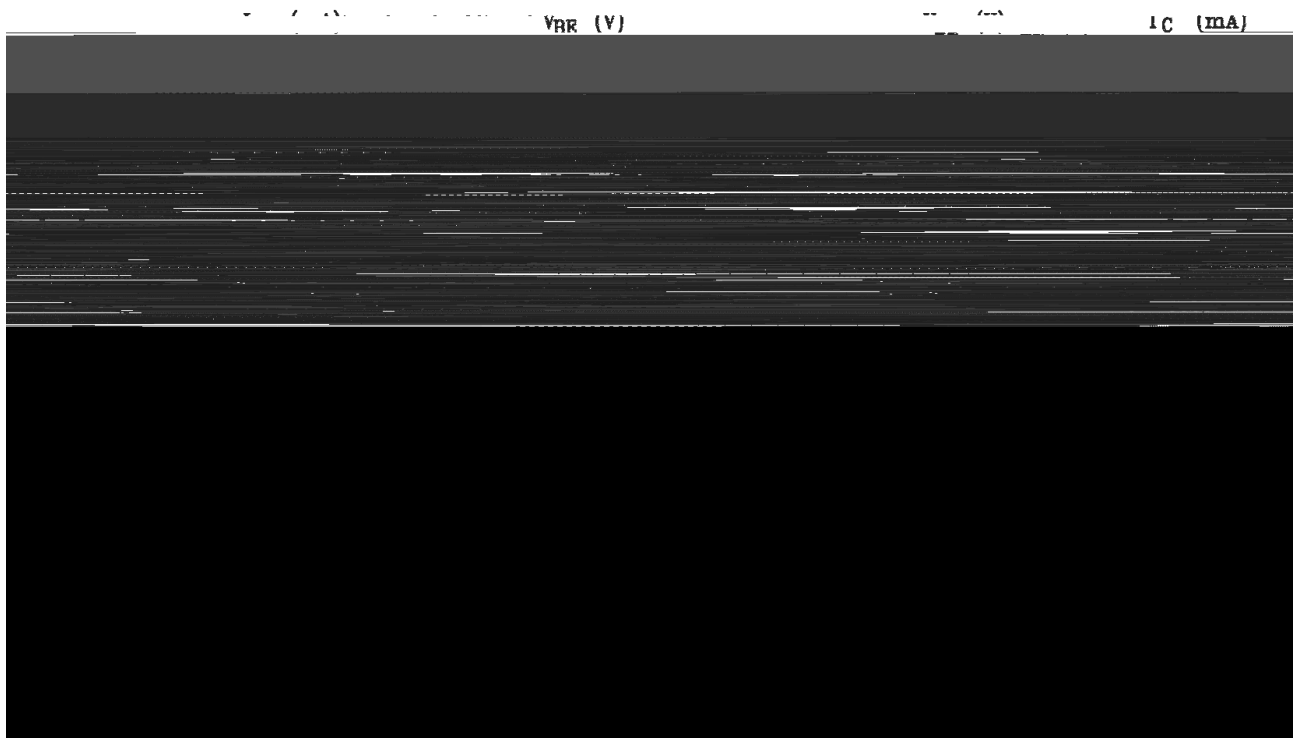


/ Package Dimensions

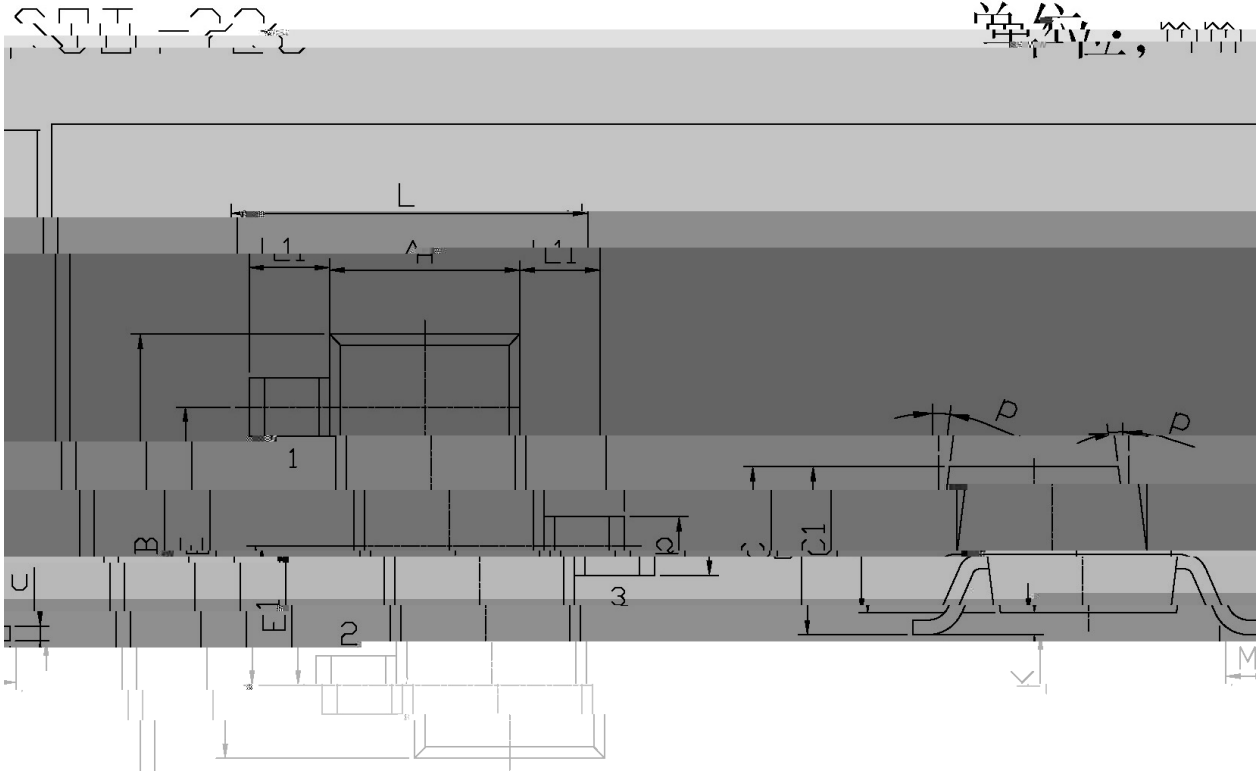

Dimensions	Dimensions in Millimeter		Dimensions in Millimeter			
	Symbol	Min	Max	Symbol	Min	Max
L	L	2.2	2.7	C	1.30	Max
L1	L1	0.45	0.65	C1	0.90	1

/ Marking Instructions

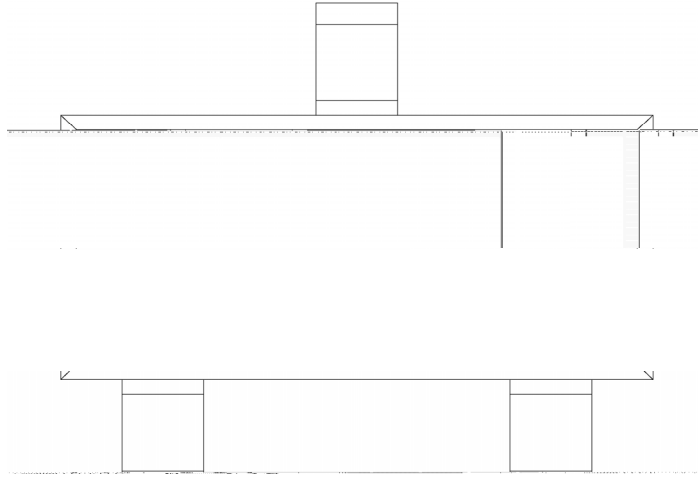

H

6A

Note:

H: Company Code

