

/ Descriptions

SOT-323 PNP Silicon PNP transistor in a SOT-323 Plastic Package.


/ Features

BC847W
High current, low voltage complementary pair with BC847W,HF Product.


/ Applications

General purpose switching and amplification.

/ Equivalent Circuit



/ Pinning

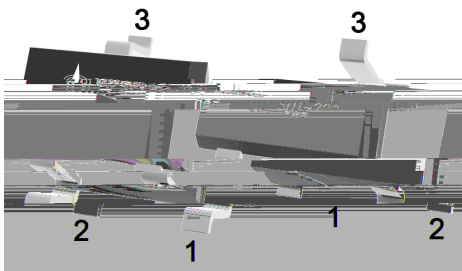



PIN1 Base PIN 2 Emitter PIN 3 Collector

/ h_{FE} Classifications & Marking

h _{FE} Classifications Symbol	A	B	C
h _{FE} Range	125 250	220 475	420 800
Marking	H3E	H3F	H3G

/ Electrical Characteristic Curve

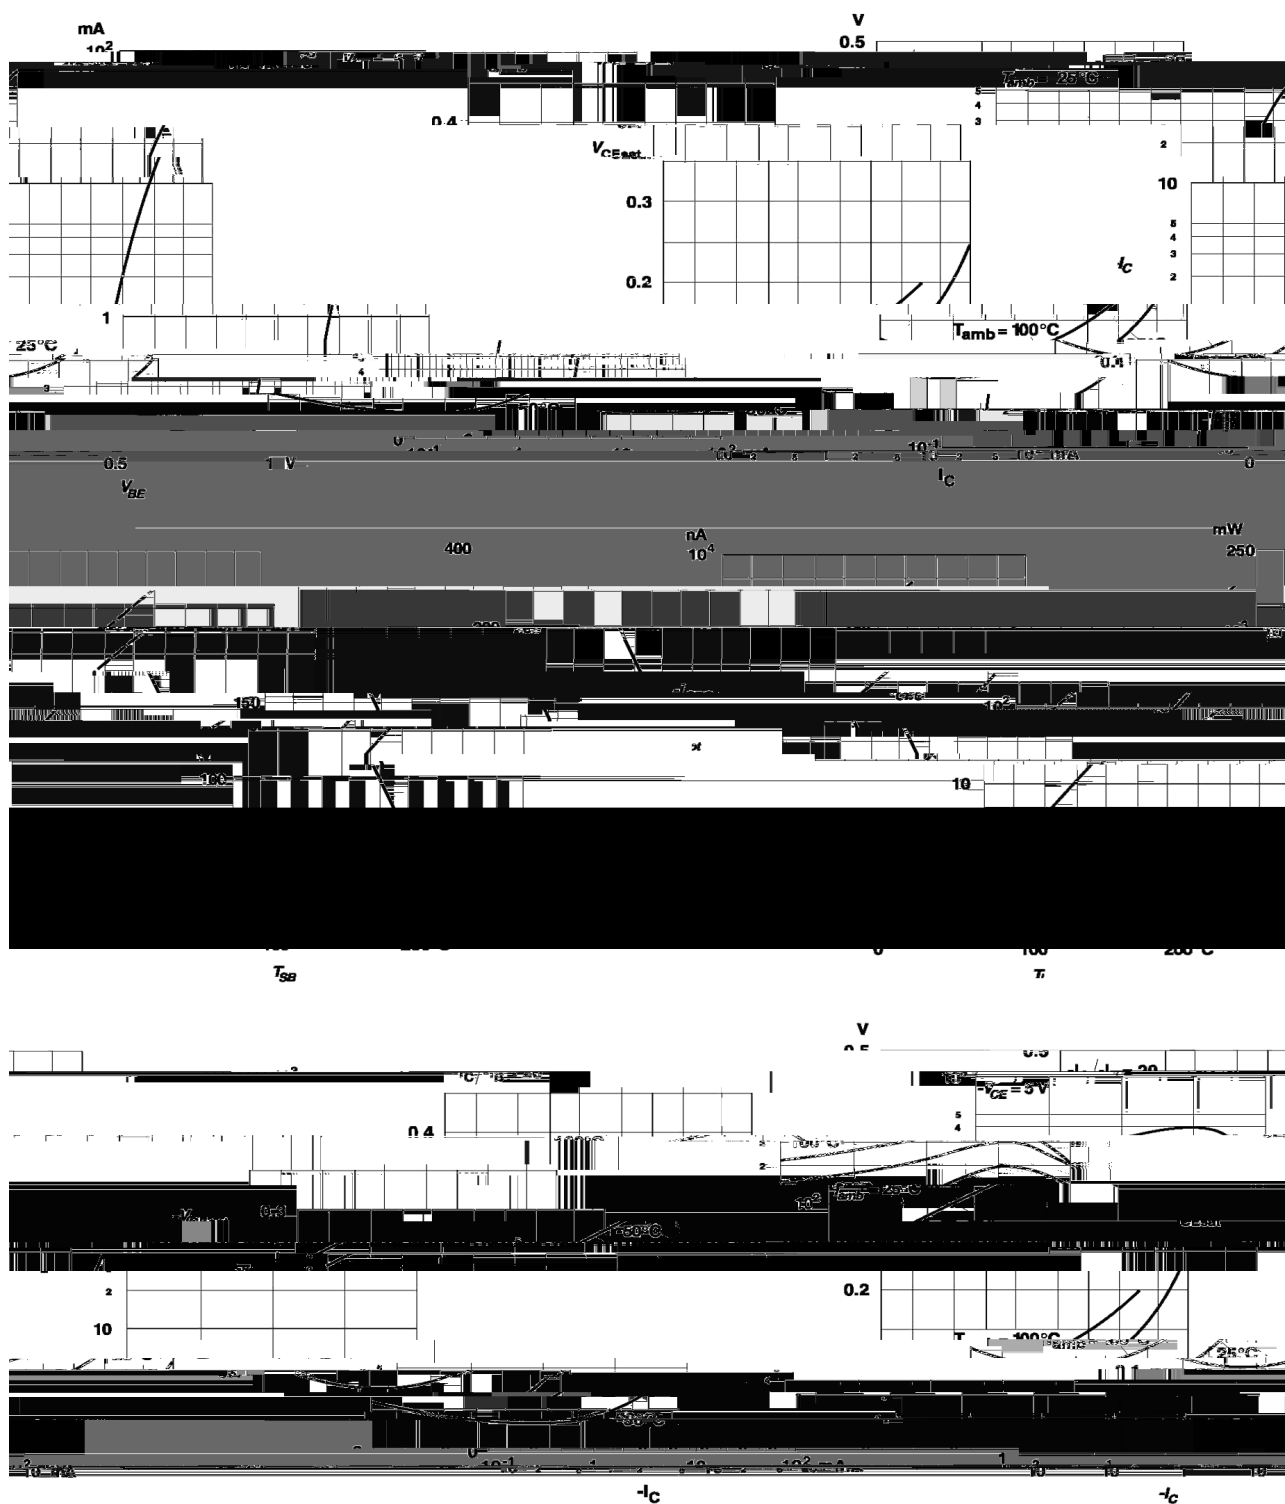

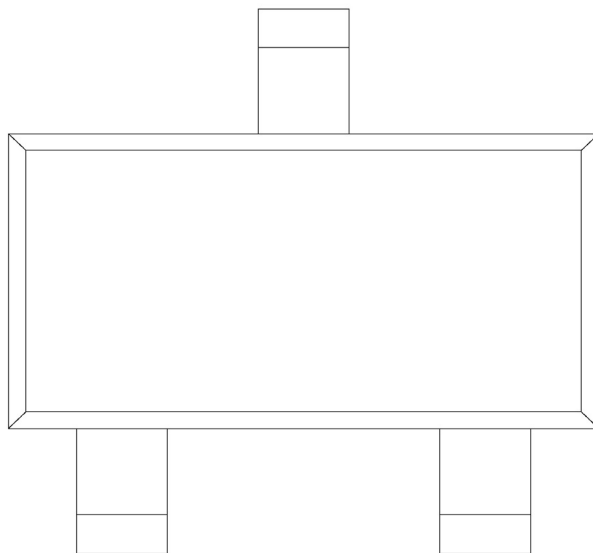

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices