

# BRBAV23AQ/CQ/SQ

Rev.A Dec.-2022

# BRBAV23AQ/CQ/SQ

Rev.A Dec.-2022



DATA SHEET

Parameter	Symbol	Rating	Unit
Repetitive Reverse Voltage	$V_{RRM}$	250	V
Reverse Voltage	$V_R$	200	V
Working Peak Reverse Voltage	$V_{RWM}$		
RMS Reverse Voltage	$V_{R2003} (V) ] T J E T 5 5 . 4 6$		

Symbol S3.6(p)-60.4( )TJ/TT9 1 Tf2

Symbol


Parameter

	$rV u ] \mu$		


T =e 01514.9( )766( f )14MHz

V


/ Electrical Characteristic Curve

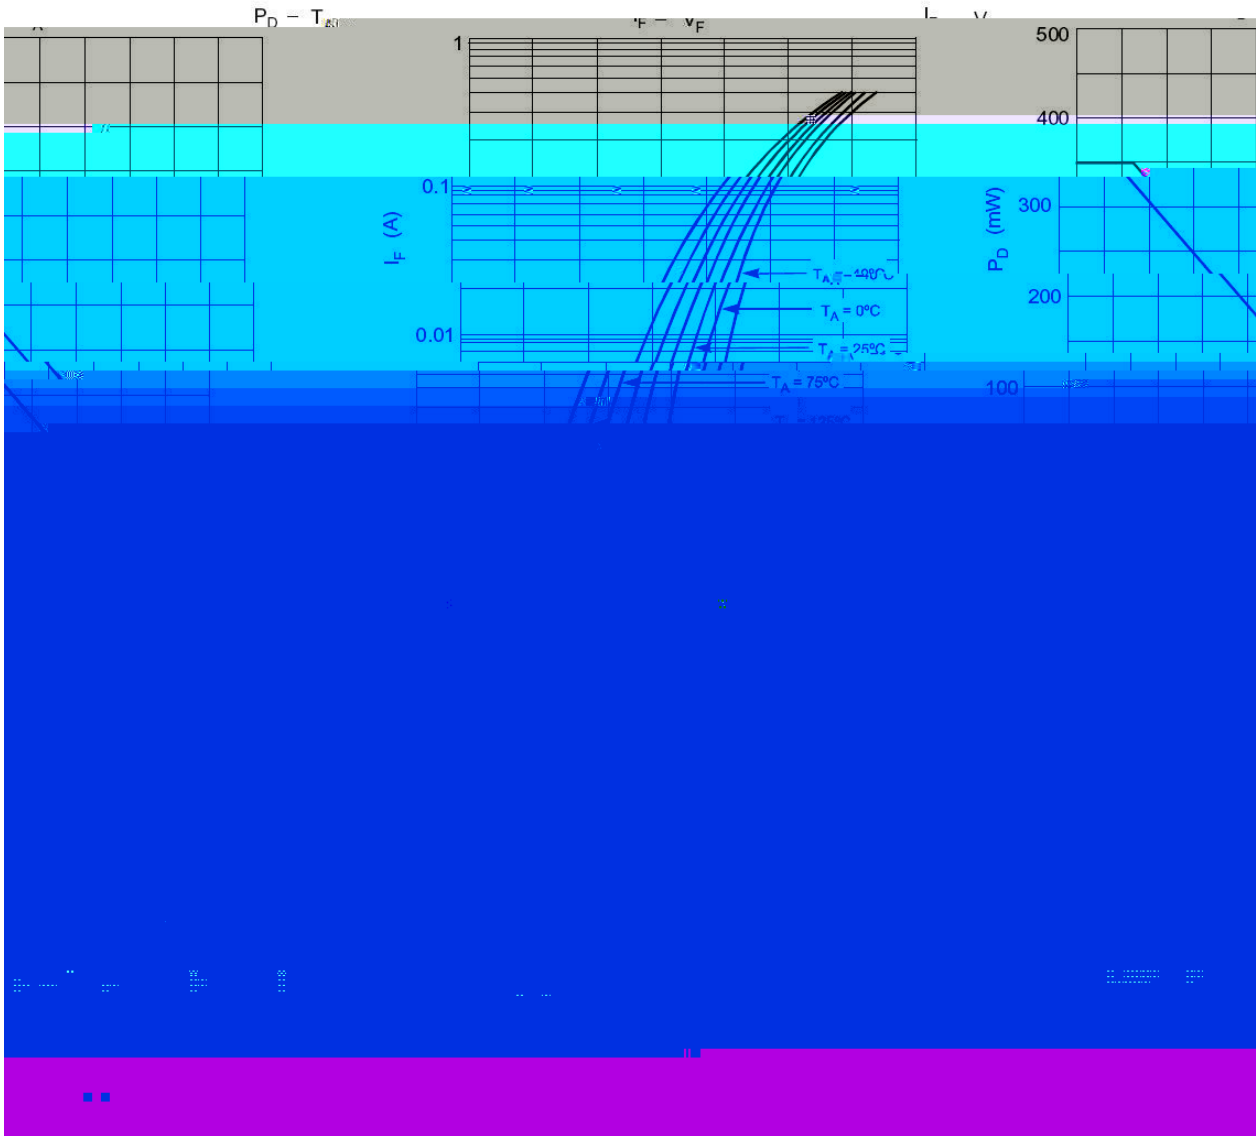

/ Package Dimensions

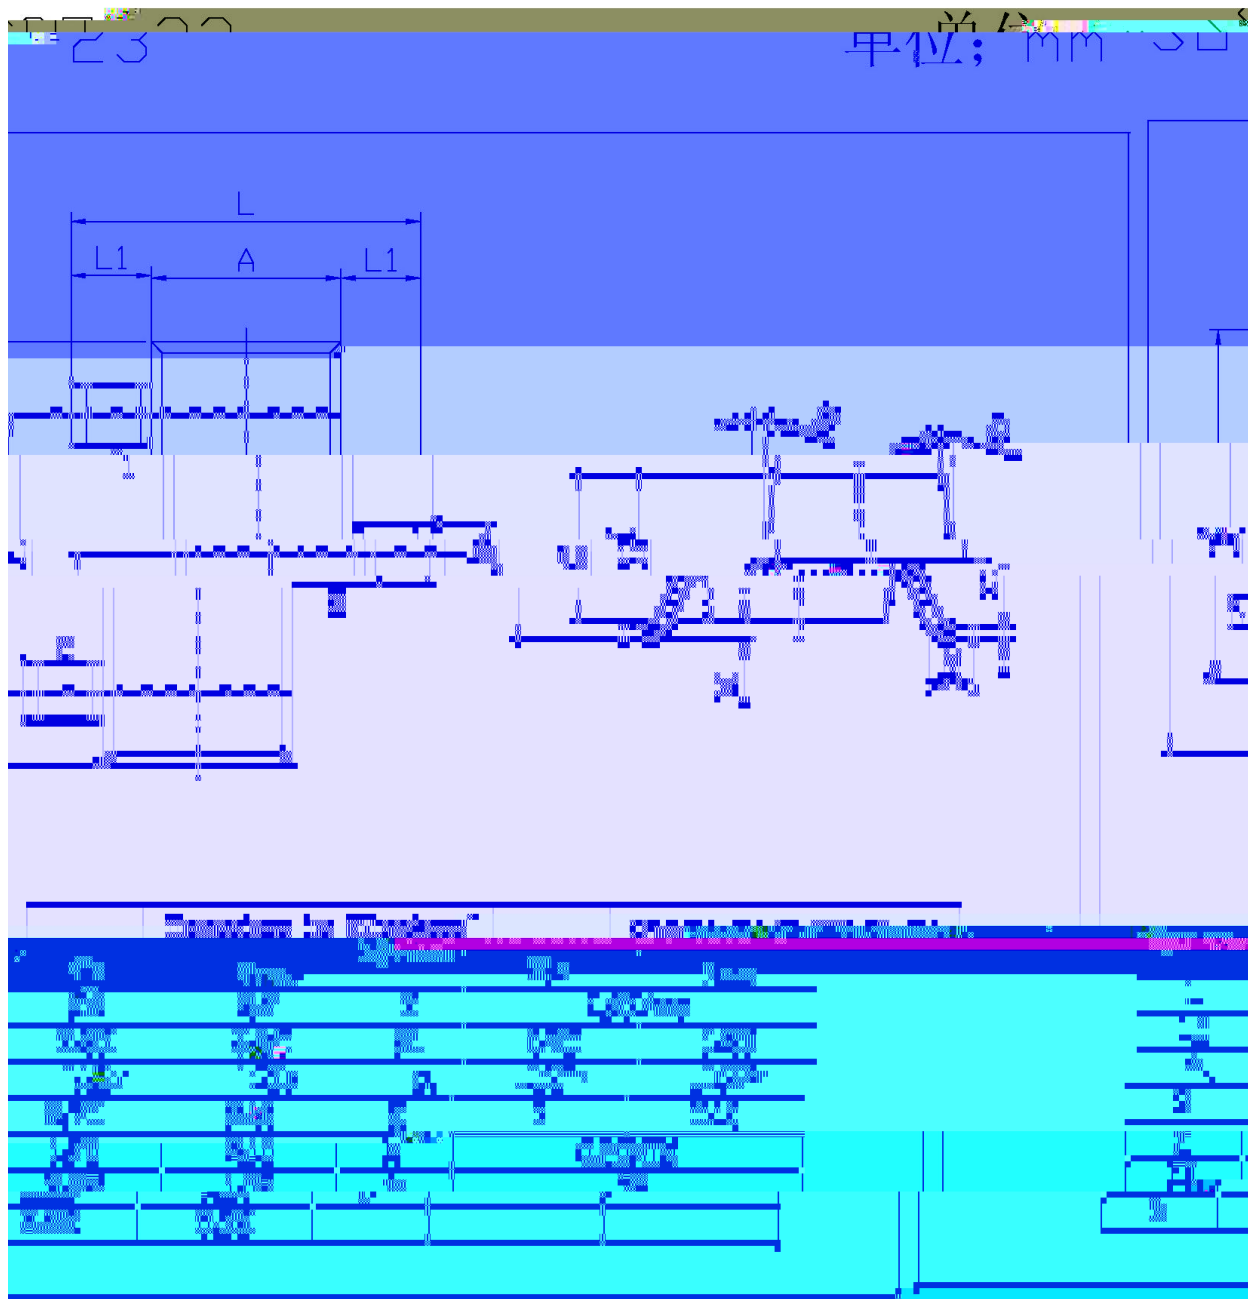

**/ Marking Instructions**

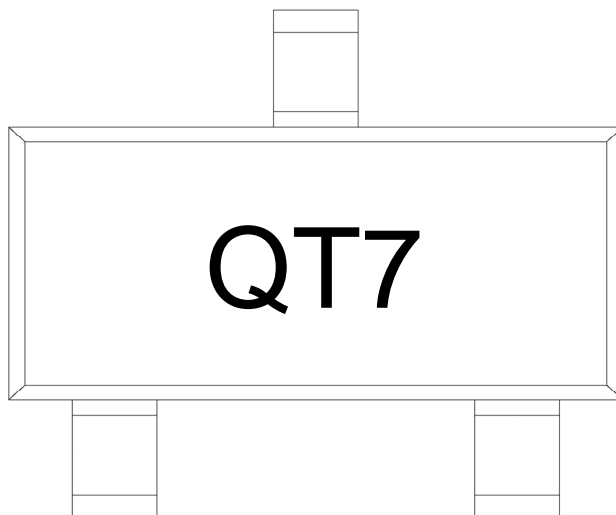

Note:

Q: Automobile halogen-free product Code

T7: Product Type

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)


Note:

- 1            150 200            60 120sec;    1.Preheating:150~200 , Time:60~120sec.
- 2            255 5                    5 0.5sec;    2.Peak Temp.:255 5 , Duration:5 0.5sec.
- 3                            2 10 /sec.            3.Cooling Speed: 2~10 /sec.