

/ Descriptions


/ Features

±


/ Applications

GPS

/ Application Circuit

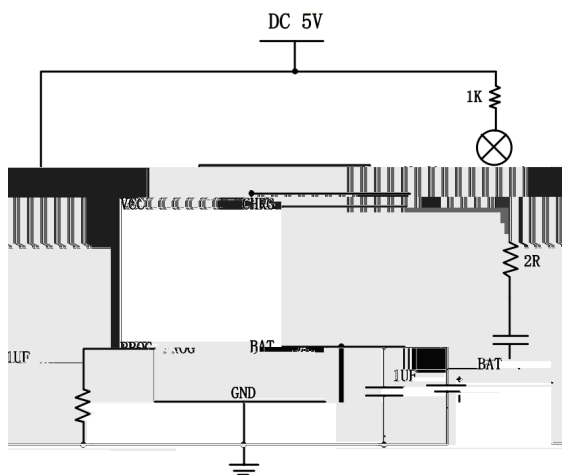

/ Pinning

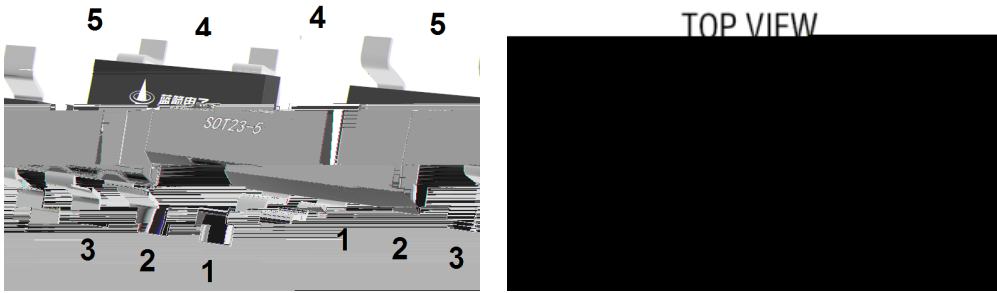

PIN Num.	Symbol	Function
	PROG	

/ Absolute Maximum Ratings(Ta=25)

PARAMETER	SYMBOL	RATINGS	UNITS
	R _{JA}		


/ Electrical Characteristics(Ta=25)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
						μ
						μ

μ

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
						mS
						mS
						μ

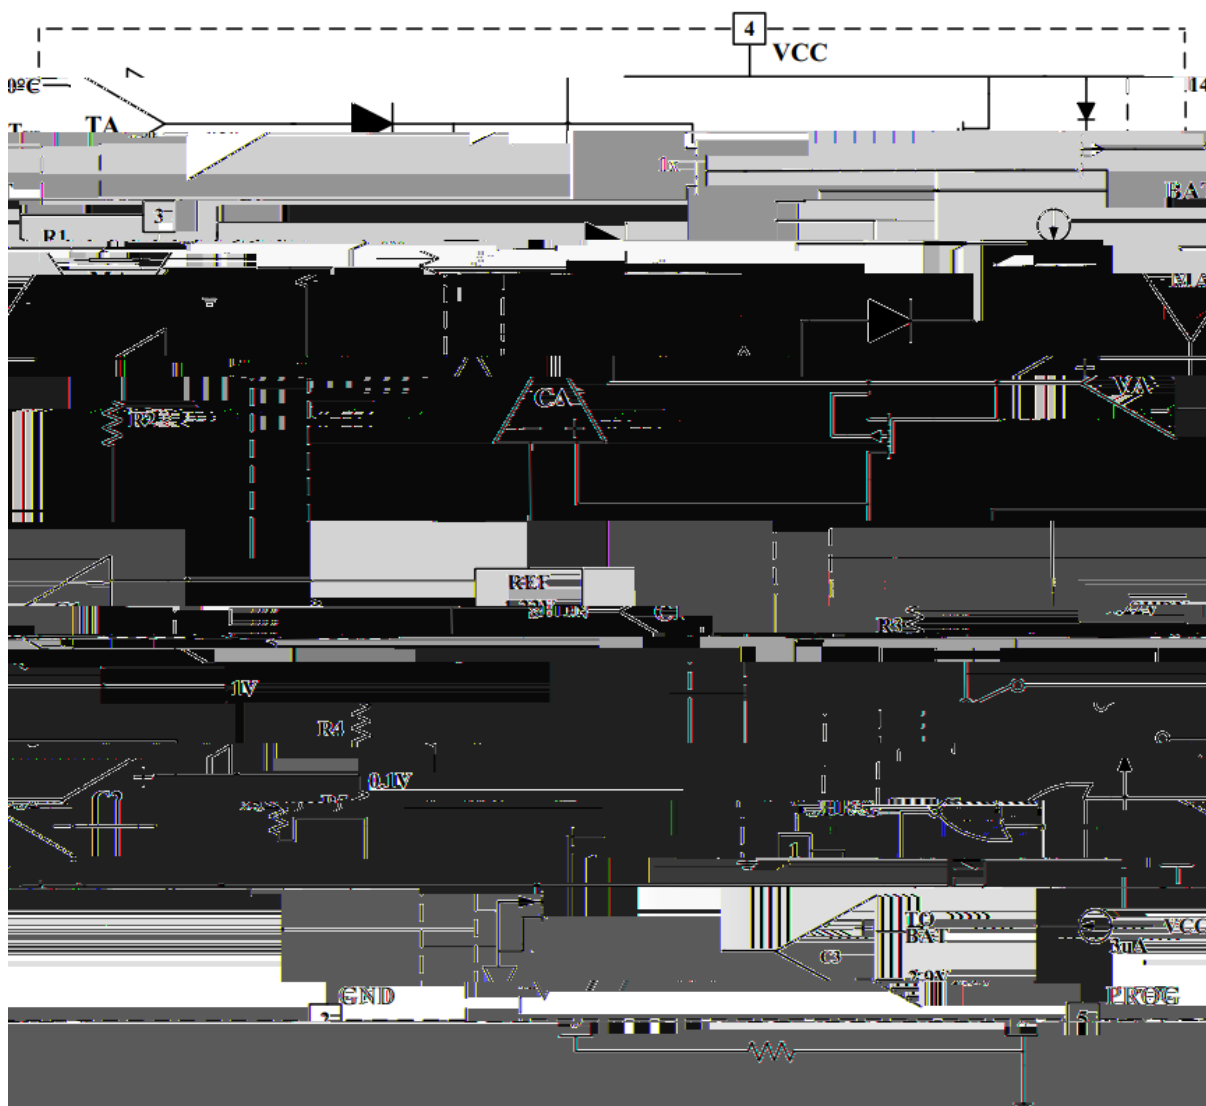

BRCL4058MME-4.2

/ Function description

140


BRCL4058MME-4.2

BRCL4058MME-4.2

μ


μ

/ Marking Instructions

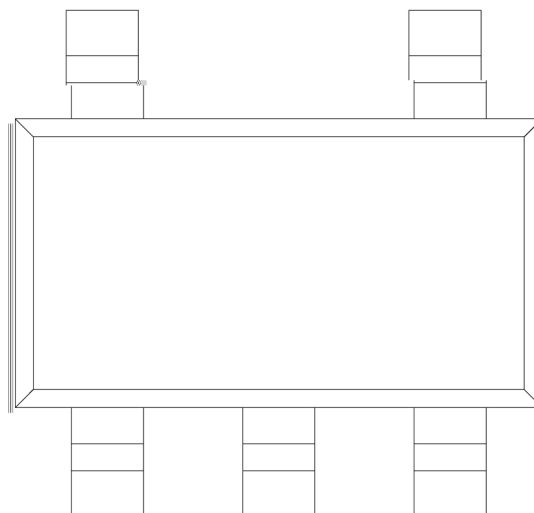

4058M

() / K\d g\iXk i\`Gif]`d`]fi`@`I`]\fn`Jfd` \i`e`^ZGYS=i\`z

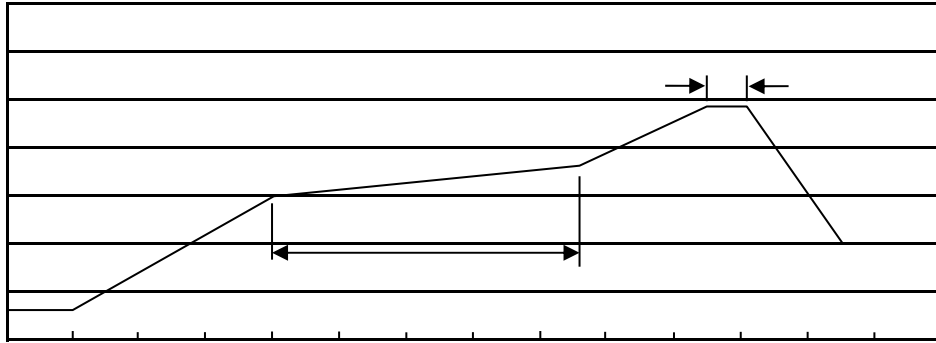

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/			

/ Notices