





PDFN5×6 N  
N-Channel MOSFET in a PDFN5×6 Plastic Package .

Low  $R_{DS(ON)}$  to minimize conductive loss;low Gate Charge for fast switching;Low Thermal resistance;HF Product.


N





	Parameter	Symbol	Rating	Unit
Drain-SouD				





Parameter	Symbol	Test Conditions	Min	Max	Unit
Turn-On Delay Time	$t_{d(on)}$				
Turn-On Rise Time	$t_r$	$V_{GS}=10V$ $R_{DS(on)}$			ns



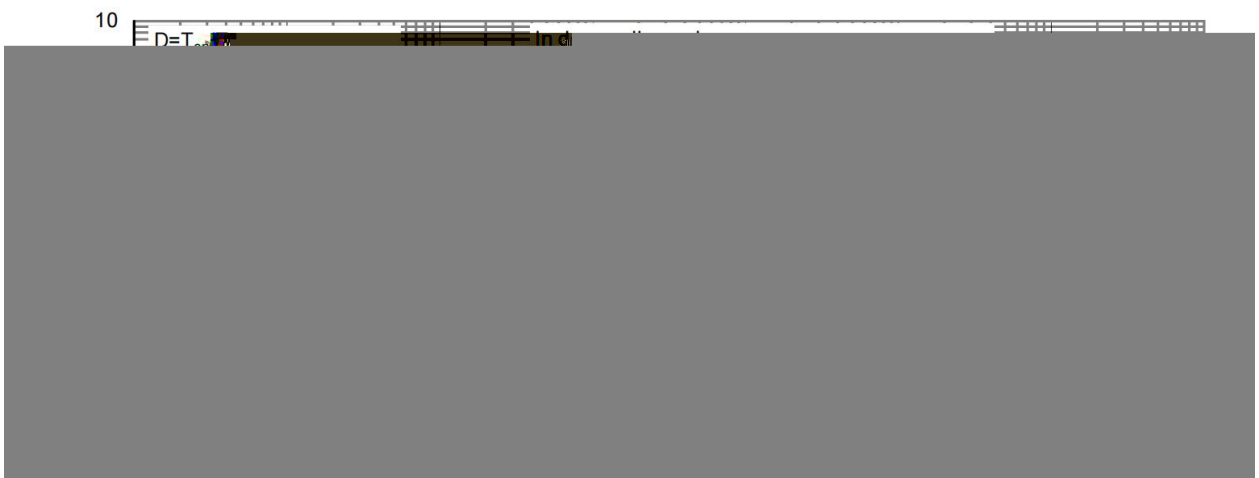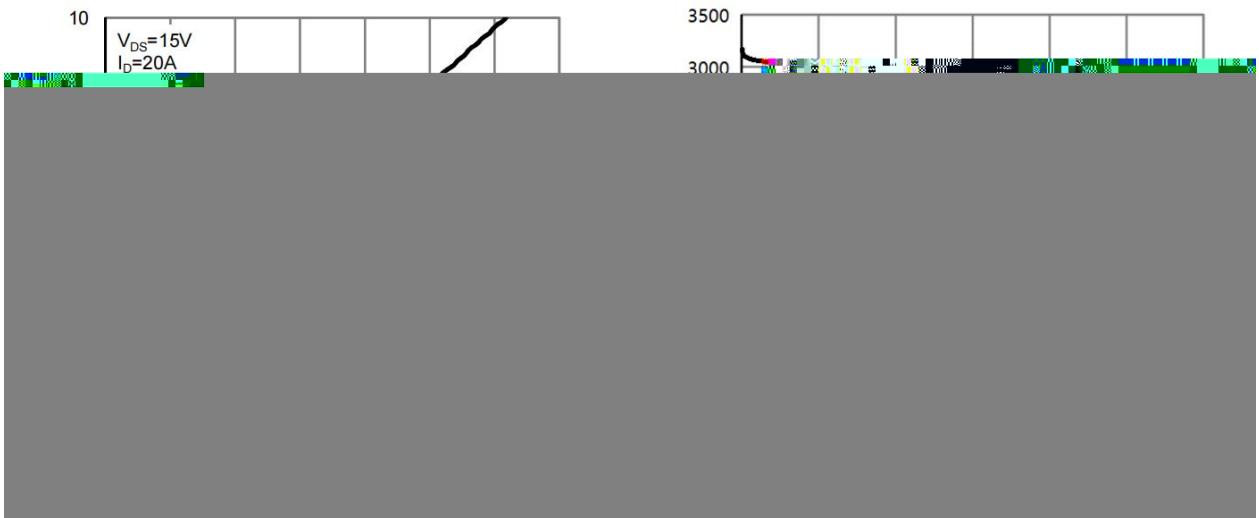



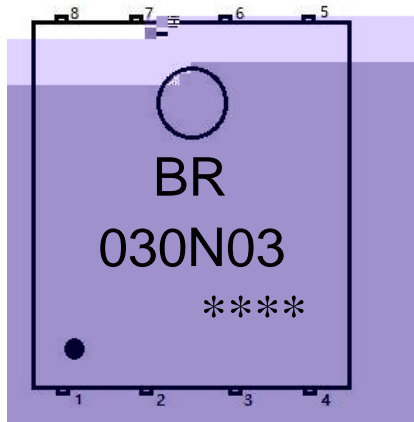

BR

030N03

\*\*\*\*

Note

BR

Company Code

030N03

Product Type

\*\*\*\*;

Lot No. Code, code change with Lot No

