

BRCS060N04ZC

Rev.B Mar.-2025

/ Descriptions

PDFN5×6 N

N-Channel MOSFET in a PDFN5x6 Plastic Package.

/ Features

$V_{DS}(V)=40V$ $I_D=60A$

$R_{DS(ON)}@10Vm6m\hat{o}$ (Typ. 5.6m)

$R_{DS(ON)}@4.5Vm9m$ (Typ.7.8m)

HF Product.

/ Applications


MB/NB/UMPC/VGA

Buck


-

Battery Management,High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA,Networking DC-DC Power System,Load Switch.

/ Equivalent Circuit



/ Pinning

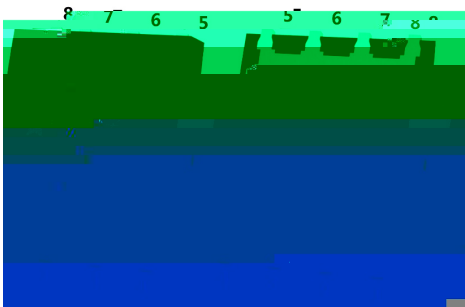

PIN1 2 3 S PIN4 G PIN5 6 7 8 D

/ Marking

BRCS060N04ZC

Rev.B Mar.-2025

DATA SHEET

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=20V$ $I_D=20A$ $R_{GEN}=3.3$		11		ns
Turn-On Rise Time	t_r			69		
Turn-Off Delay Time	$t_{d(off)}$			39		
Turn-Off Fall Time	t_f			9.3		

Ô ? d • Ž ¢ / Electrical Characteristic Curve

BRCS060N04ZC

Ø □ =) ϕ / Package Dimensions

, M y f / Marking Instructions

^a ϕ y
(8 y , [W A
060N04 y ° Z W A

