
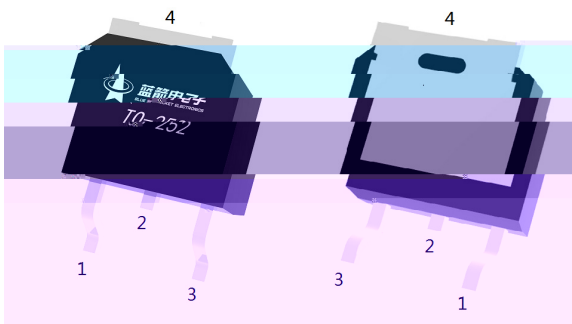


N

w




HF Product.

DC/DC







--	--	--	--	--	--	--

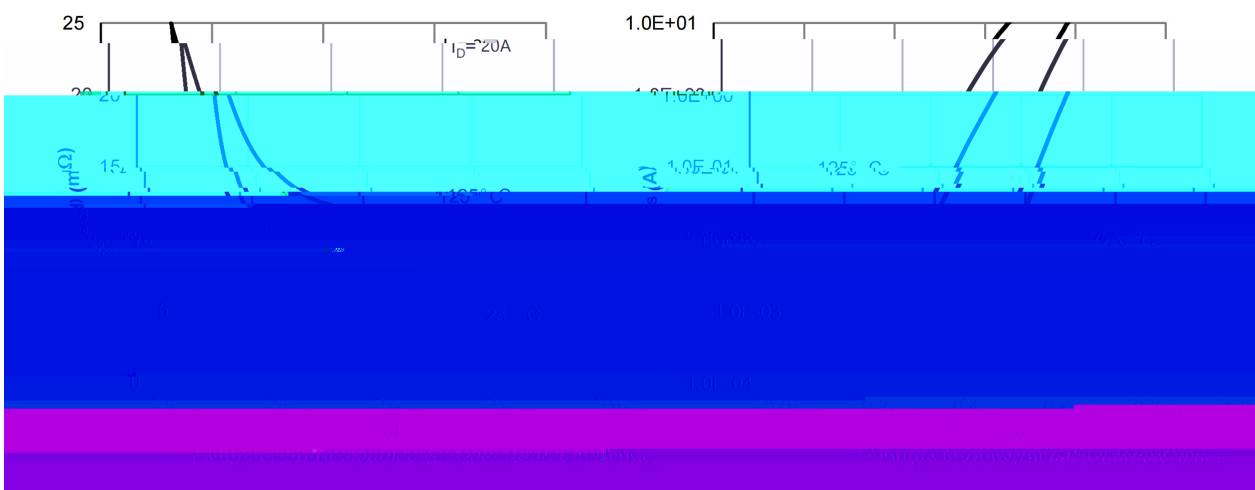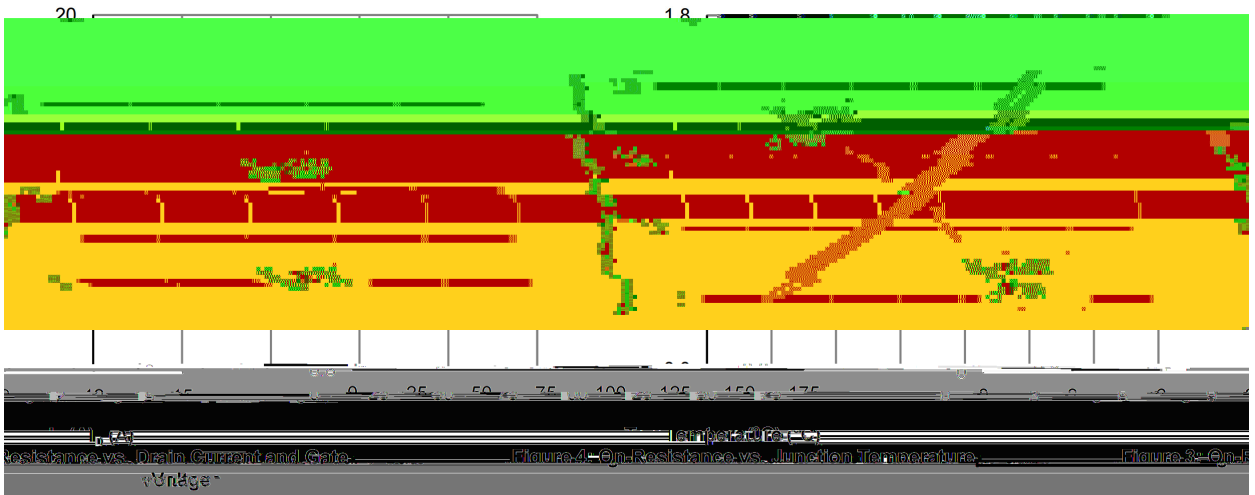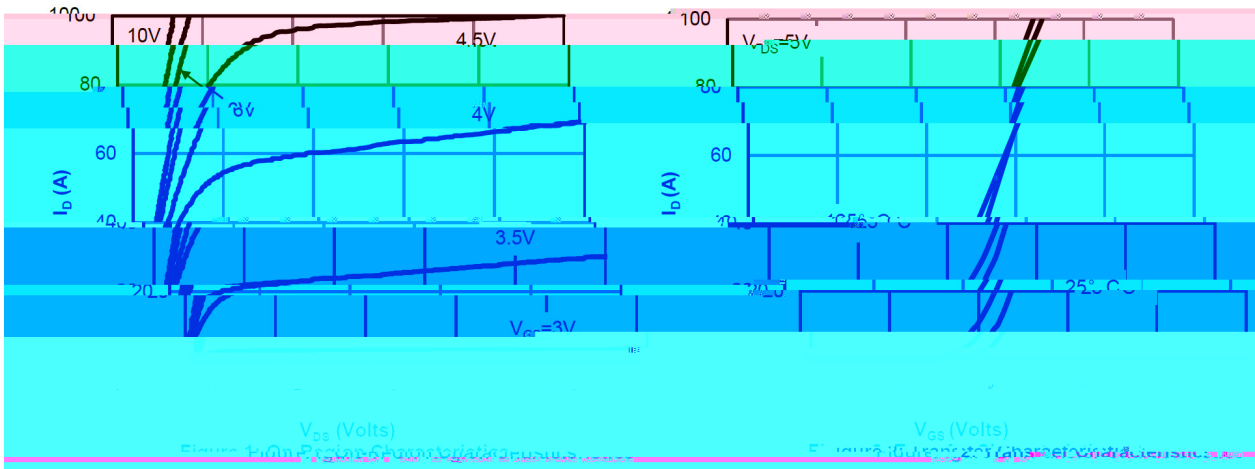


/

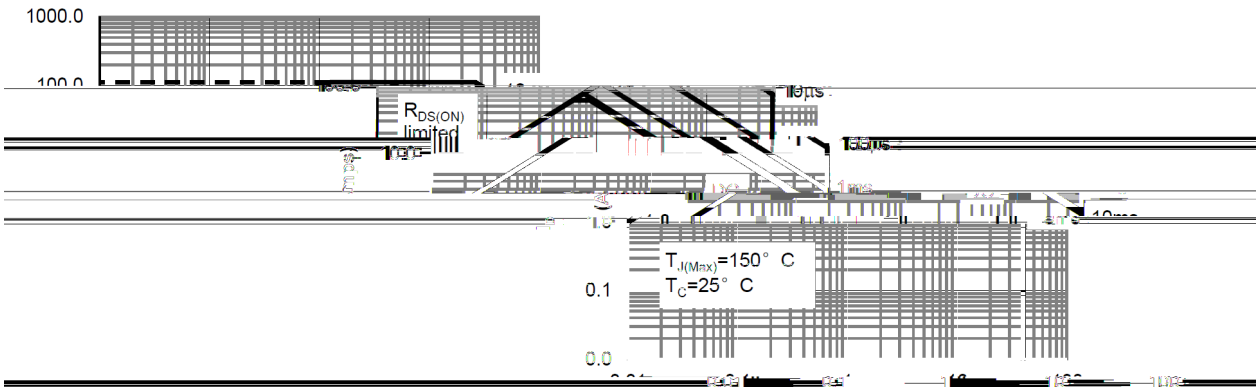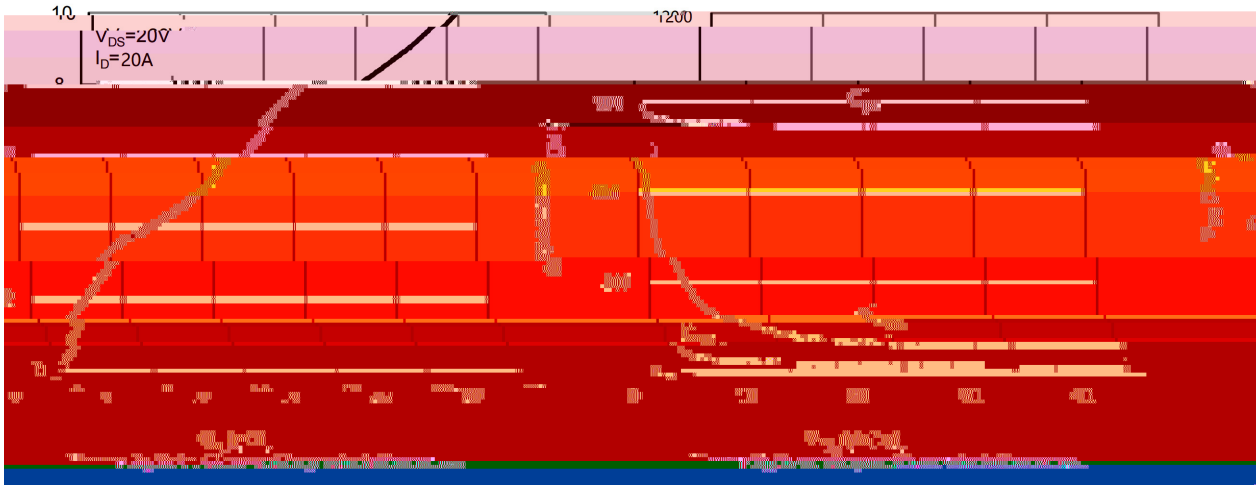


$V_{DS}$  (Volts)

$V_{DS}$  is equal to 1.5V

Figure 9: Maximum Forward Biased Safe Operating Area

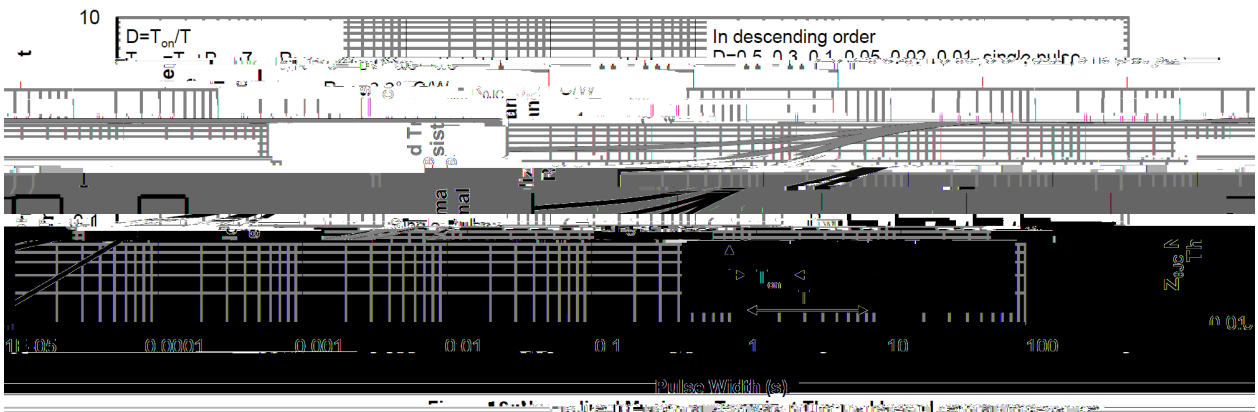


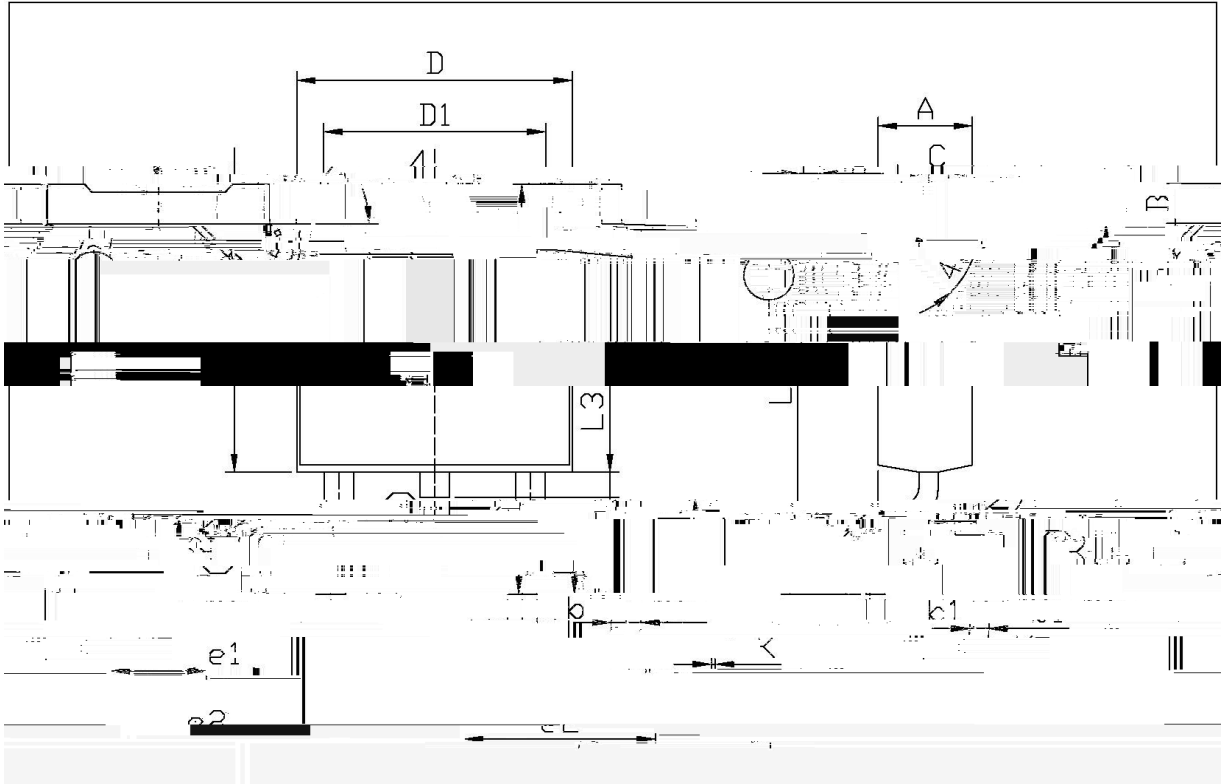

单位: mm

Dimensions		In Millimeters		Symbol		Dimensions		In Millimeters		Symbol	
Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
0.95	1.25	e1	2.24	2-34	B	0.70	0.90	0.85	0.95	0.70	0.90
0.55	0.75	0.55	0.75	1.50	0.60	0.75	1.00	0.60	0.75	0.60	0.75
0.10	0.10	D1	5.10	5.50	K	0.00	0.00	0.00	0.00	0.00	0.00

T0-252

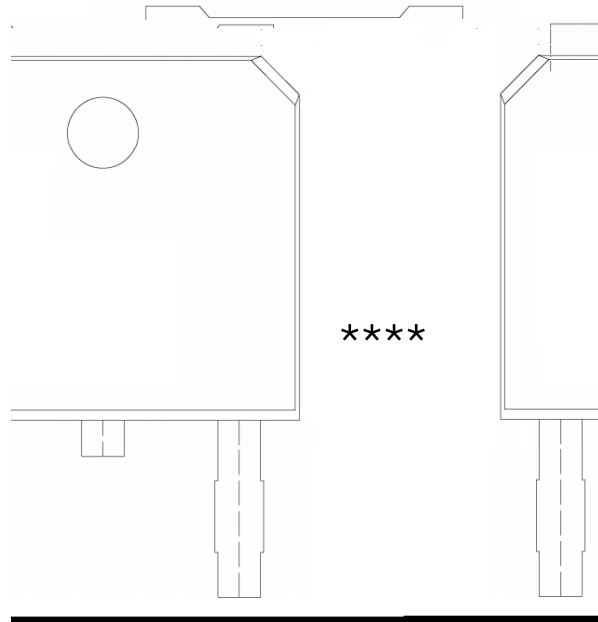

BR

080N 04S

\*\*\*\*

## Temperature Profile for IR Reflow Soldering(Pb-Free)

---

---