

RCS2302AMA

Rev.B Mar.-2020

--	--

, - . / 0 1 + 2 3 4 5 6 7 8 9

\* + & ' : ; < = > ? @ A B C + D @ E

F G H I J K



**/ Descriptions**

N- CHANNEL MOSFET in a SOT-23 Plastic Package.


**/ Features**

Super high dense cell design for low  $R_{DS(ON)}$ , SOT-23 package.


**/ Applications**

Battery management, High speed switch, low power DC to DC converter.

**/ Equivalent Circuit**



**/ Pinning**



PIN1{ G      PIN 2{ S      PIN 3{ D

**/ Marking**

Marking	A2H
---------	-----






**/ Absolute B**

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DSS}$	20	V
Gate-Source Voltage	$V_{GSS}$	$\pm 10$	V
Drain Current – Continuous	$I_D$	3.0	A
Pulsed Drain Current	$I_{DM}$	10	A
Continuous Source Current	$I_S$	0.95	A
Power Dissipation	$P_D$	0.9	W
Storage Temperature Range	$T_{stg}$	-55~150	$^{\circ}C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0$ $I_D=10\mu A$	20	21		V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{GS}=0$ $V_{DS}=20V$			1.0	$\mu A$
Gate-Body Leakage.	$I_{GSS}$	$V_{GS}=\pm 10V$ $V_{DS}=0V$			$\pm 100$	nA
Static Drain-Source On-Resistance	$R_{DS(on)1}$	$V_{GS}=4.5V$ $I_D=3.6A$		46	55	m
	$R_{DS(on)2}$	$V_{GS}=2.5V$ $I_D=3.1A$		59	75	m
Forward Transconductance	$g_{FS}$	$V_{DS}=5V$ $I_D=3.6A$		6		S
Drain-Source Diode Forward Voltage	$V_{SD}$	$V_{GS}=0V$ $I_D=1.25A$			1.2	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=50\mu A$	0.50		1.0	V
Turn-On Delay Time	$t_{d(on)}$	$V_{DD}=10V$ $V_{GEN}=4.5V$ $R_{GEN}=6$ $R_L=2.8$		7		ns
Turn-On Rise Time	$t_r$			55		
Turn-Off Delay Time	$t_{d(off)}$			15		
Turn-Off Fall Time	$t_f$			10		





**/ Electrical Characteristic Curve**

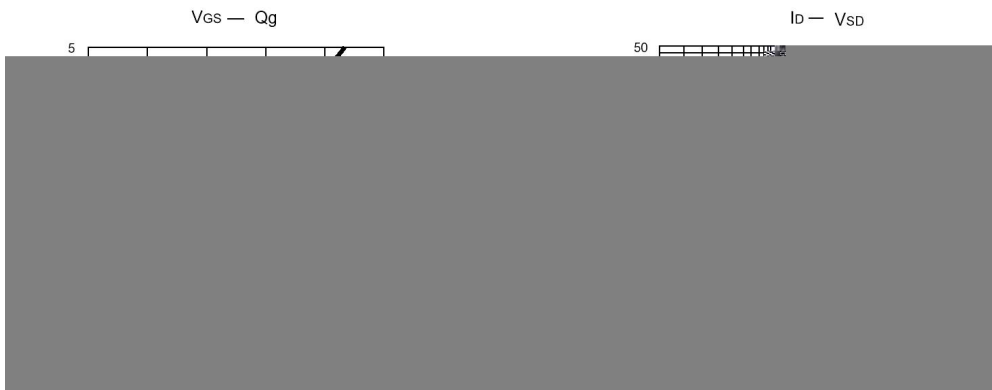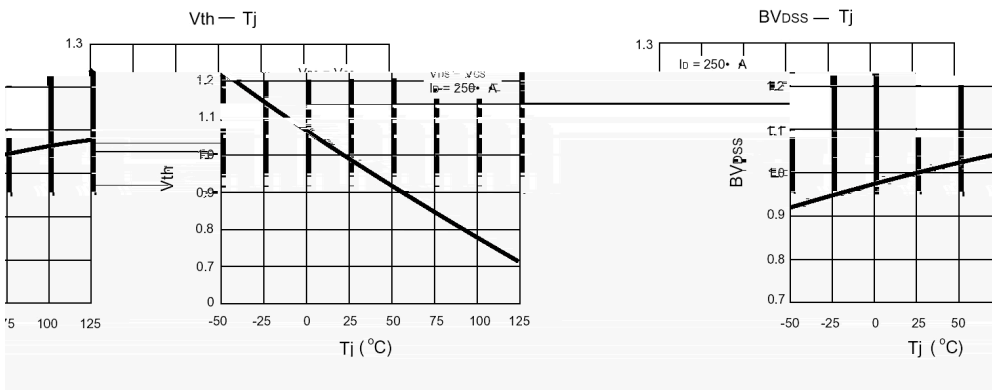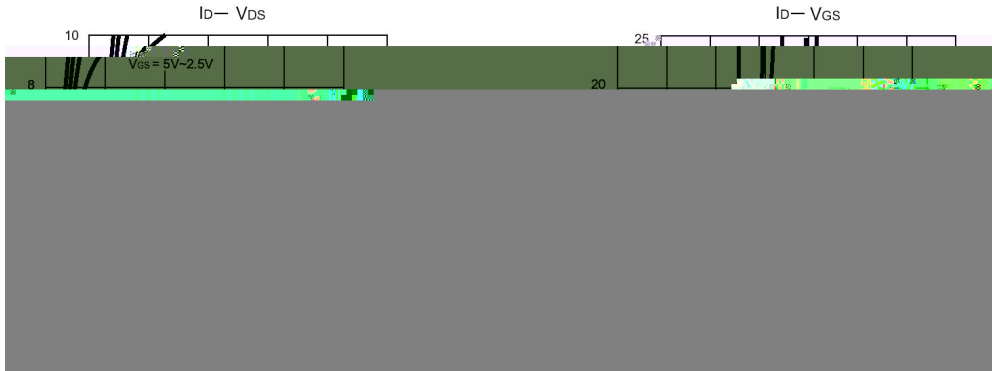



**/ Package Dimensions**

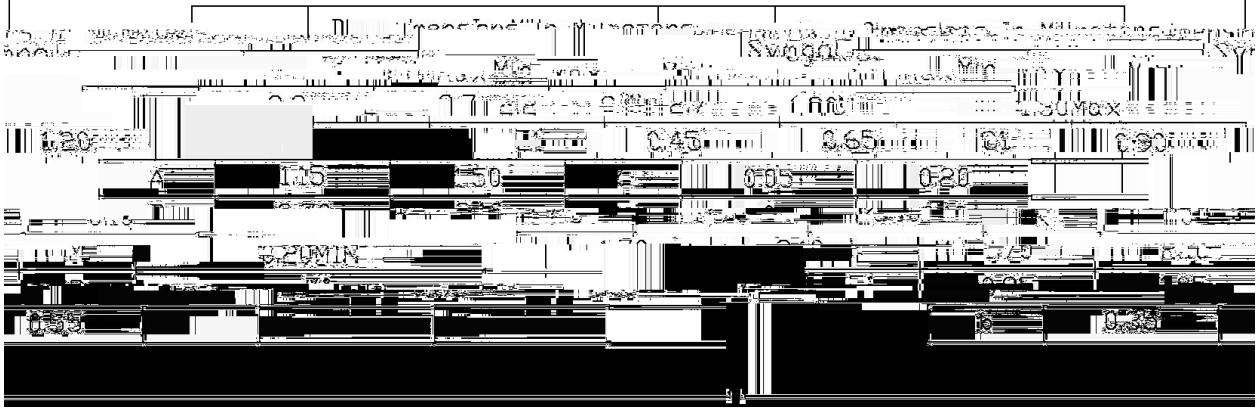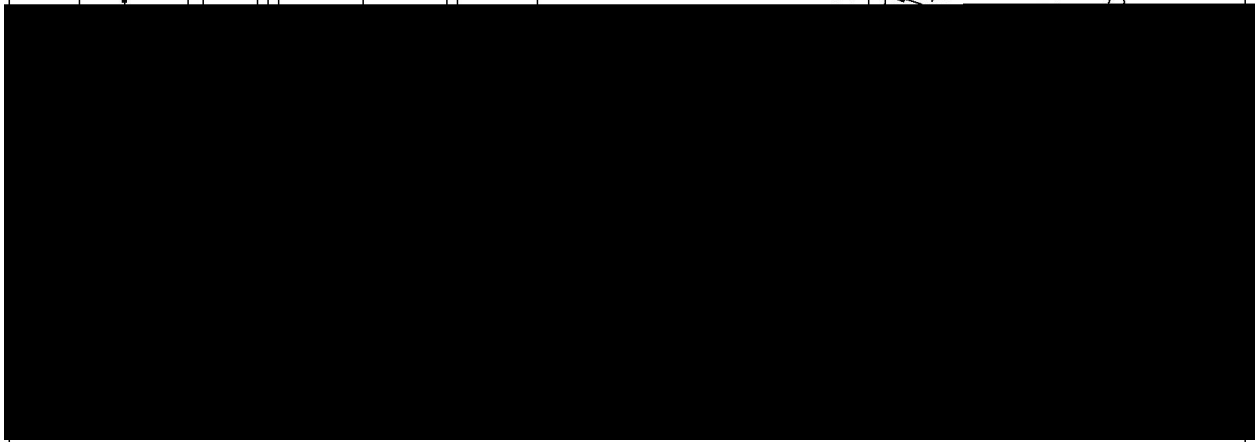


**BRCS2302AMA**

Rev.B Mar.-2020



( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

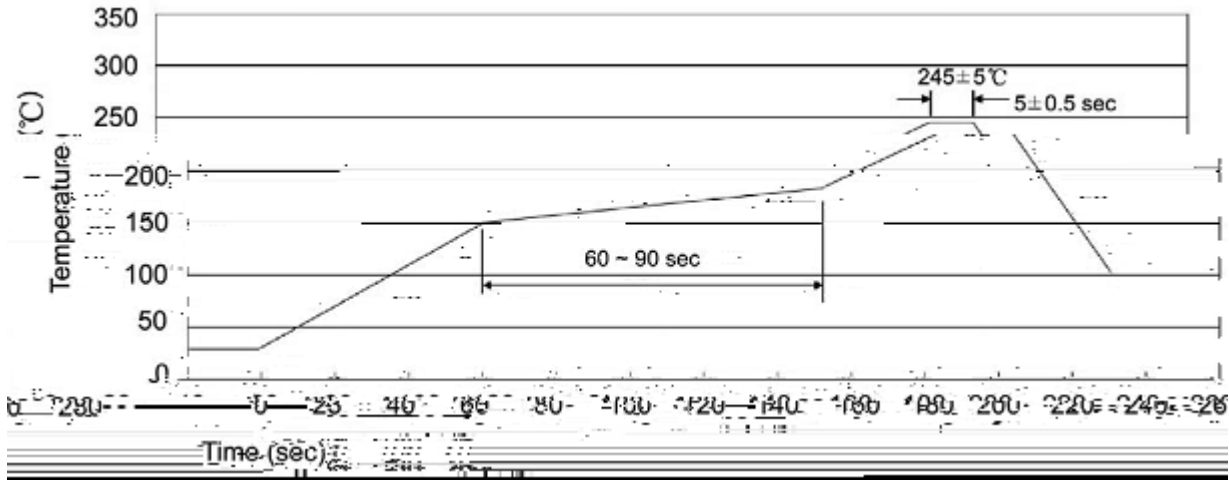

Note:

- |   |     |     |    |          |   |
|---|-----|-----|----|----------|---|
| 1 | 25  | 150 | 60 | 90sec;   | 1.Preheating:25~150 , Time:60~90sec.    |
| 2 | 245 | 5   | 5  | 0.5sec;  | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 |     |     | 2  | 10 /sec. | 3. Cooling Speed                        |