




## / Descriptions

修 修

## / Features

DC/DC






## / Marking



--	--	--	--





/ Electrical Characteristic Curve

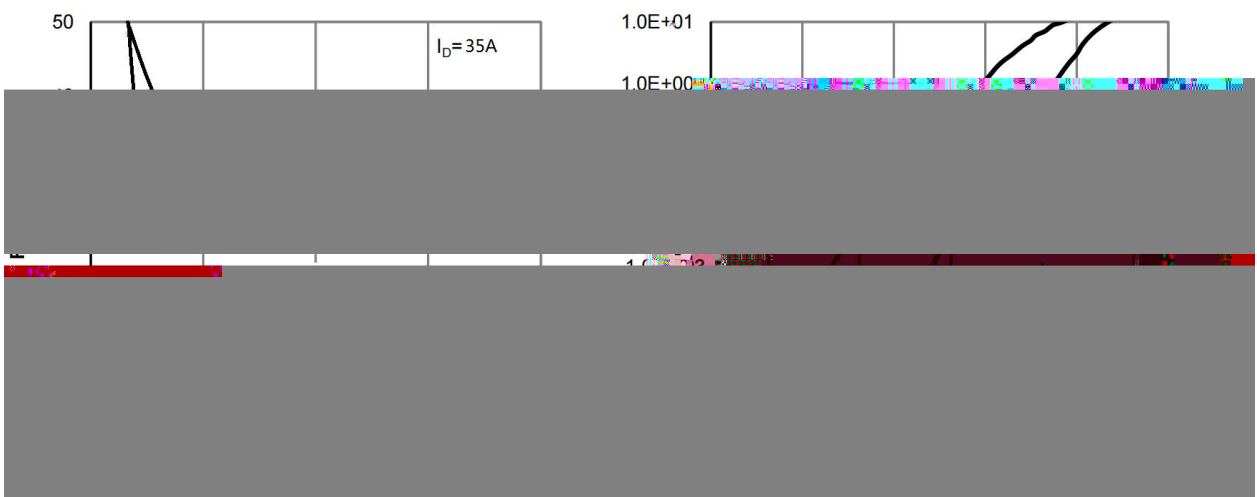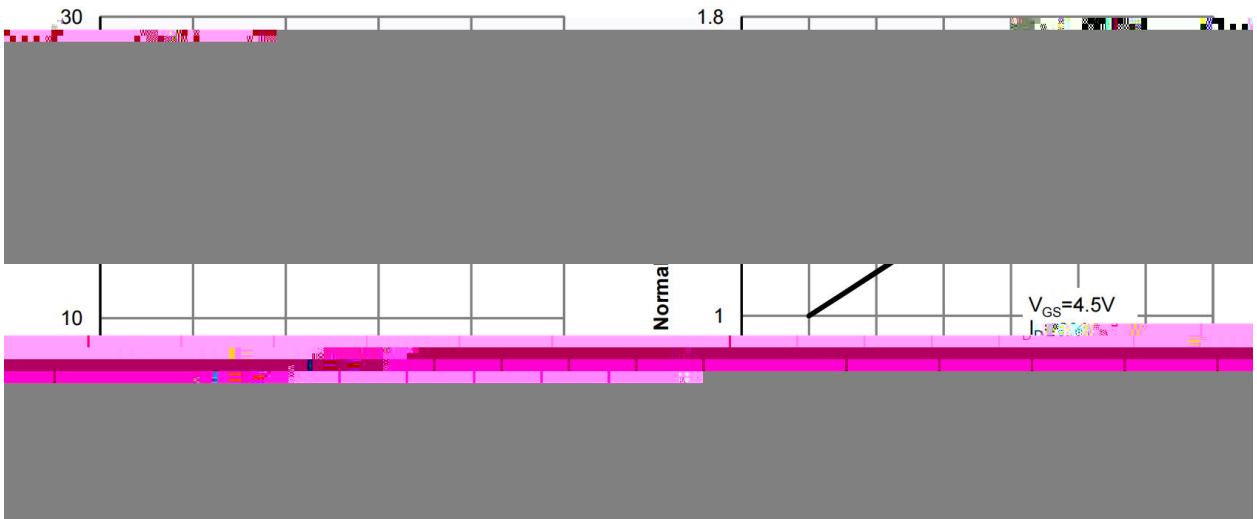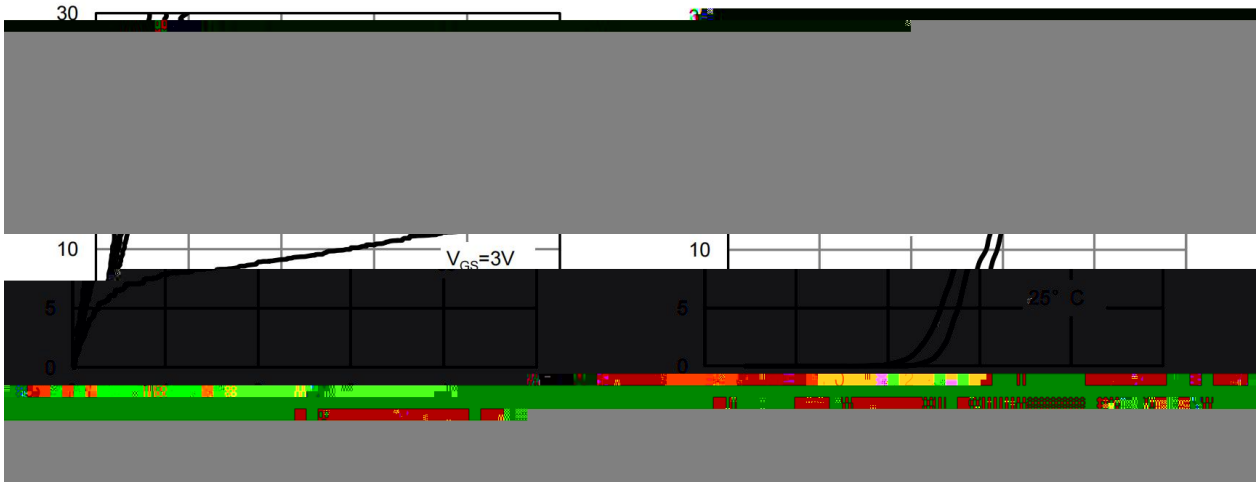




/ Electrical Characteristic Curve

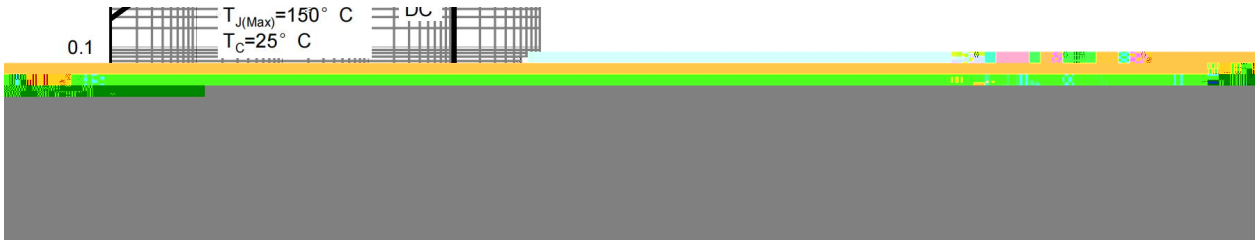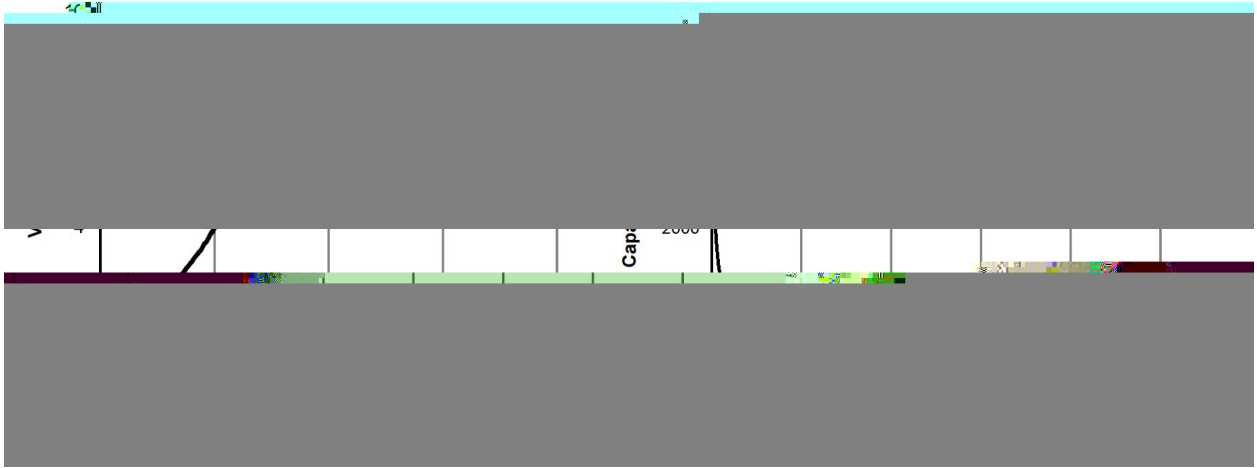





/ Marking Instructions

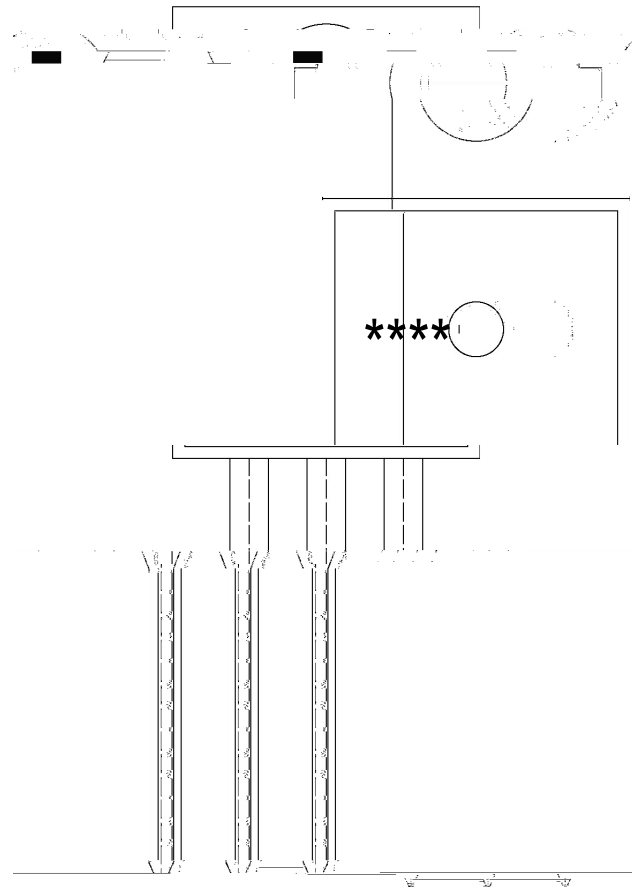

BR  
3710L  
\*\*\*\*

( ) / Temperature Profile for Dip Soldering(Pb-Free)

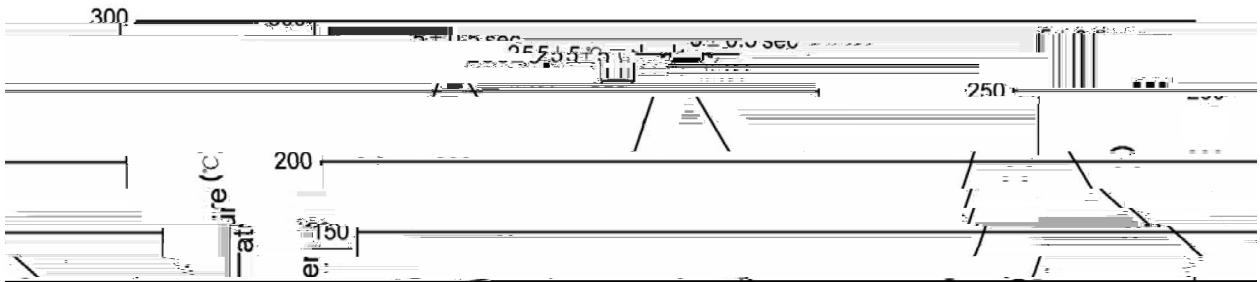

± °C                      ± °C                      ± °C                      ± °C

/ Resistance to Soldering Heat Test Conditions

± °C                      ± °C                      °C

/ Packaging SPEC.

封						Bag	Inner Box	Outer Box
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

封						Tube	Inner Box	Outer Box
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices