

/ Descriptions

SOP-8 P MOS
P-Channel Enhancement Mode Field Effect Transistor in a SOP-8 Plastic Package.


/ Features

$V_{DS}(V)=-30V$ $I_D=-5.0A$
 $R_{DS(ON)} < 65m$ ($V_{GS}=-10V$)
 $R_{DS(ON)} < 75m$ ($V_{GS}=-4.5V$)


/ Applications

Power Management in Notebook computer, Portable Equipment and Battery powered systems and this device is suitable for use as a load switch or in PWM applications.

/ Equivalent Circuit

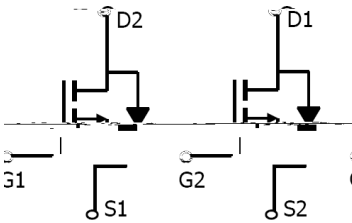

/ Pinning



PIN 1	S2	PIN 2	G2	PIN 3	S1	PIN 4	G1
PIN 5	D1	PIN 6	D1	PIN 7	D2	PIN 8	D2

/ Marking

See Marking Instructions.

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	±12	V
Continuous Drain Current ^A	$I_D (T_a=25^{\circ}C)$	-5.0	A
	$I_D (T_a=70^{\circ}C)$	-4.2	A
Pulsed Drain Current ^B	I_{DM}	-20	A
Power Dissipation for Single Operation ^A	$P_D (T_a=25)$	2.0	W
	$P_D (T_a=70)$	1.4	W
Junction and Storage Temperature Range	T_j, T_{stg}	-55 +150	
Thermal Resistance-Junction to Ambient ^A	$R_{JA} \ t \ 10s$	62.5	/W
	R_{JA}	110	/W
Maximum Junction-to-Lead ^C	R_{JL}	40	/W

Note:

A: The value of R_{JA} is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^{\circ}C$. The value in any given application depends on the user's specific board design. The current rating is based on the t 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.


C. The R_{JA} is the sum of the thermal impedance from junction to lead R_{JL} and lead to ambient.

D. The static characteristics in Figures 1 to 6,12,14 are obtained using 80 μs pulses, duty cycle 0.5% max.


E. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^{\circ}C$. The SOA curve provides a single pulse rating.

Parameter Symbol Test Conditions $\hat{A} 4 \text{ } \rangle$


/ Electrical Characteristic Curve

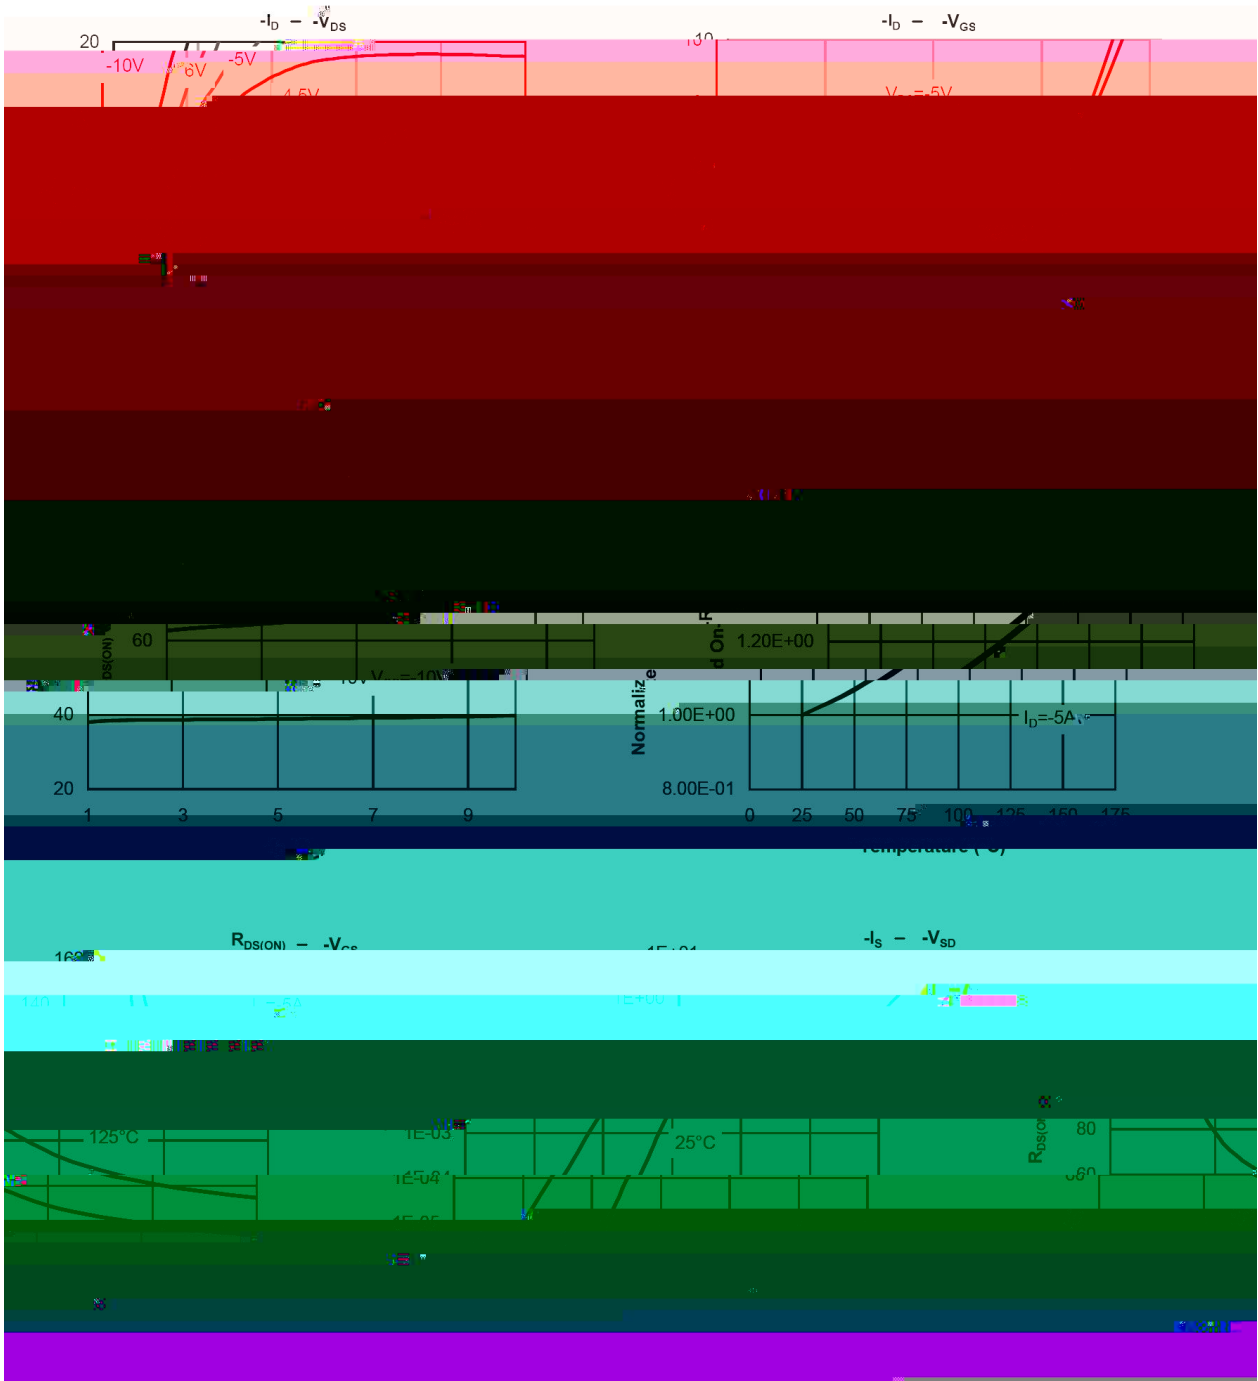

/ **Electrical Characteristic Curve**

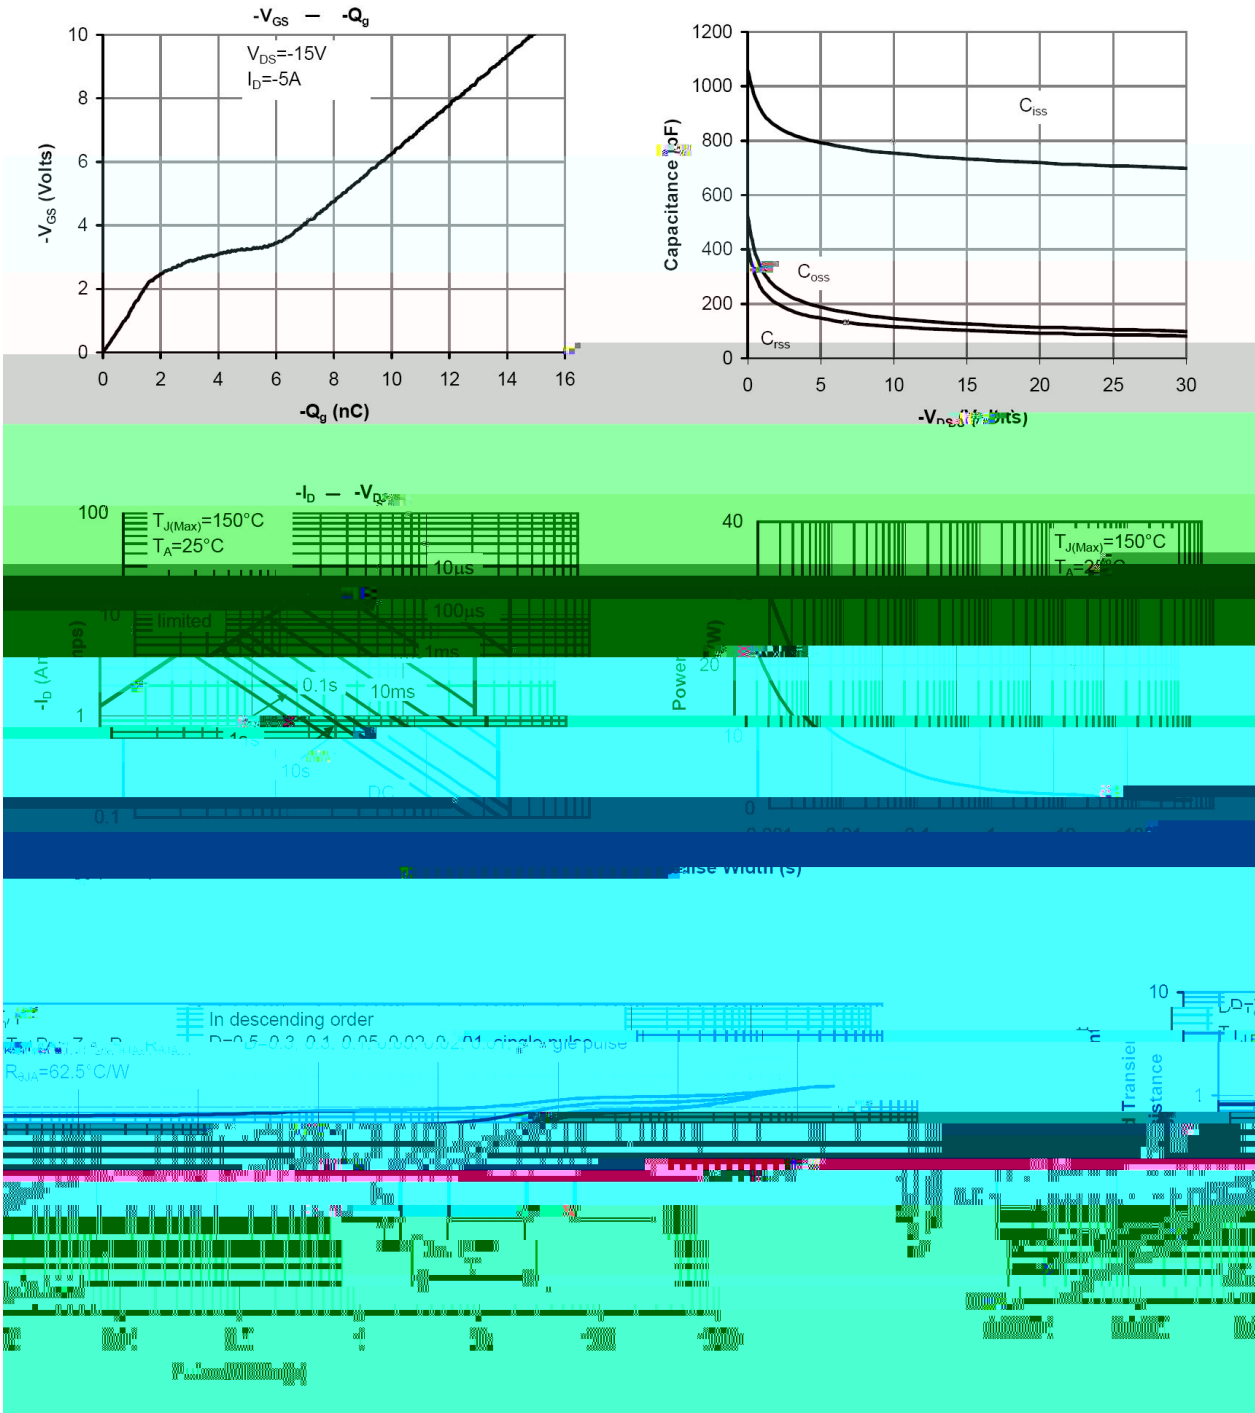

/ Package Dimensions

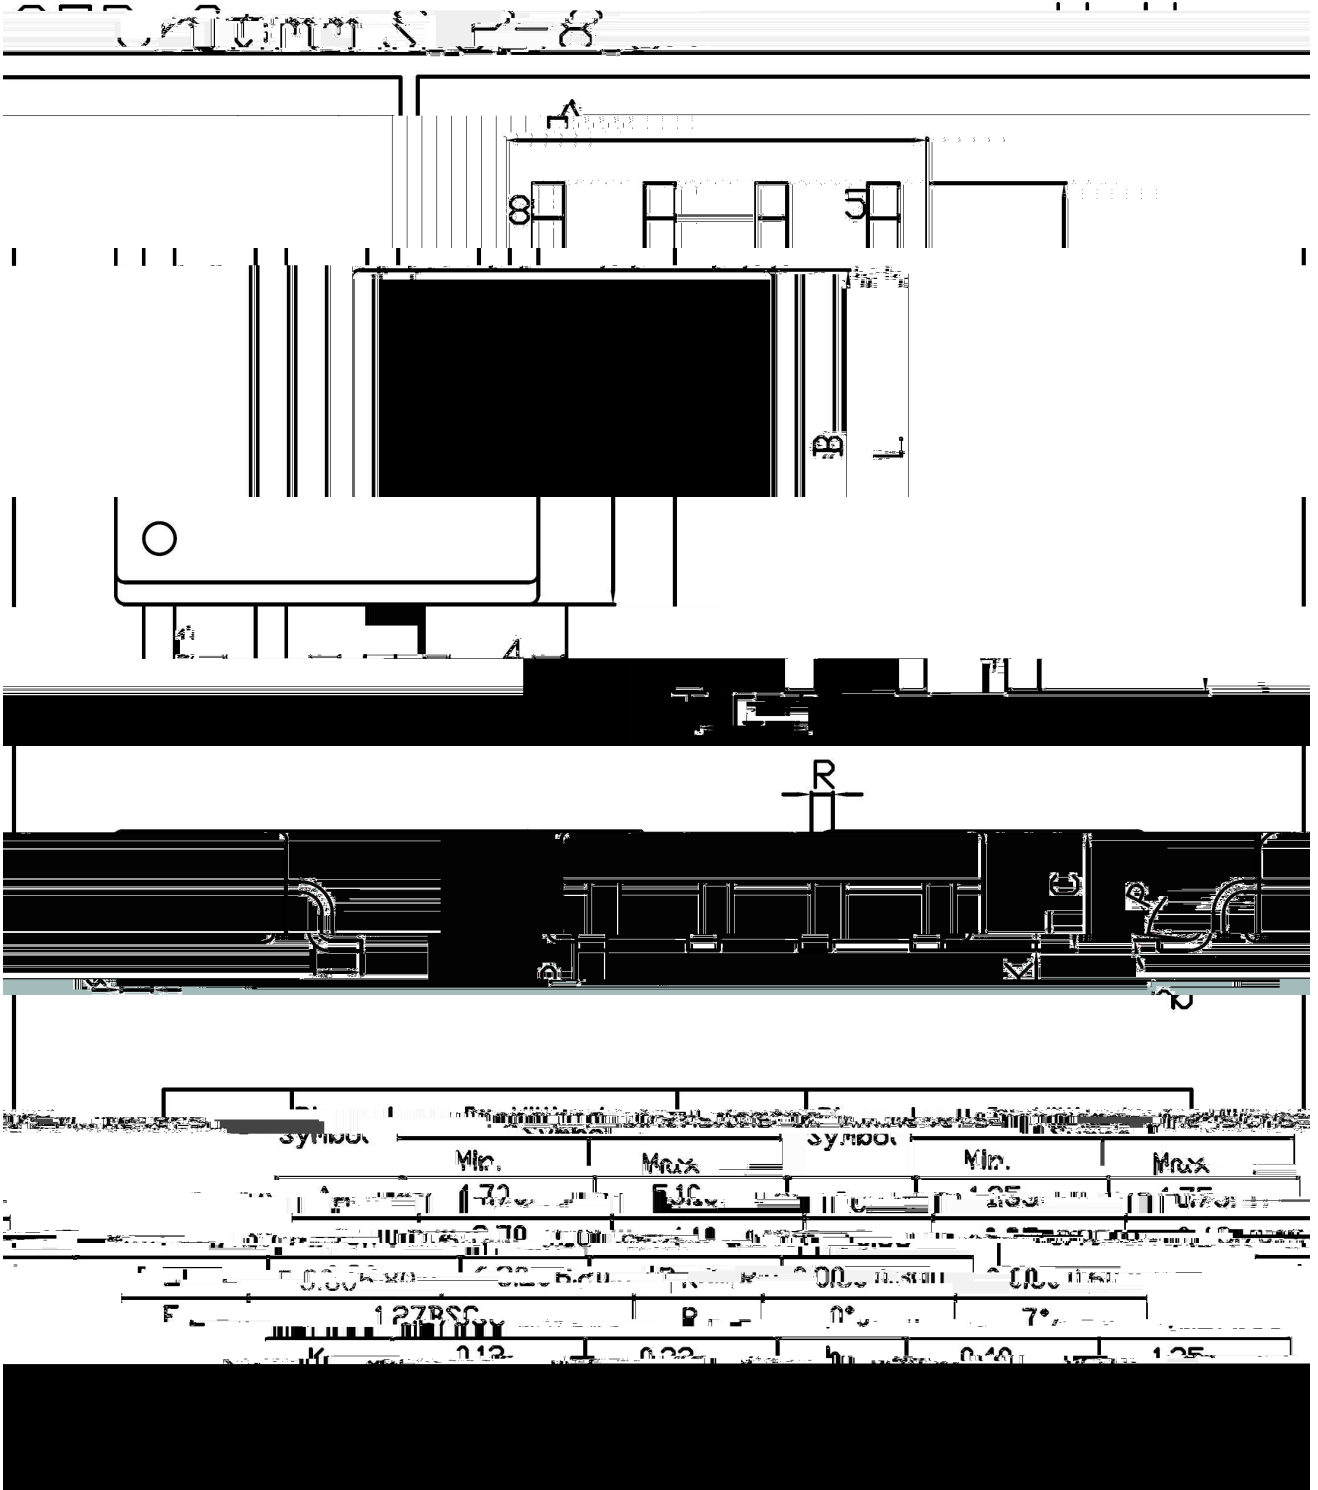

BRCS4803SC BRC()Tj 1 Tf12 0 -43.0914 -69.394BRCS4<http://www.fsbrec.com/>03S7(

BRCS4803SC
Rev.D .Oct.-2018