

# BRDTC114EUAQ

Rev.A Apr.-2023

SOT-323

NPN


Silicon NPN Digital Transistor in a SOT-323 Plastic Package.

AEC-Q101

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

Switching, Inverter circuit, Interface circuit and driver circuit applications, Meet the stringent requirements of automotive applications.


## / Equivalent Circuit

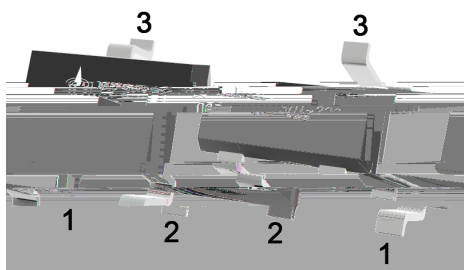

PIN1 Base PIN 2





/ Electrical Characteristic Curve

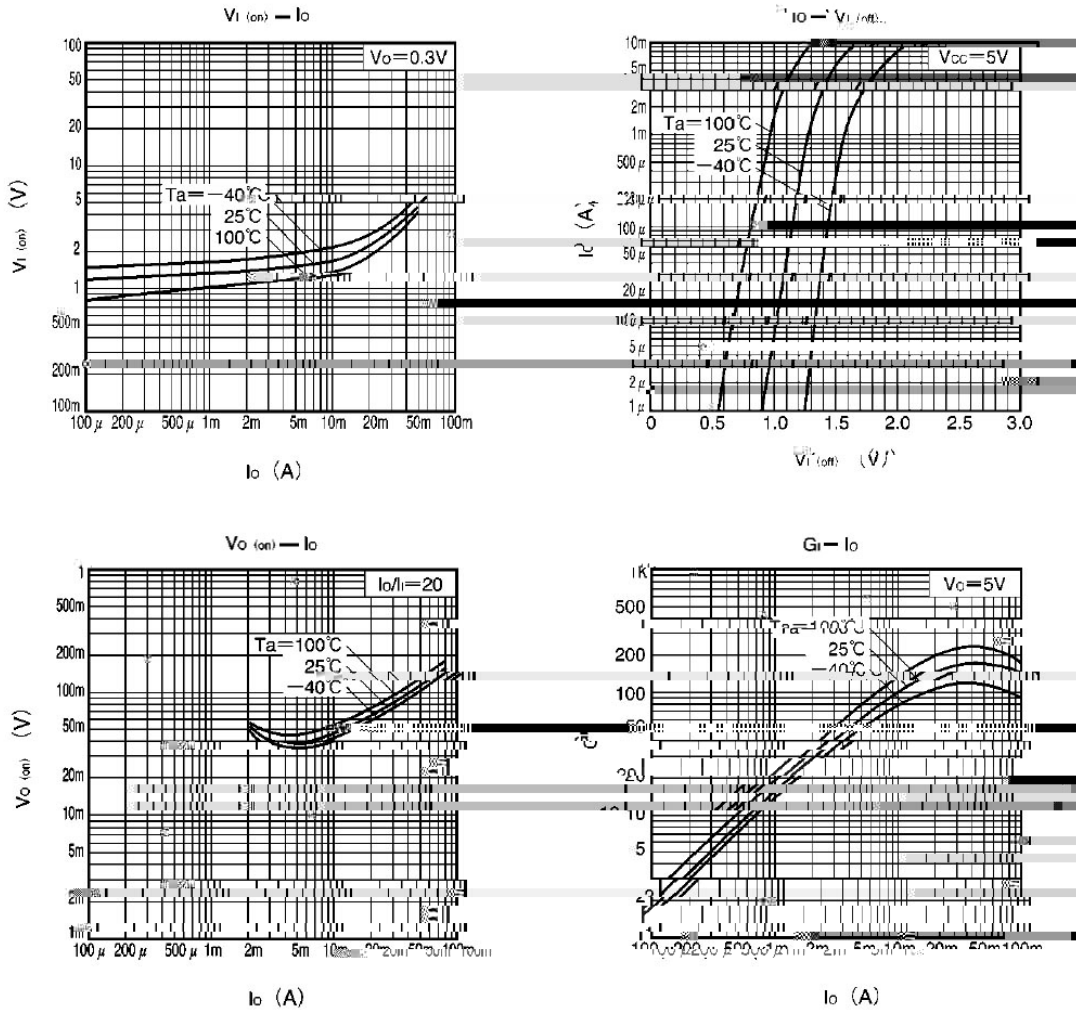

/ Package Dimensions


SMT-323

单位: mm

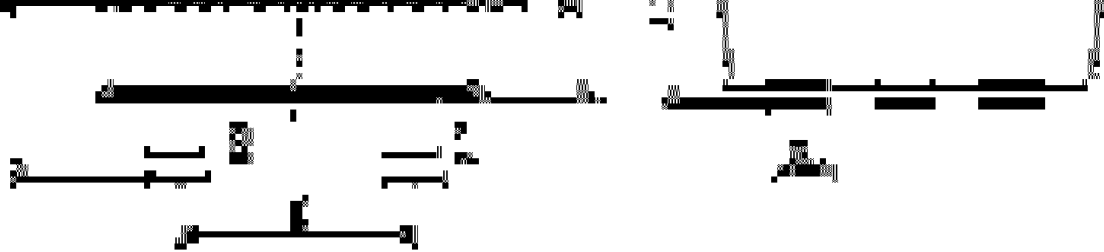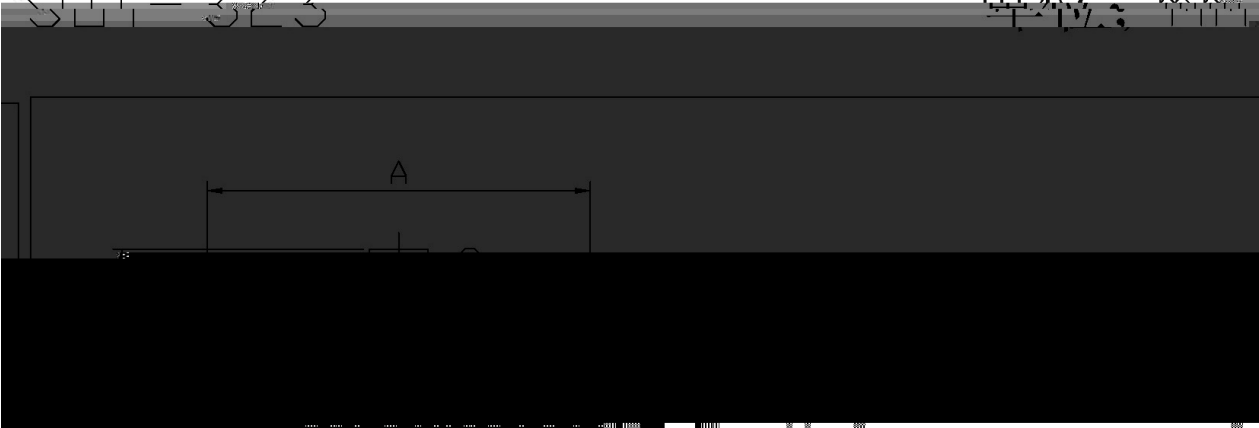

**BRDTC114EUAQ**

( ) /

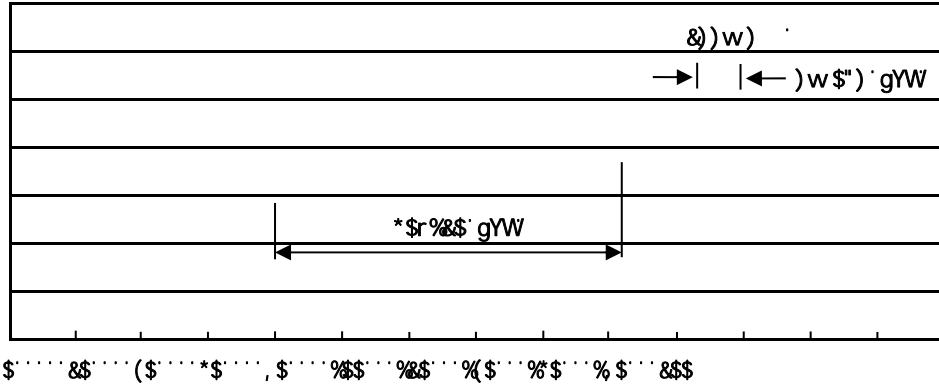

Note:

- 1            150 200            60 120sec;            1.Preheating:150~200 , Time:60~120sec.
- 2            255±5                    5±0.5sec;            2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3                            2 10 /sec.            3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5                    10±1 sec.                    Temp:260±5                    Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm <sup>3</sup> )		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-323	3,000	10	30,000	6	180,000	7 x8	180x120x180	390x385x205

/ Notices