

BRES5V0X1B2ZPQ

Rev.A Oct.-2025



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

DFN1006-2L

ESD

DFN1006-2L Plastic Package 1-Line,Bi-directional , ESD Protection Diode.

1ns

20KV

IEC61000-4-2

4

ESD

AEC-Q101

Ultra small package, Response Time is Typically < 1 ns, ESD > 20 kV per Human Body Model,IEC61000-4-2 Level 4 ESD Protection, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

MP3

Suitable for cellular phones audio,MP3 players, Digi

BRES

5V


0X

1B

2Z

PQ

/ Package Dimensions

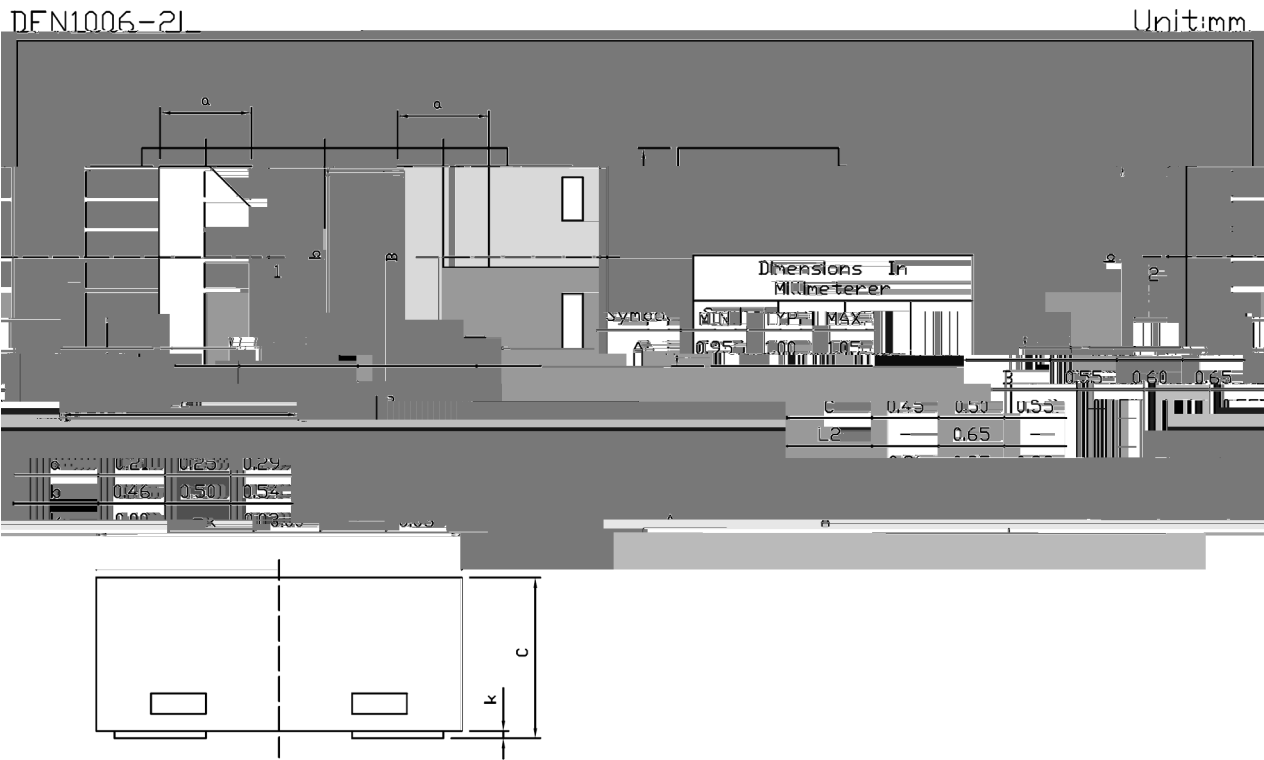

Rev.01 202108

BRES

5V


0X

1B

2Z

PQ

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

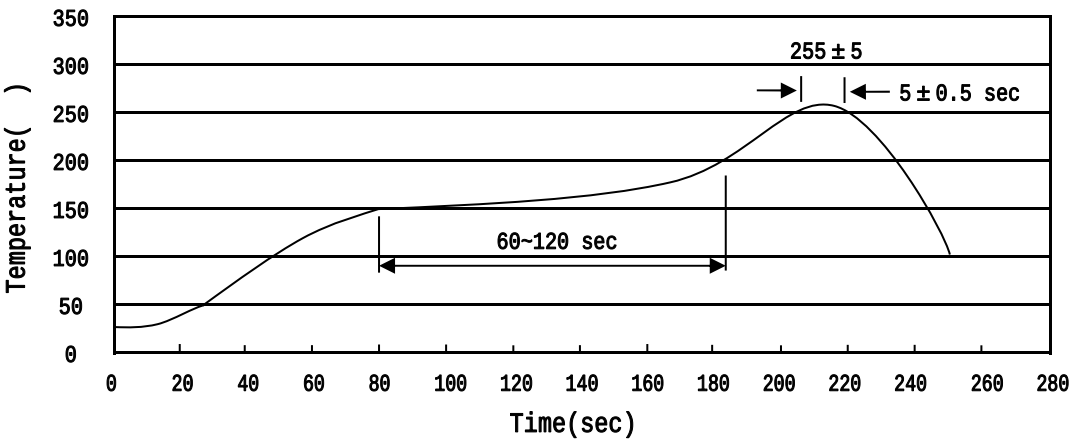

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200 , Time:60~120sec.
- 2

255±5

5±0.5sec;

2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
DFN1006-2L	10,000	10	100,000	6	600,000	7 ×8	180×120×180	390×385×205

/ Notices