


TO-220F N MOS N-CHANNEL MOSFET in a TO-220F Plastic Package.

Low gate charge, low crss, fast switching.

These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.




PIN1 G

PIN 2 D

PIN 3 S

See Marking Instructions.

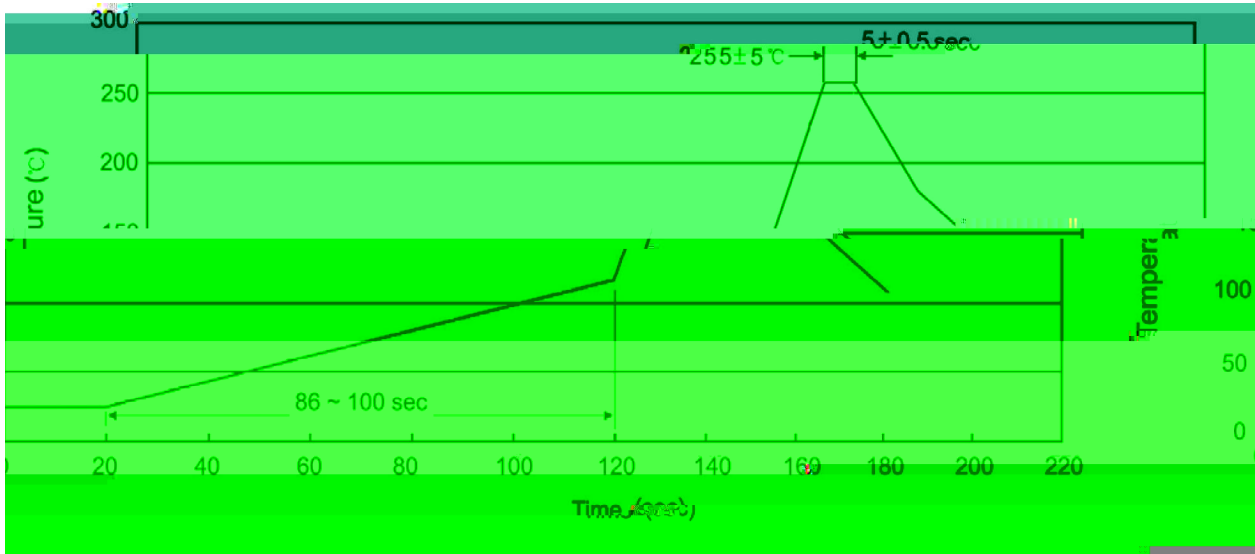


Note:

- | | | | | | |
|---|-----|-----|----|----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255 | 5 | 5 | 0.5sec; | 2.Peak Temp.:255 5 , Duration:5 0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

270 ± 5 10 ± 1 sec. Temp.:270±5 Time:10±1 sec

/ BULK

Package Type	Units	Dimension	(unit mm ³)
--------------	-------	-----------	-------------------------