





Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DSS}$	600	V

/ Electrical Characteristic Curve

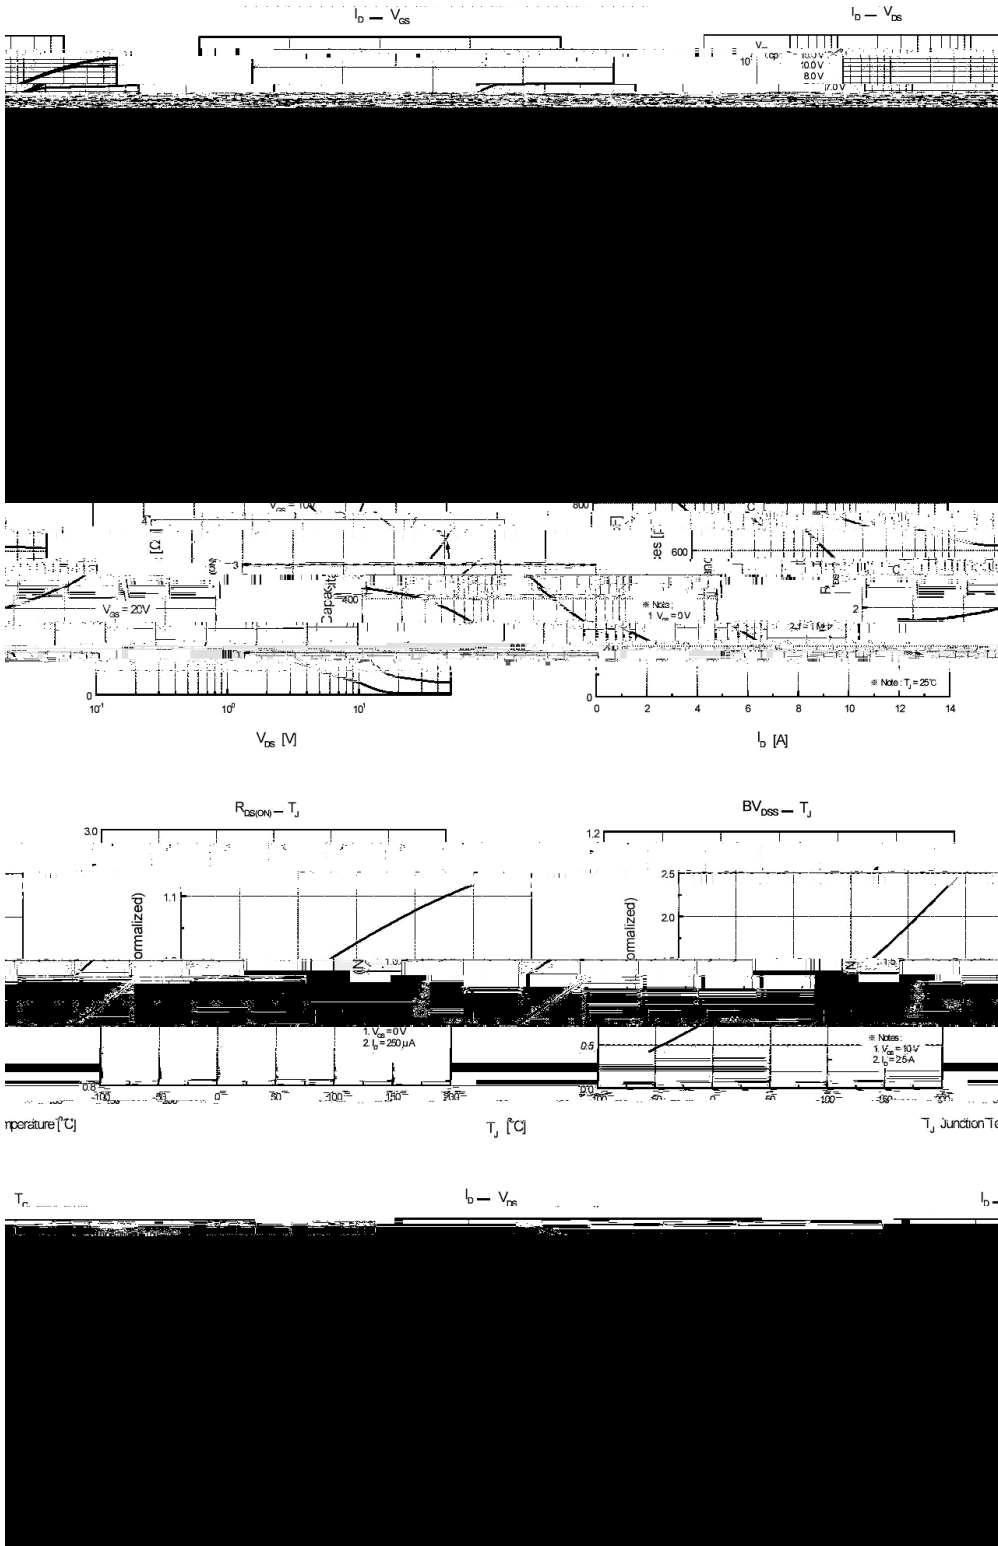


/ Package Dimensions

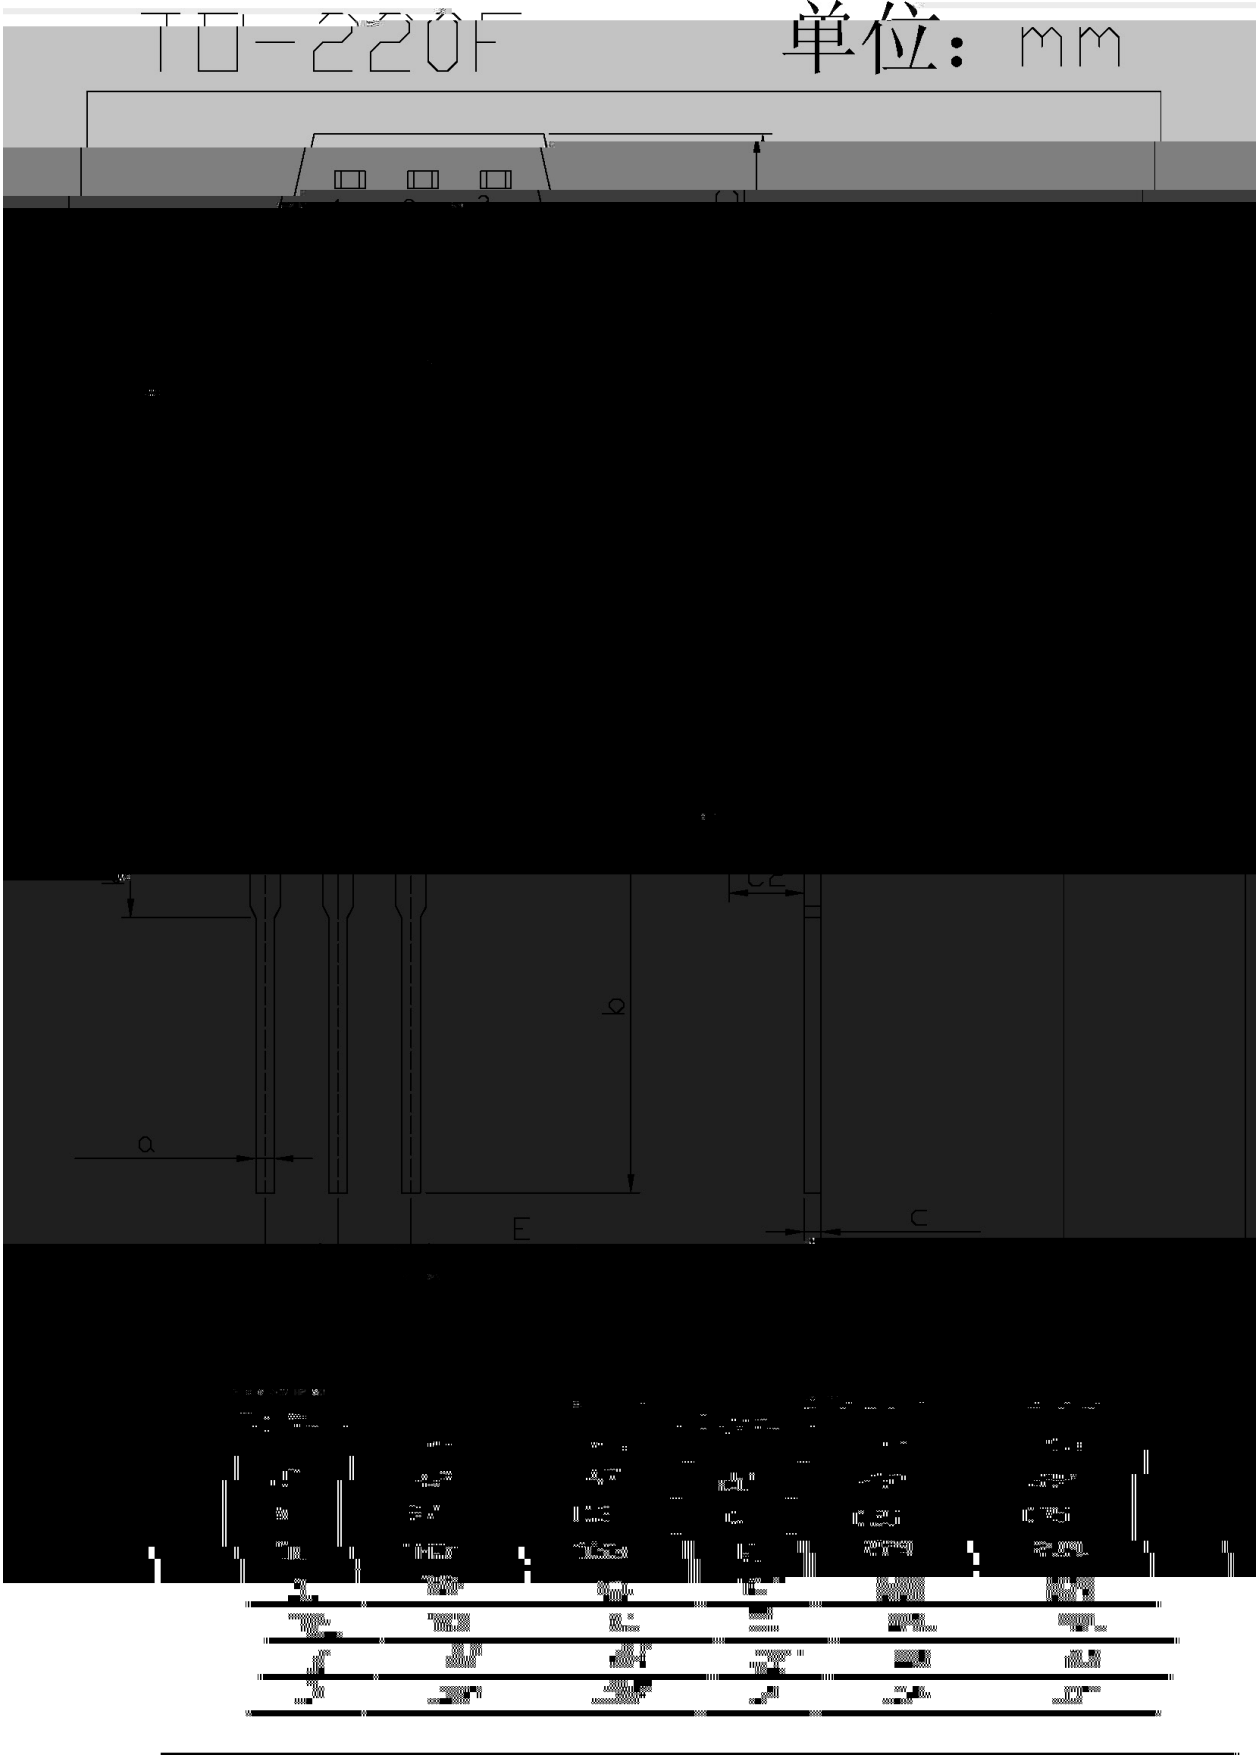



( ) / Temperature Profile for Dip Soldering(Pb-Free)

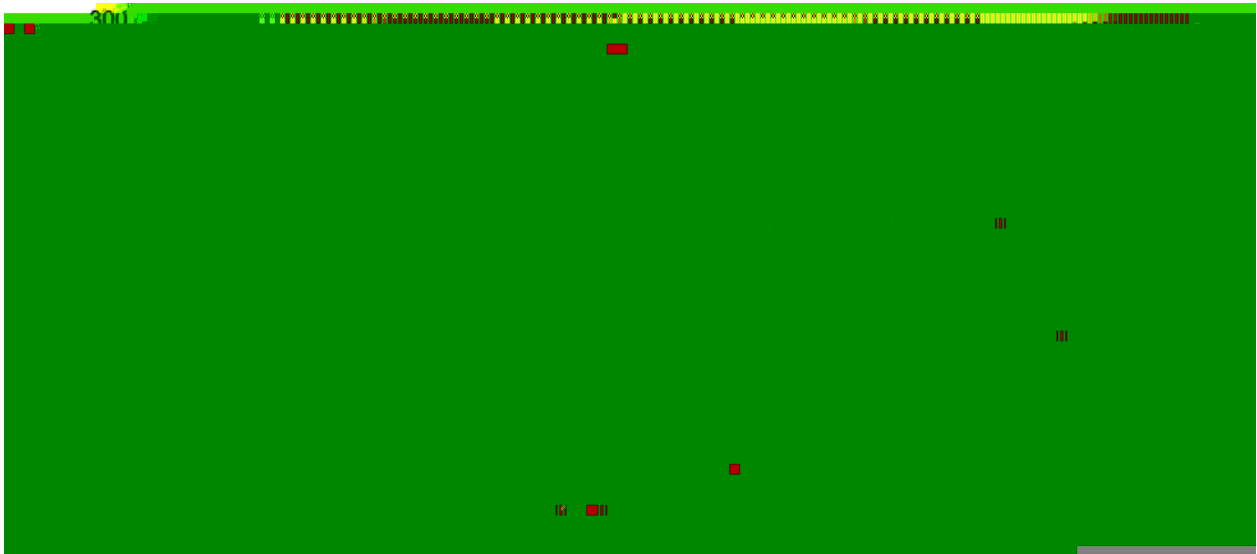

1	25	150	60	90sec;	Note:	1.Preheating:25~150 , Time:60~90sec.
2	255±5		5±0.5sec;		2.Peak Temp.:255±5 , Duration:5±0.5sec.	
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.	

/ Resistance to Soldering Heat Test Conditions

270±5                      10±1 sec.                      Temp.:270±5                      Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units 包装数量 Units/Inner Box 只/盒	Dimension 包装尺寸 (unit: mm <sup>3</sup> )
----------------------	------------------	-----------------------	--------------------------------------	---