


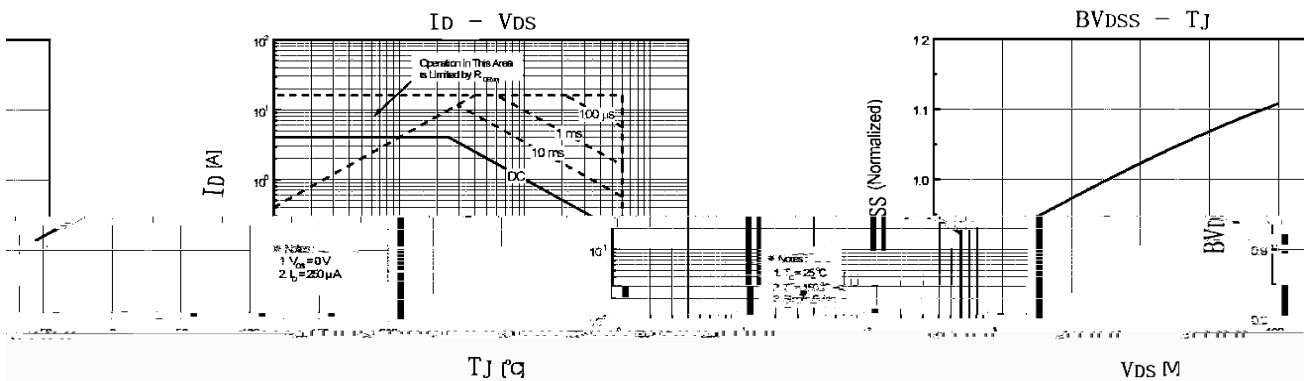
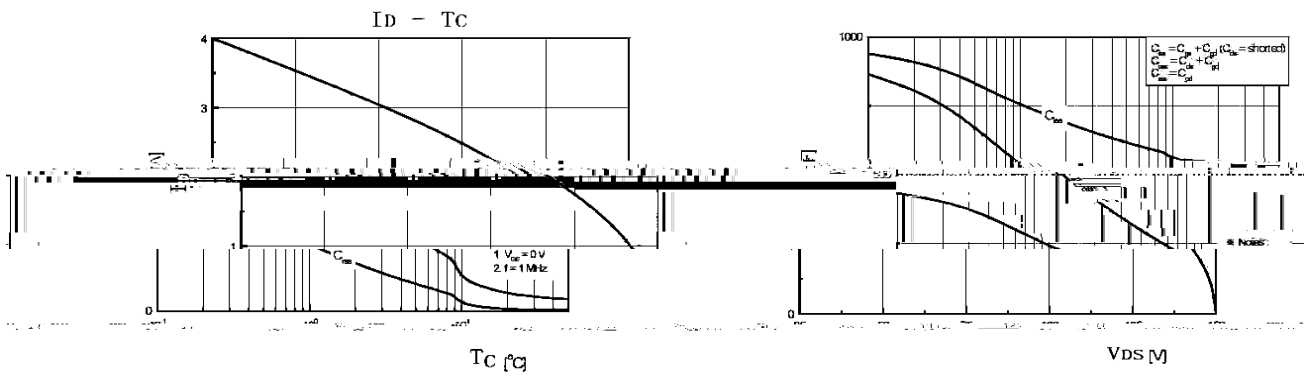


**BRI4N65**  
Rev.E Aug.-2017


TO-251          N

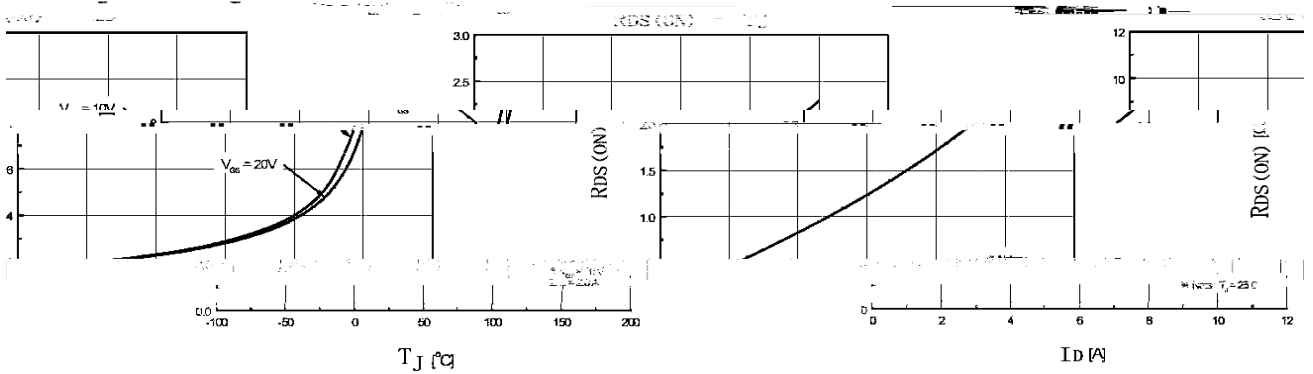

**/ Electrical Characteristic Curve**

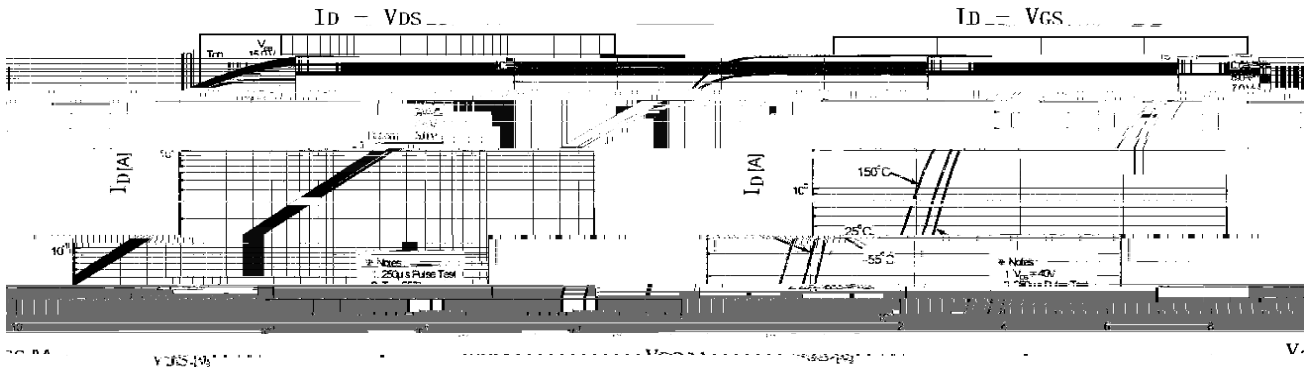


**/ Package Dimensions**

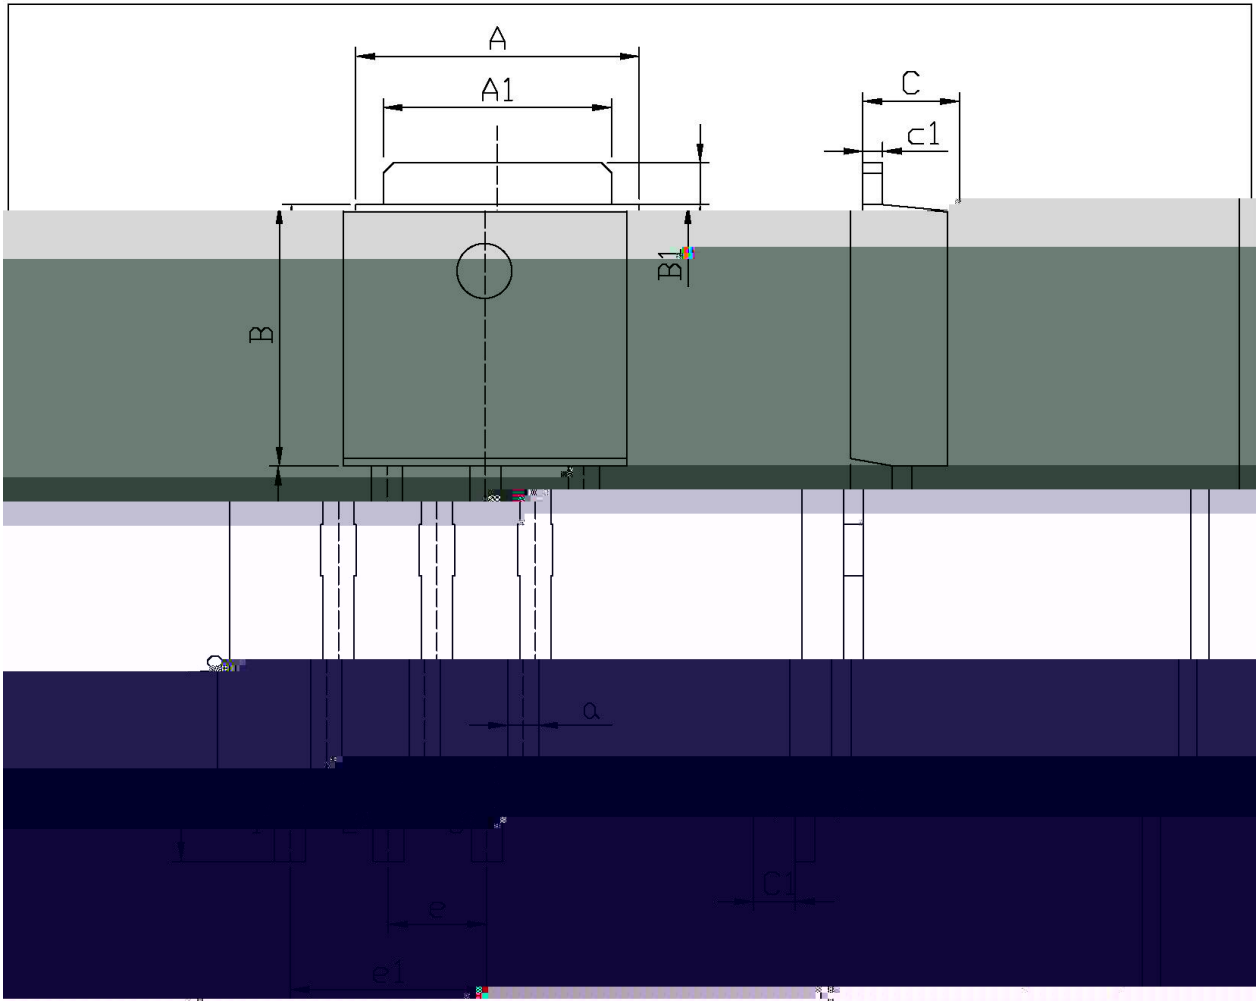

单位: mm

Dimensions In Millimeters		Symbol	Dimension In Millimeters		Symbol
Min	Max		Min	Max	
6.45	6.75	a	0.50	0.70	A
5.10	5.50	b	9.00	9.40	A1
5.75	6.25	c	0.45	0.55	B
0.95	1.25	c1	0.45	0.55	B1
2.20	2.40	e	2.20	2.40	C

/ Marking Instructions

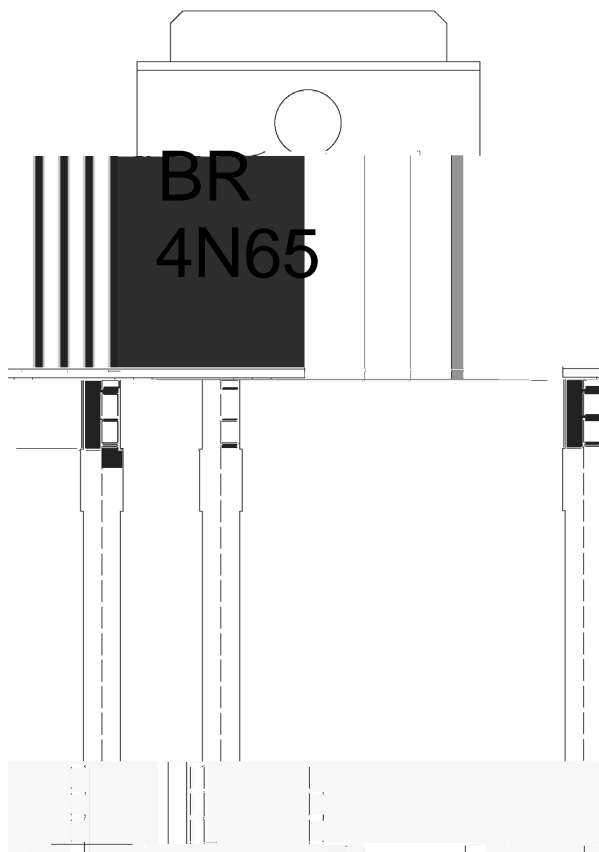

BR

+E -

!!!!


Note:

BR: Company Code

4N65: Product Type.

\*\*\*\*: Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

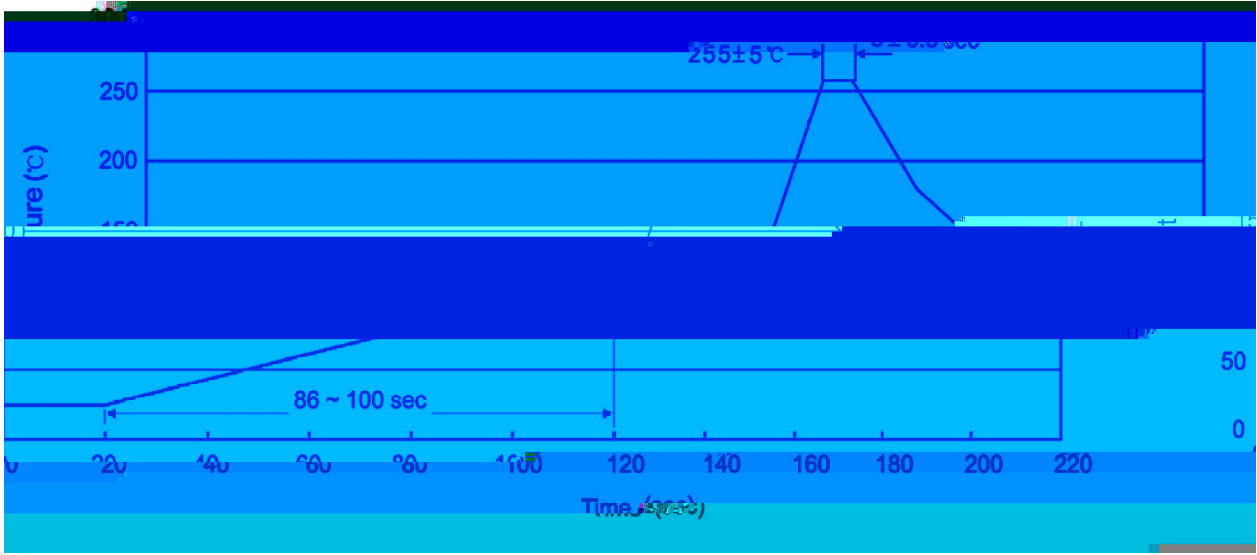

Note:

- |   |        |     |            |          |   |
|---|--------|-----|------------|----------|---|
| 1 | 25     | 150 | 60         | 90sec;   | 1.Preheating:25~150 , Time:60~90sec.      |
| 2 | 255..5 |     | 5..0.5sec; |          | 2.Peak Temp.:255..5 , Duration:5..0.5sec. |
| 3 |        |     | 2          | 10 /sec. | 3. Cooling Speed: 2~10 /sec.              |

/ Resistance to Soldering Heat Test Conditions

270..5                      10..1 sec.                      Temp.:270±5                      Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units				Dimension			(unit mm <sup>3</sup> )

/ TUBE

Package Type                      Units                      Dimension                      (unit