



BRI740
Rev.A Sep.-2023

TO-251 N

/ Package Dimensions

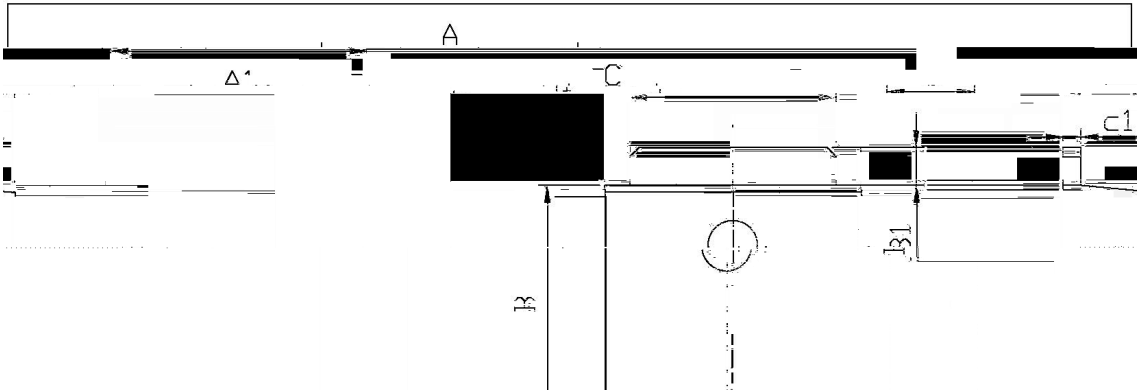


单位: mm

Symbol	Min	Max	Symbol	Min	Max
A1	5.70	5.50	b1	9.00	9.40
0.45	0.55		0.45	0.55	
R1	0.95	1.25	c1	0.45	0.55
0.24	0.25		0.24	0.25	
0.24	0.25		0.24	0.25	
0.24	0.25		0.24	0.25	



/ Marking Instructions

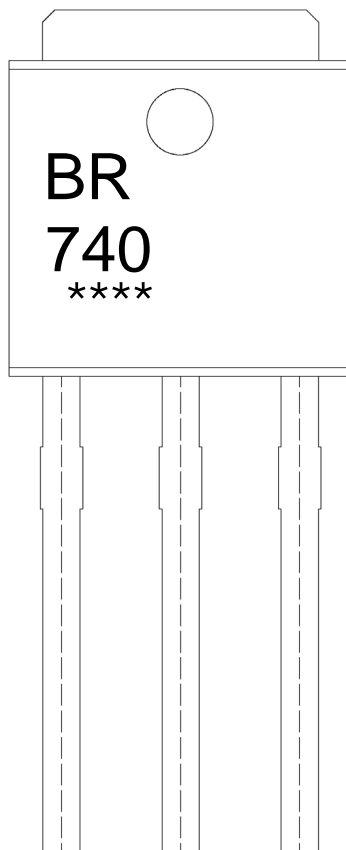

BR

740


Note:

BR: Company Code

740: Product Type Code

****: Lot No. Code, code change with Lot No

() / Temperature Profile for Dip Soldering(Pb-Free)

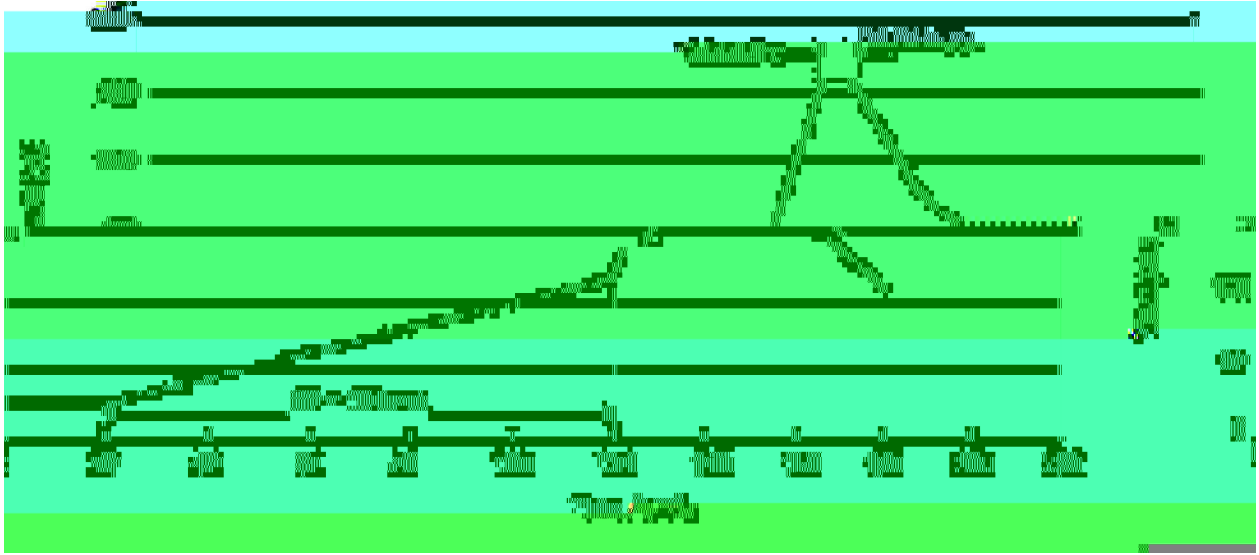

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm ³)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box