

## / Descriptions


TO-252

## / Features

## / Applications

## / Equivalent Circuit

## / Pinning



## / $h_{FE}$ Classifications & Marking






**/ Absolute Maximum Ratings(Ta=25 )**

		×	

**/ Electrical Characteristics(Ta=25 )**



- 1.
- 2.

**/ Electrical Characteristic Curve**

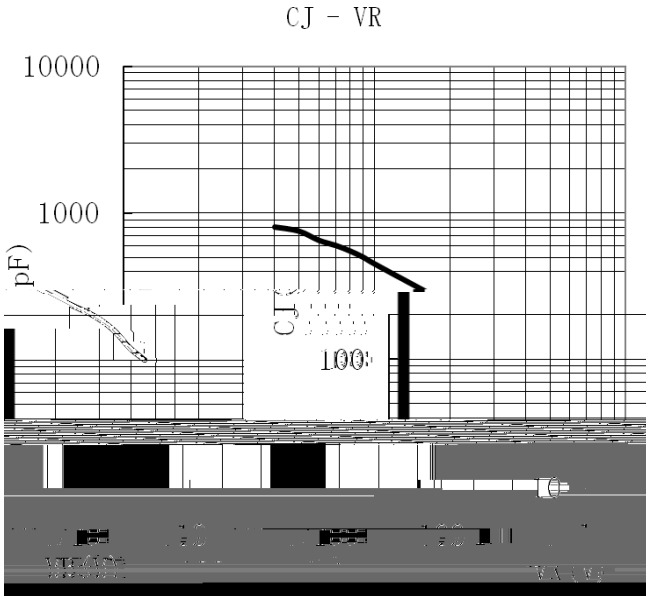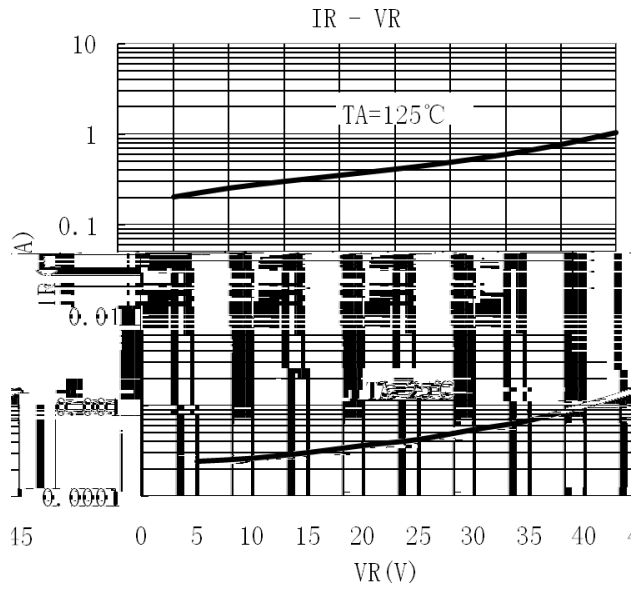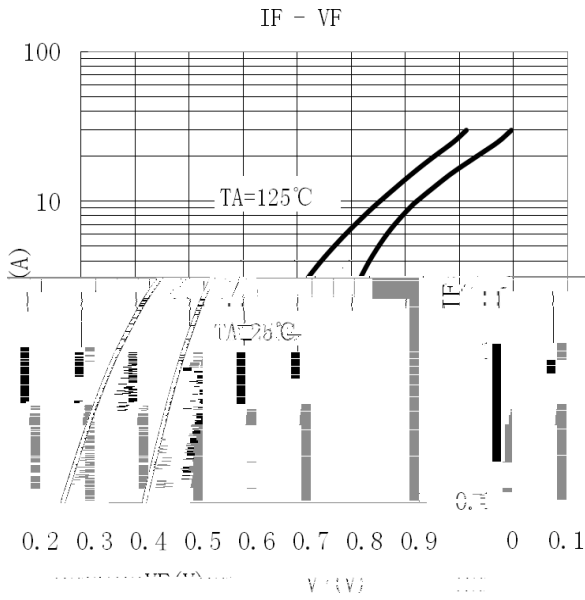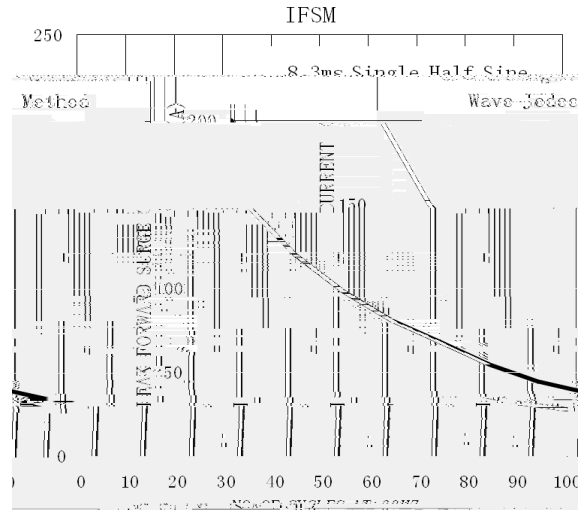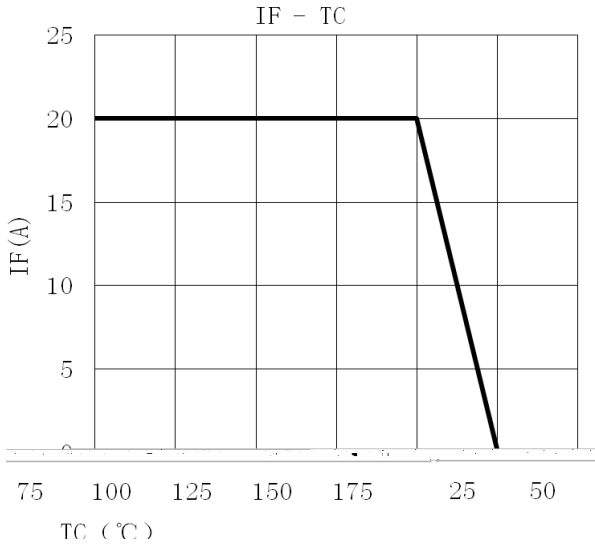




## / Marking Instructions

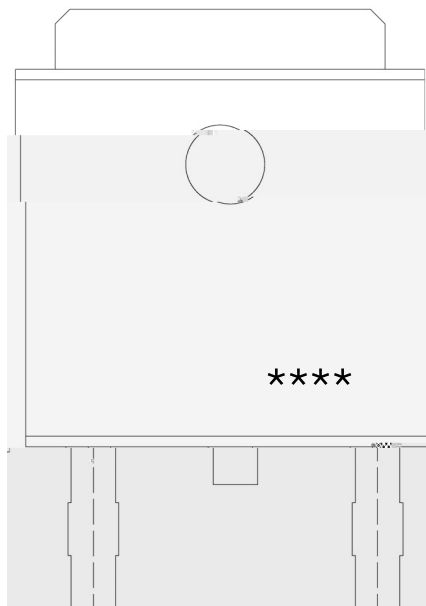

：

\*\*\*\*

( ) /

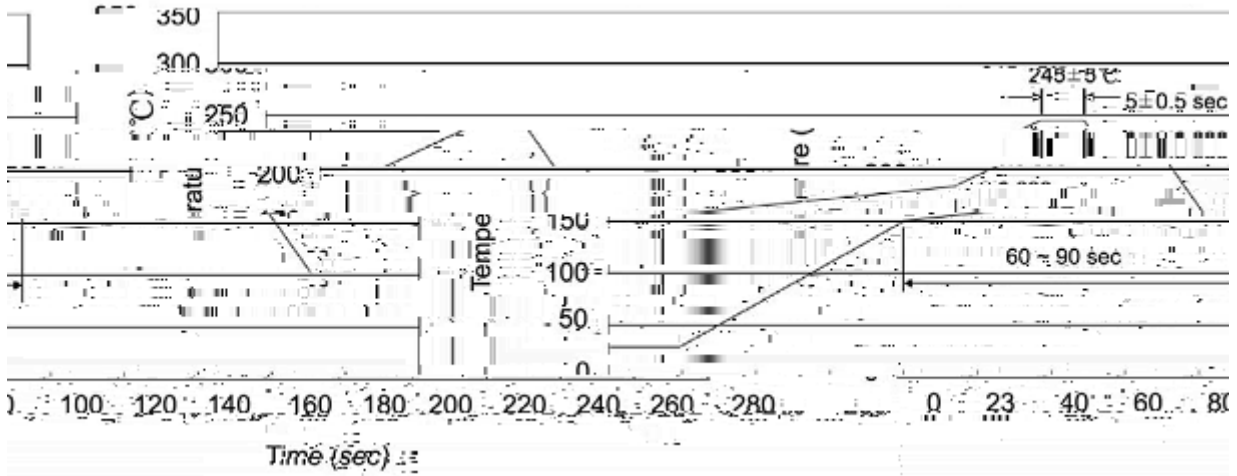

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	5	25,000	13 ×16	360×360×50	385×257×392