

5 é / Descriptions

:5 .> // x 6 4 6 !- } â 'ož
Silicon PNP transistor in a TO-252 Plastic Package.


α^a / Features

ó 9 ä k ... ` ' +) 7 ö Ö ä U ´ Å } L k —) í D } ož
High voltage, Qualified to AEC-Q101 Standards for High Reliability, HF Product.


Đ ÷ / Applications

9%² " ä 9 è k á V ñ • } Lož
High voltage general purpose applications, Meet the stringent requirements of automotive applications.

Ã W] Ô . / Equivalent Circuit



• Ū - æ / Pinning

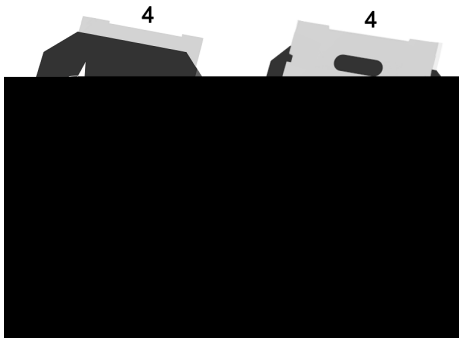



PIN1 y Base PIN 2,4 y Collector PIN 3 y Emitter

Z Ü B , M V / h_{FE} Classifications & Marking

• - ~^a ϕ ož
See Marking Instructions.


@ f Parameter	... Z Symbol	f › Rating	% y Unit
Collector to Base Voltage	V _{CBO}	-300	V
Collector to Emitter Voltage	V _{CEO}	-300	V
Emitter to Base Voltage	V _{EBO}	-5	V
Collector Current - Continuous	I _C	-500	mA
Collector Power Dissipation	P _C	1.56	W
Collector Power Dissipation	P _C (T _C =25)		

Electrical Characteristic Curve

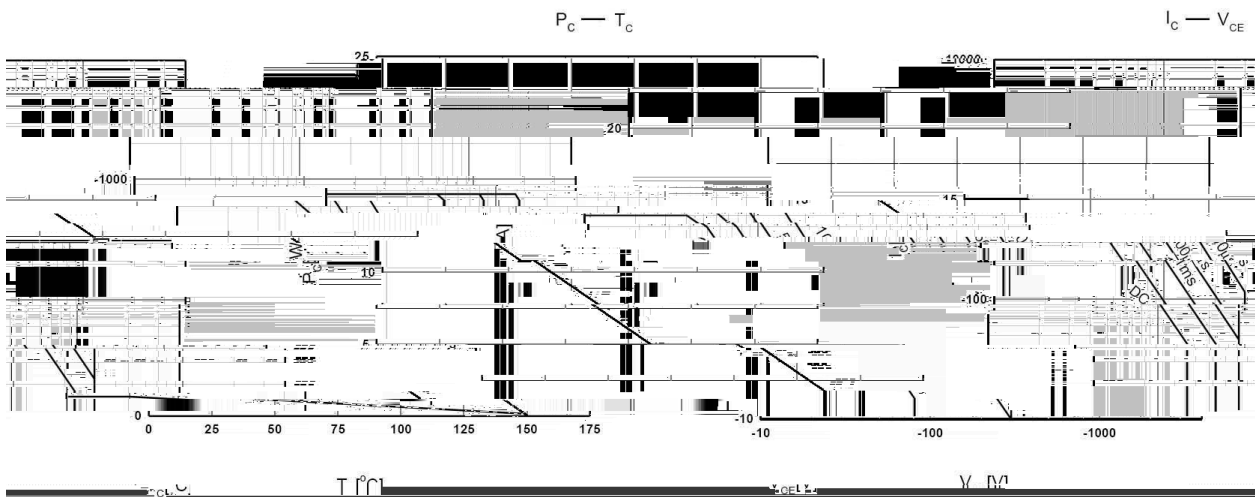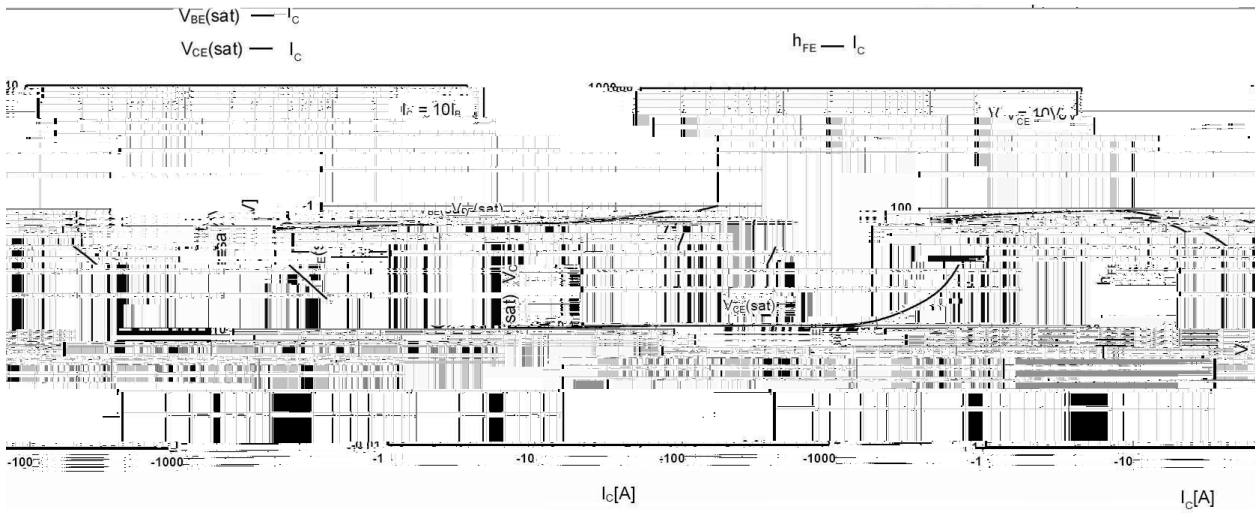




, M y f / Marking Instructions

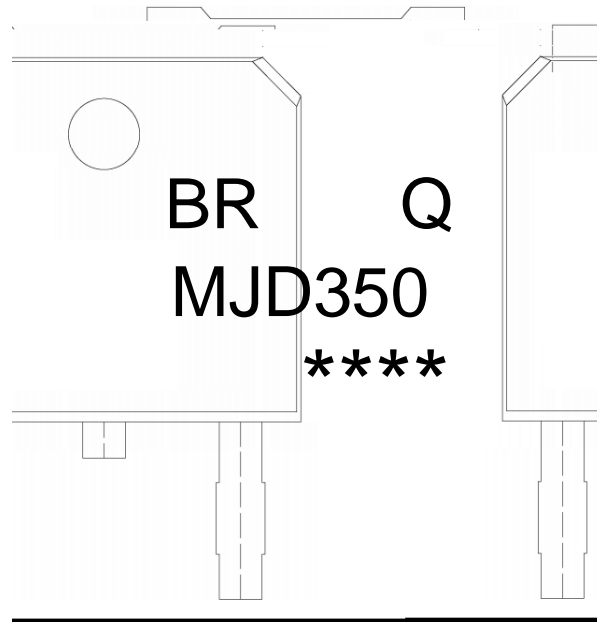

- ^a ϕ y
- BR y , [W A
- Q y V ñ —)í D } ö œ
- 3 0 * y D } ° Z
- y ÿ D Z W A k š ÿ D Z J
- Note:
- BR: Company Code
- Q: Automobile halogen-free product Code
- MJD350: Product Type
- ****: Lot No. Code, code change with Lot No

šWD t...•Žç (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

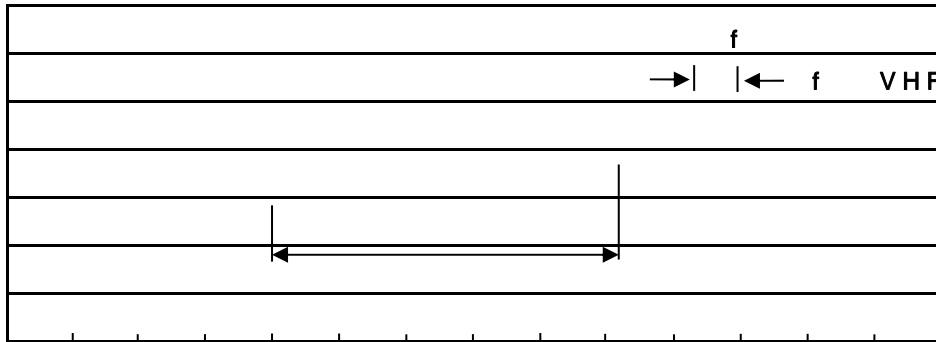

^açy

Note:

- 1. Preheating: 150~200 - , Time: 60~120sec;
- 2. Peak Temp.: 255 r5 - , Duration: 5 r0.5sec;
- 3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p ~ »] / Resistance to Soldering Heat Test Conditions

"†y 260 r5 - ž•y 10 r1 sec. Temp.: 260±5 Time: 10±1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type 7>û ~ E	Units ;>û iH					Dimension ;>û p . (unit Åmm ³)		
	Units/Reel / - -	Reels/Inner Box - - / -	Units/Inner Box / -	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç
TO-252	2,500	2	5,000	6	30,000	13 s x16	360x360x50	380x335x366

ì' x / TUBE

Package Type 7>û ~ E	Units ;>û iH					Dimension ;>û p . (unit Åmm ³)		
	Units/Tube /•1x	Tubes/Inner Box •1x / -	Units/Inner Box / -	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Tube•1x	Inner Box	Outer Boxç
TO-251/252	75	48	3,600	5	18,000	526x20.5x5.25	555x164x50	575x290x180

„Đ y f / Notices