

/ Revised record

	! " #	\$! % & '	! () % * +	, -	. /
D	2015-12				
E	2020-7-30	1	0 1 2 3 4 5,0 6 7 8 9 3 4 5	: ; <	= > ?
A	2022-2-11		6 7 8 9 3 4 5@A B C D 3 4 5 E	F G	H I J

BRMJE172D

Rev.A Feb.-2022

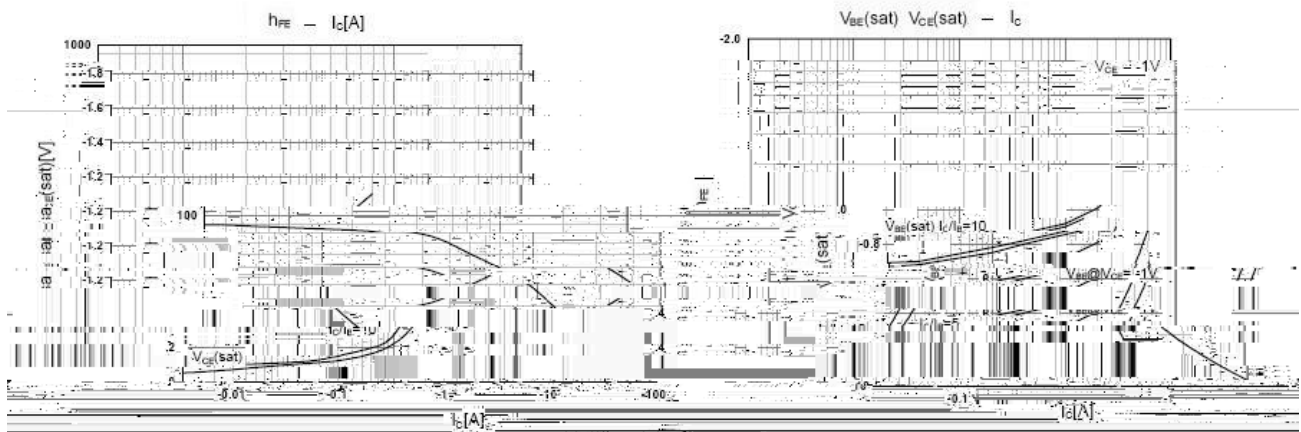


DATA SHEET

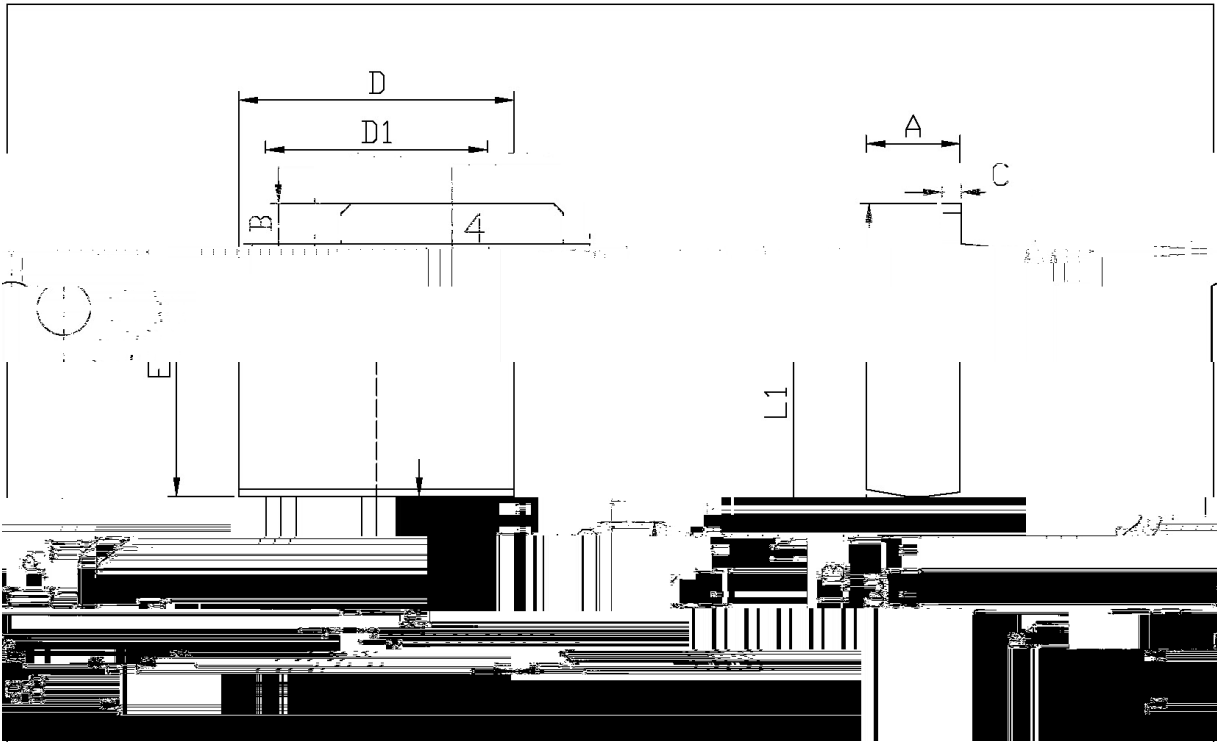
TO-252

PNP





/ Electrical Characteristic Curve



/ Package Dimensions



Unit: mm

					
D	6.45	6.75	L3	0.60	0.90

TOH252

BRMJE172D

Rev.A Feb.-2022

DATA SHEET

<http://>

() / Temperature Profile for Dip Soldering(Pb-Free)

Note:
1.Preheating:150~180℃, Time:60~90sec.

1 150℃~180℃ 60~90sec;
2 245±5℃ = 10min