









Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	100	V
Drain Current – Continuous	I_D	170	mA
Drain Current– Pulsed	$I_D(T_C=25^\circ C)$	680	mA
Continuous Drain–Source	I_S	170	mA
Gate-Source Voltage	V_{GS}	± 20	V







Rev.A May.-2022

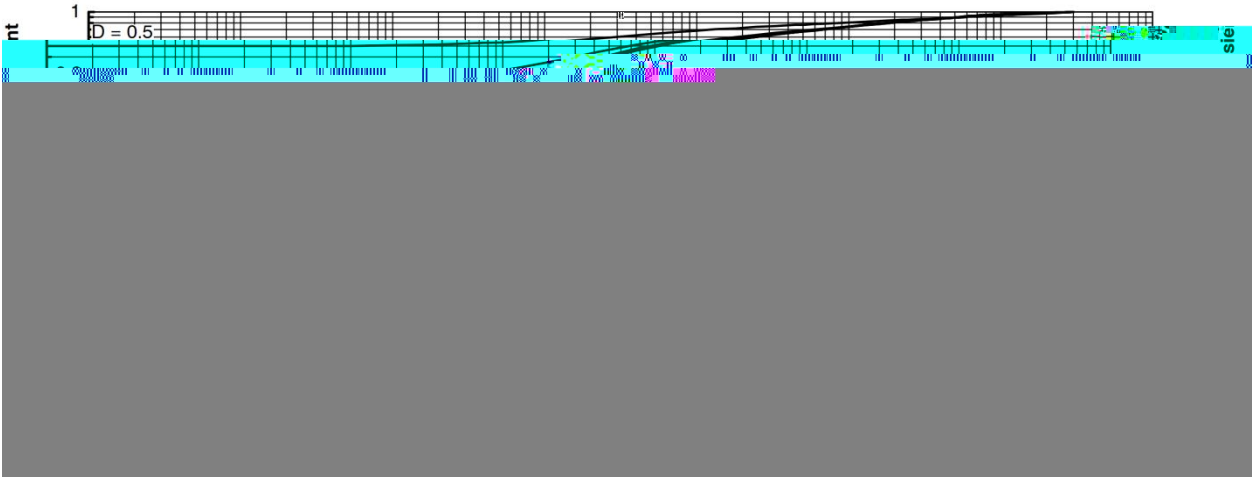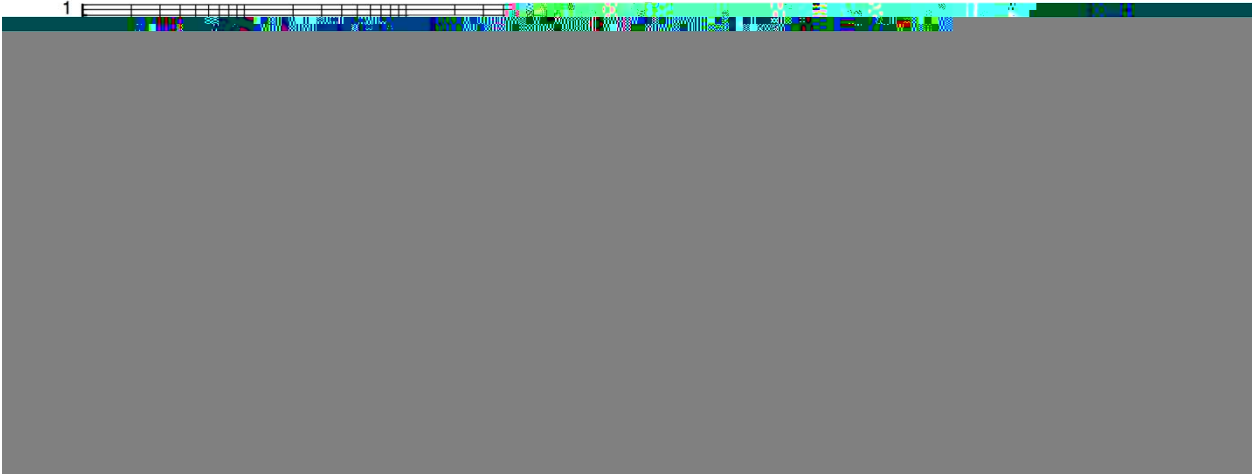

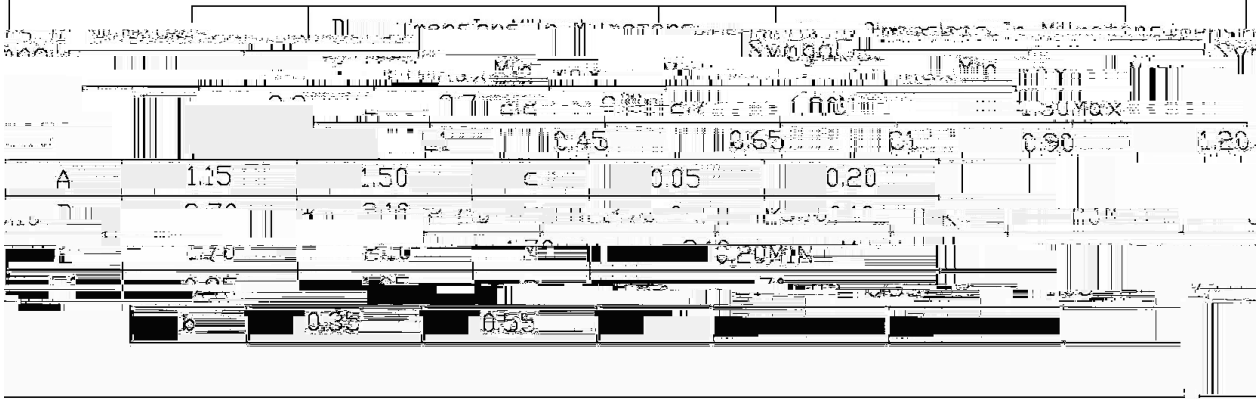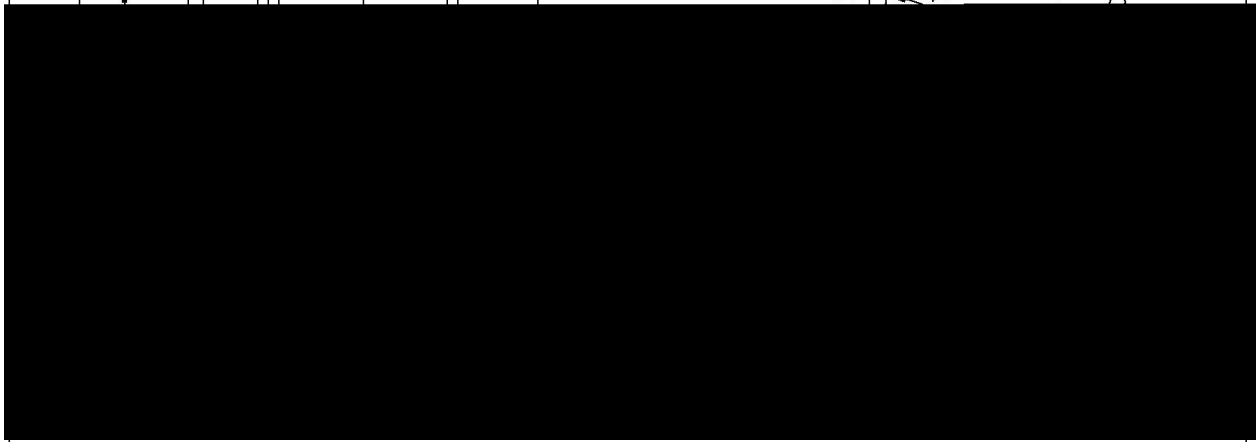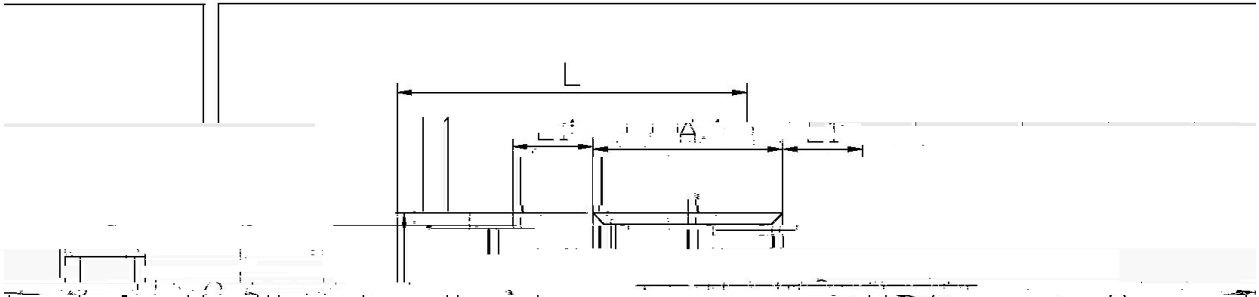



H

SA

Note:

H: Company Code

SA: Product Type



- | | | | | |
|---|---------|-----------|-------|--|
| 1 | 150 180 | 60 90sec; | Note: | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 | 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

260±5°C 10±1 sec. Temp.:260±5 Time:10±1 sec

/ REEL