

**/ Descriptions**

40V                      3.0A                      SOD-123FL  
Surface Mount Schottky Barrier Rectifier Reverse Voltage 40V Forward Current 3.0A SOD-123FL thin package

**/ Features**

Low power loss high efficiency,High forward surge current capability,For use in low voltage,high frequency inverters,and polarity protection applications,For surface mounted applications,HF Product.


**/ Applications**

General purpose.

**/ Equivalent Circuit**




**/ Pinning**

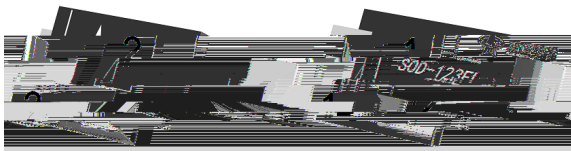

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

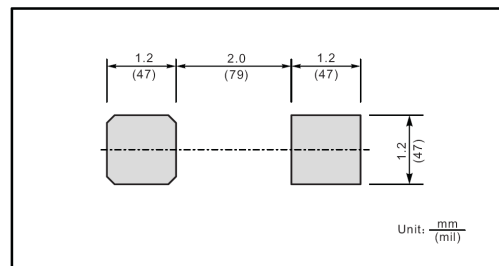

**/ Marking**

See Marking Instructions.

**/ Absolute Maximum Ratings(Ta=25 )**

Parameter	Symbol	Rating	Unit
		DSL34W	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	40	V
Maximum RMS Voltage	$V_{RMS}$	28	V
Maximum DC Blocking Voltage	$V_{DC}$	40	V
Maximum Average Forward Rectified Current	$I_{F AV}$	3	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	$I_{FSM}$	50	A
Typical Junction Capacitance <sup>1</sup>	$C_i$	230	pF
Typical Thermal Resistance <sup>(2)</sup>	$R_{JA}$	80	/W
Operating Junction Temperature Range	$T_j$	-55 ~ +125	
Storage Temperature Range	$T_{stg}$	-55 ~ +125	

Note:

- 1 Measured at 1MHz and applied reverse voltage of 4 V D.C.
- 2 P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

**/ Electrical Characteristics(Ta=25 )**

Parameter	Symbol	Test Conditions	Rating	Unit
			DSL34W	
Maximum Instantaneous Forward Voltage	$V_F$	$I_F=3.0A$	0.45	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$I_R$	$T_a=25$	1.0	mA
		$T_a=100$	20	

/ Electrical Characteristic Curve

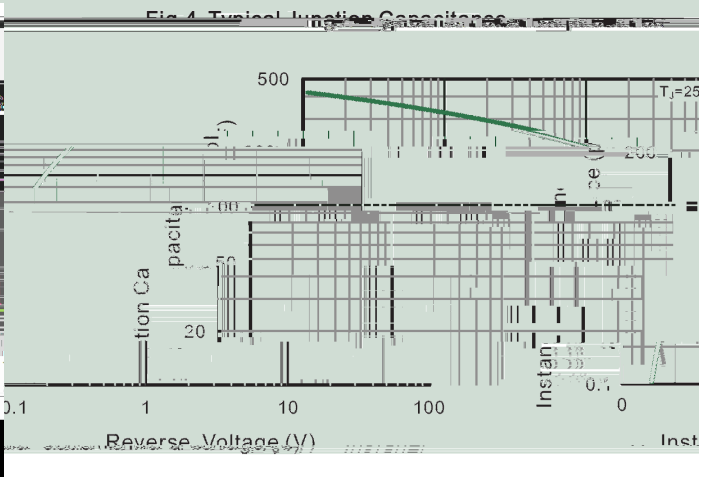
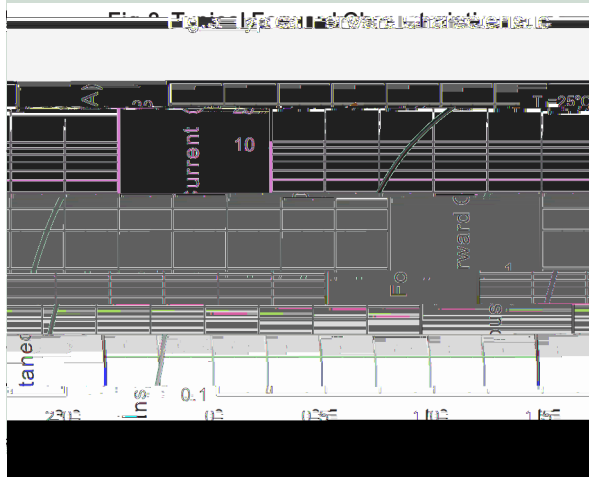
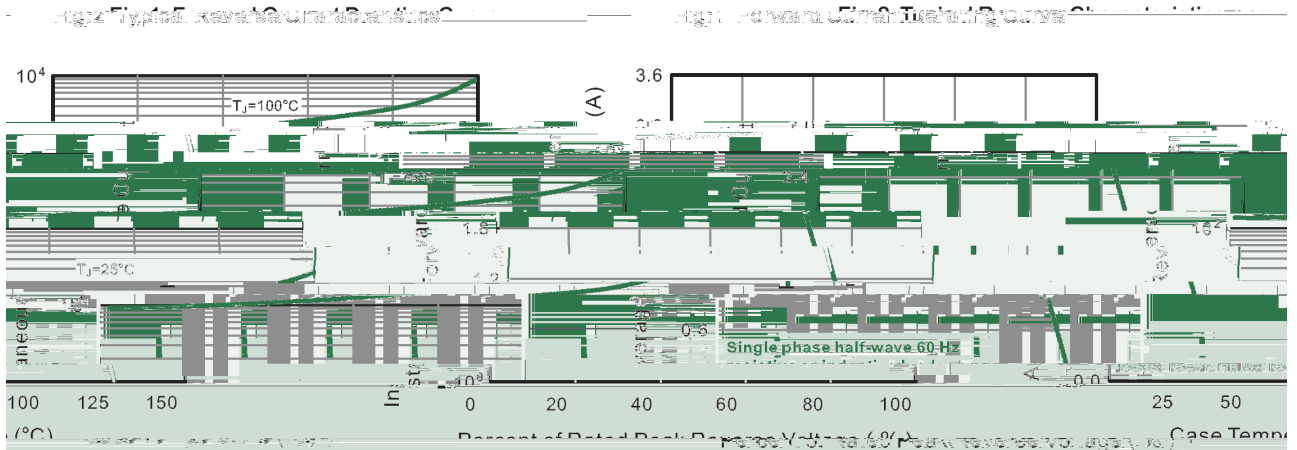



Fig. 2 Typical Reverse Current vs. Case Temperature

Fig. 3 Typical Forward Characteristics


Fig. 4 Typical Junction Capacitance

/ Package Dimensions

SOD-123FL

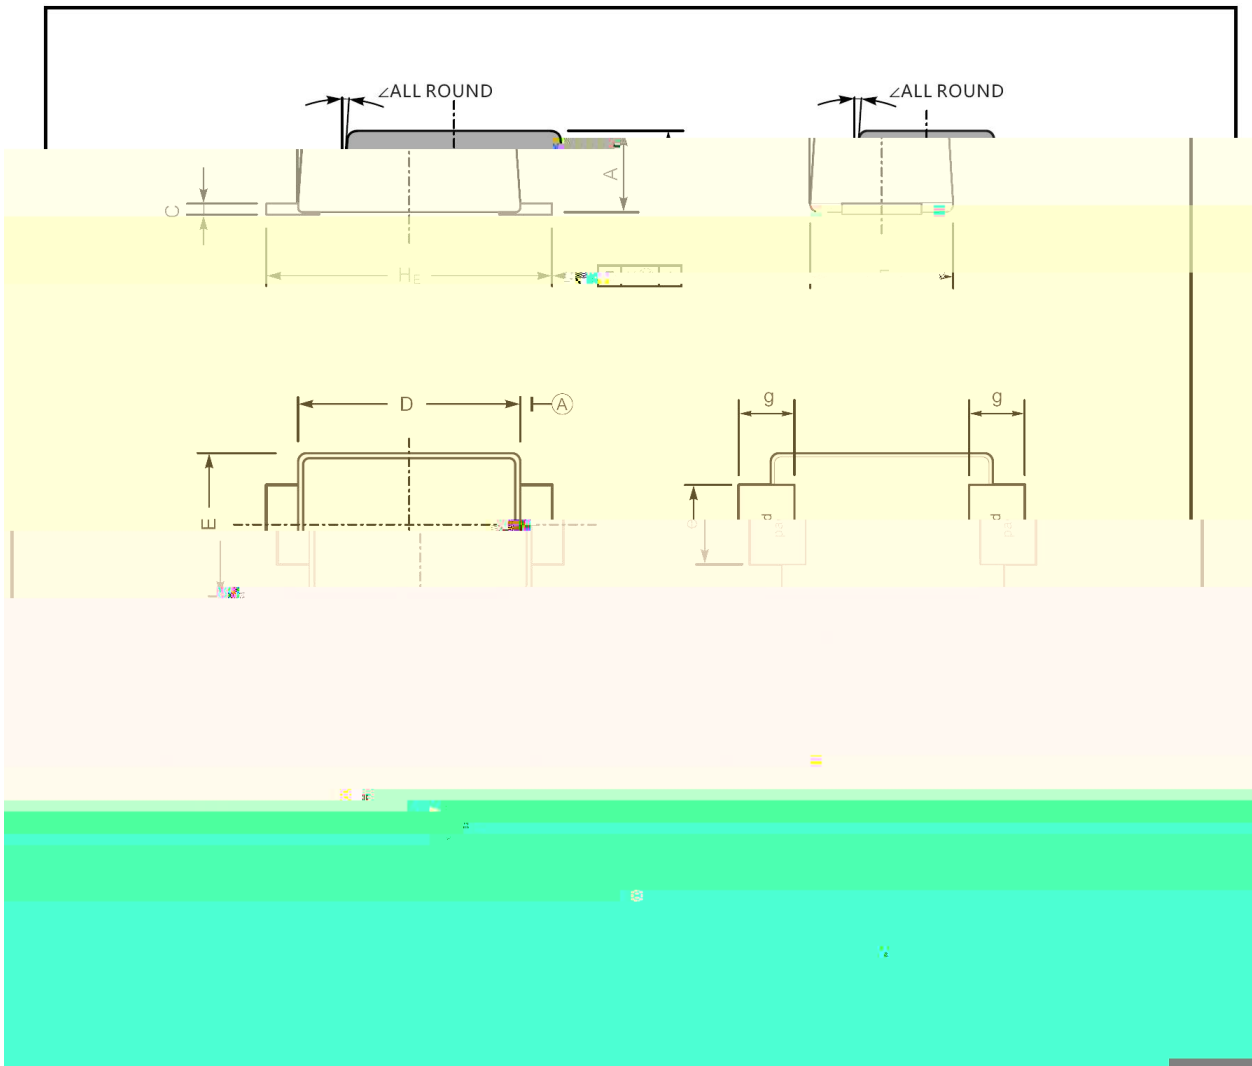

**/ Marking Instructions**

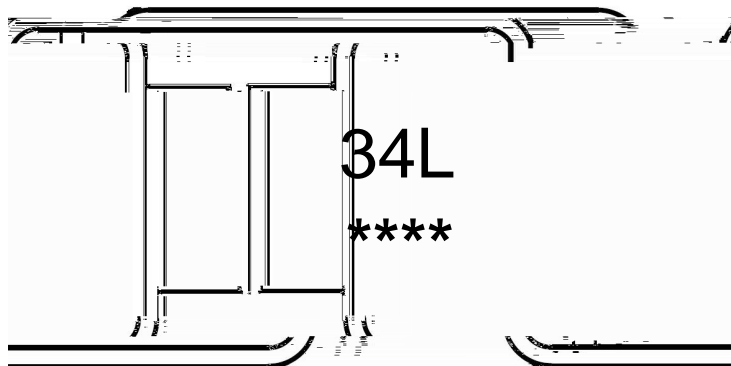

34L  
\*\*\*\*

Note:

34L      Product Type Code

\*\*\*\*      Lot No. Code, code change with Lot No

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)


Note:

- 1            150 180            60 90sec;            1.Preheating:150~180 , Time:60~90sec.
- 2            245±5            5±0.5sec;            2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3