




--	--	--	--	--



'+' -032/;</490'

'

'+'=-7<2-0'

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process,HF Product.


'+' &; ;/37</490''

Switching applications, interface circuit and driver circuit applications.

'+' *@>/.7?-9<' /23>/<'



'+' A/99/9:'



PIN 1 IN PIN 2 GND PIN 3 OUT


'+' 6 728/9:'

Marking	H62
---------	-----

!"#\$%&

Rev.A Apr.-2022

& &'()* **






' '+''*?-3<2/37?' 17273<-2/0</3' >2.-'





'+' A7387: -' /D-90/490'

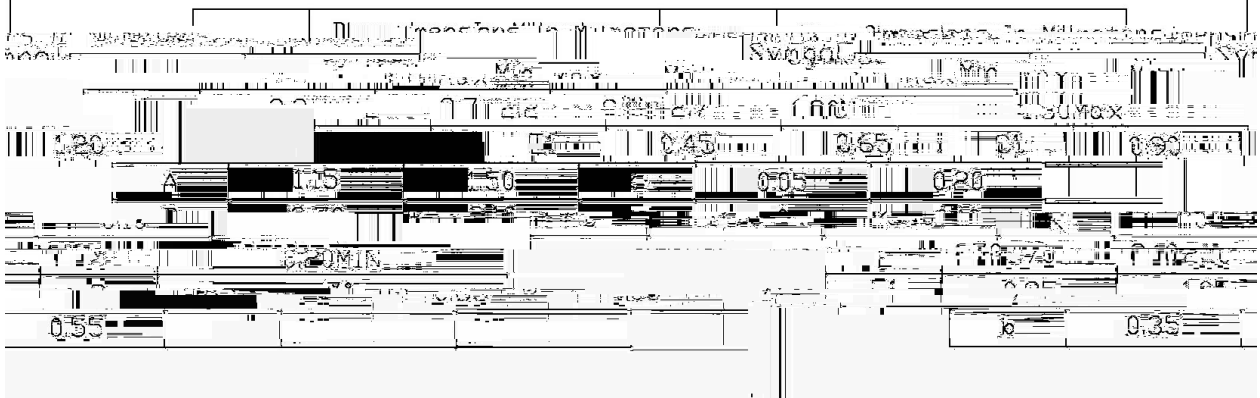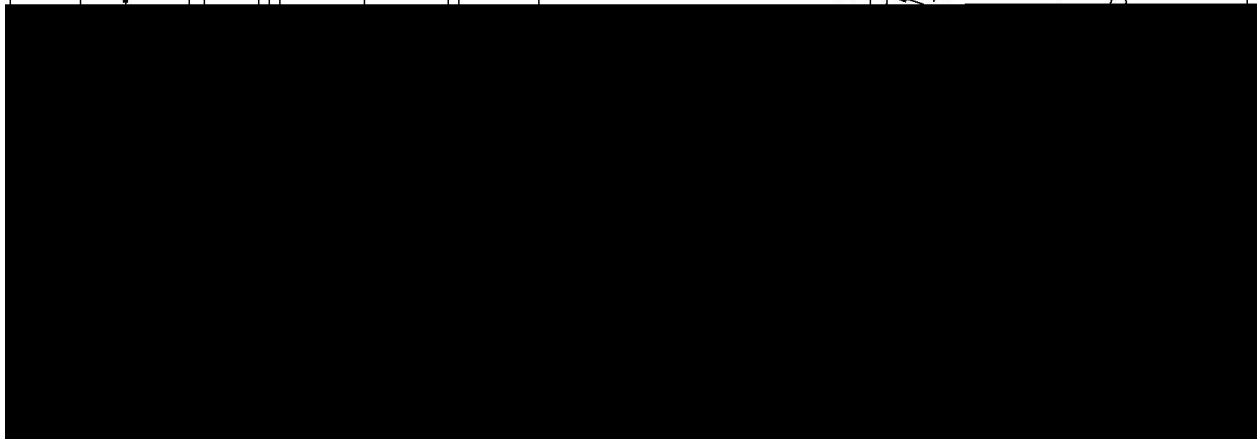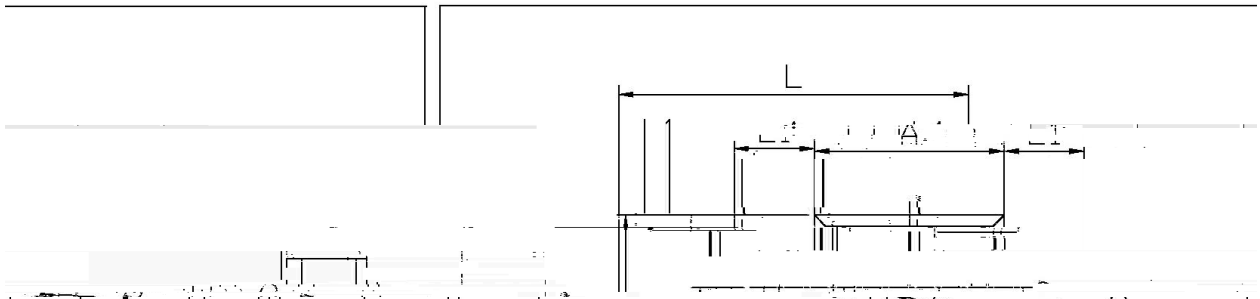



E H' ' + ' ' Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180℃, Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5℃, Duration:5±0.5sec. |
| 3 | | 2 | 10℃/sec. | | 3. Cooling Speed: 2~10℃/sec. |

' ' + ' ' , - 0/0<793- ' < 4' (4?1-2/9 : ') - 7< ' - 0< ' 491/</490'

260±5℃	10±1 sec.	Temp.:260±5℃	Time:10±1 sec
--------	-----------	--------------	---------------

' ' + ' ' A7387 : / 9 : ' (A * L'

/ REEL

(12.808())TJ ET. 13686.04 353.01 m3686.04 42629 I 53764 42629 封装形式 13764 353.01 I h W* n BT58.04 0 0580400 Tm /F8 1 Tf 0 0 0 sc 0 0 0 SC 0 Tr 013.47869.237