


Rev.A Sep.-2017

2A ABS/LBF
 2A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.


100V ~ 1000V 2.0A

Glass Passivated Chip Junction, Reverse Voltage :100 to 1000V, Forward Current: 2.0A, Fast reverse recovery time, Designed for Surface Mount Application. Halogen free product.

General purpose.



PIN	DESCRIPTION
1	Input Pin (..)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

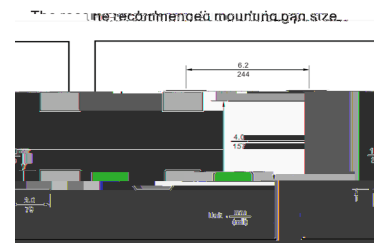


See Marking Instructions.


Rev.A Sep.-2017


Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

ABS/LBF

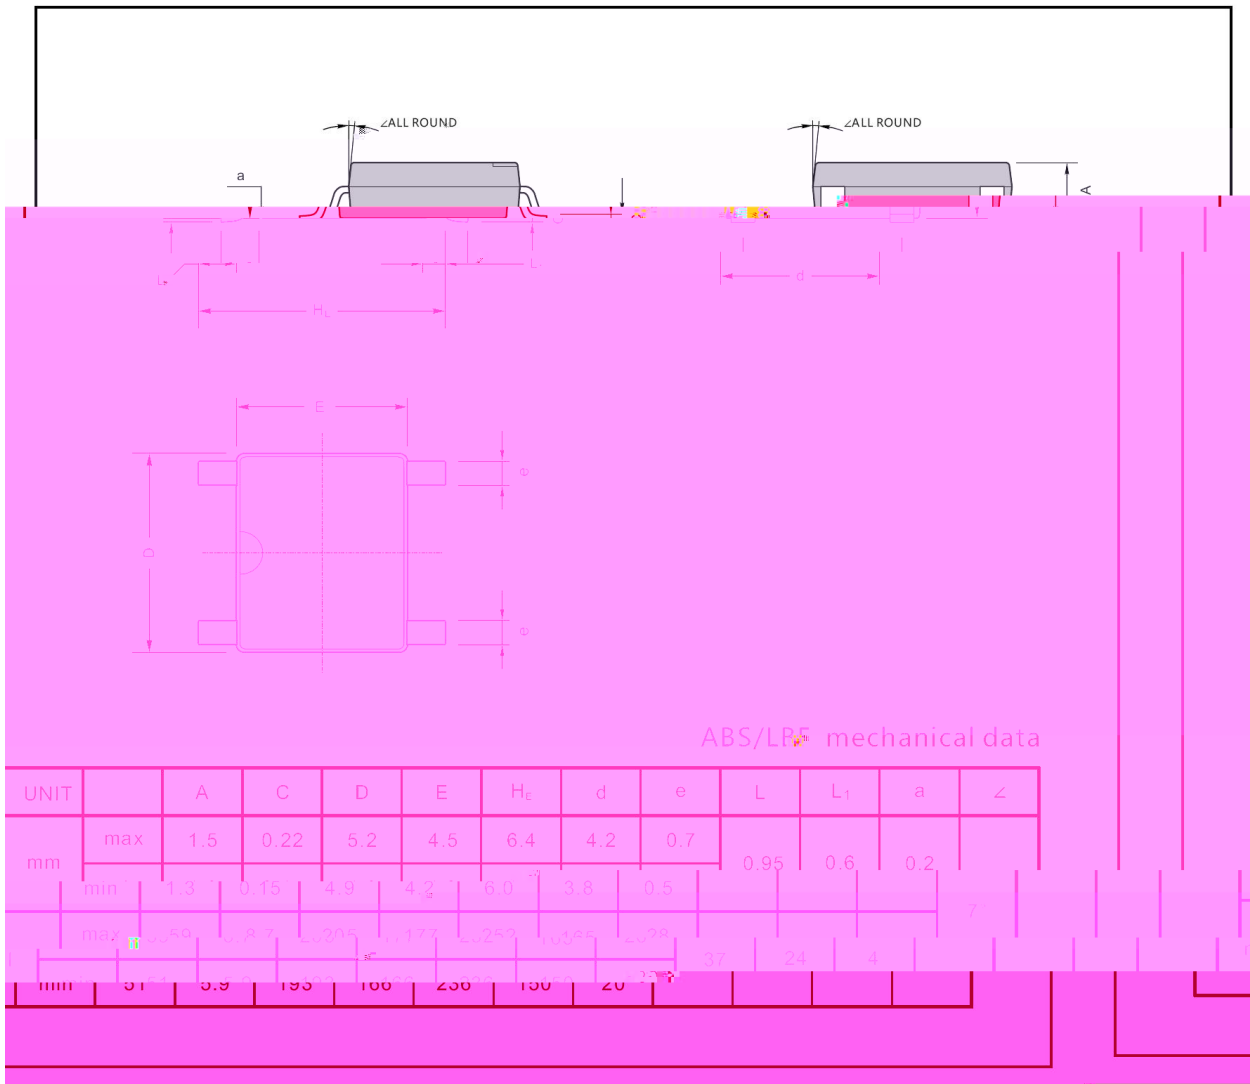

Marking

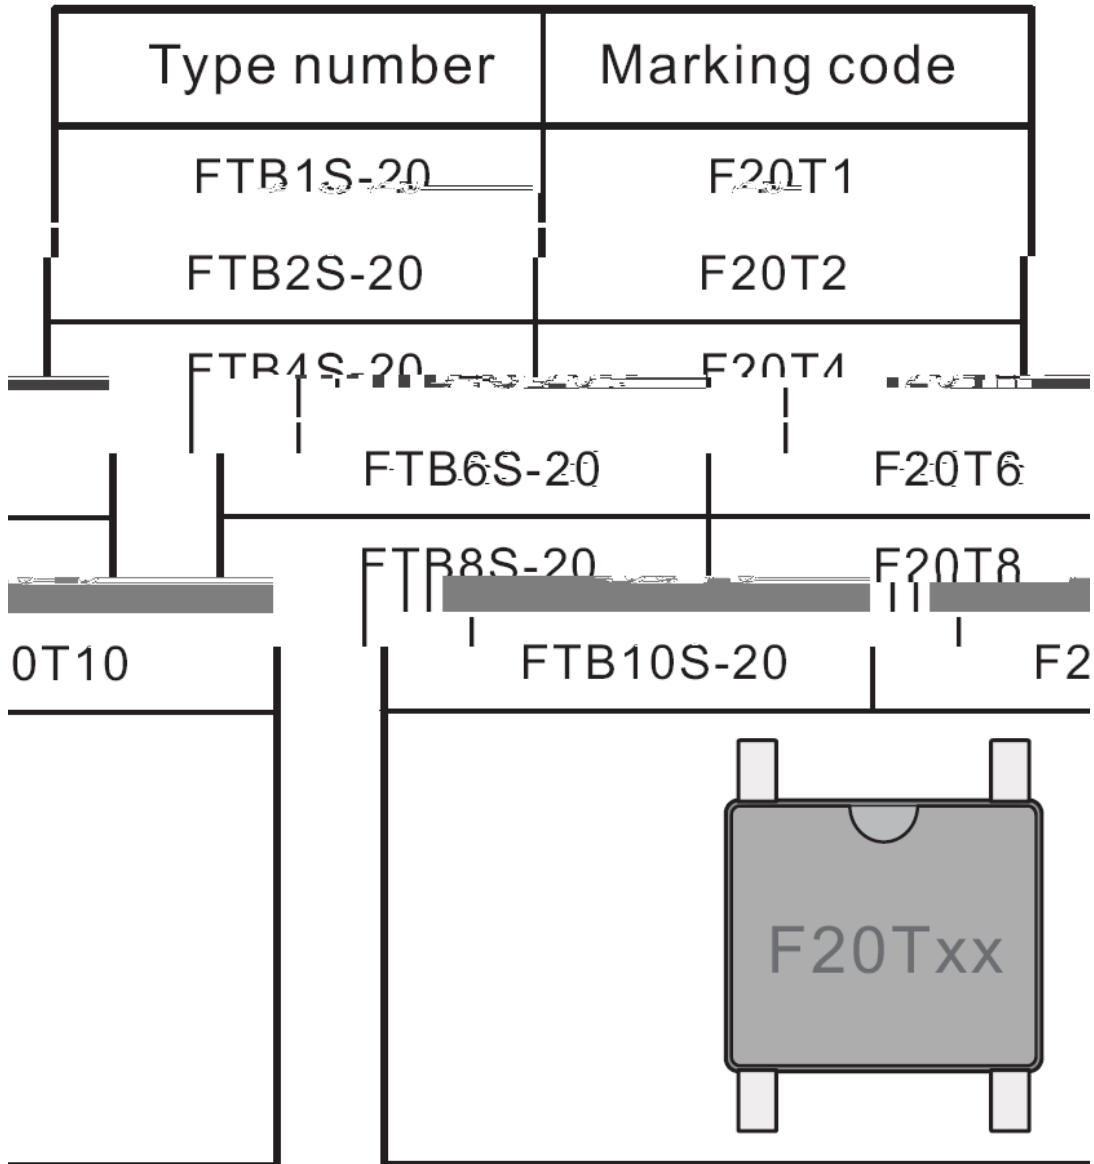

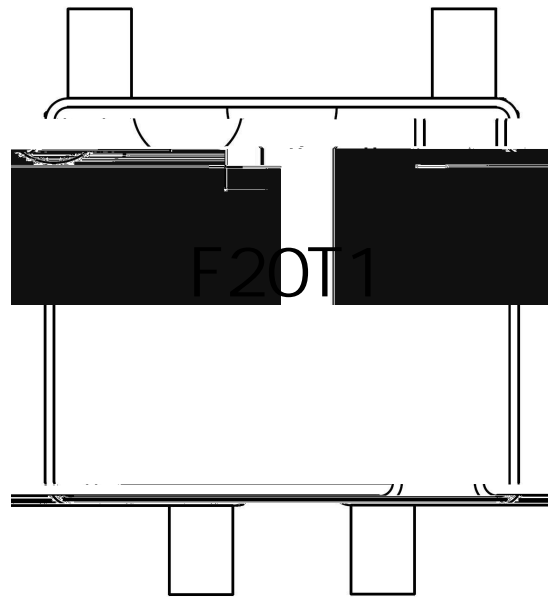

F20T1

1 *

3 *

Note:

F20T1 Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No
Code

