



Re e

50~1000V 20A GBJ

Glass Passivated Bridge Rectifiers, Reverse Voltage:50~1000V,Forward Current:20A,GBJ package.

PCB

UL

94V-0

Ideal for printed circuit board, Case material molded plastic, The plastic material has U/L flammability classification 94V-0. Halogen free product.

General purpose.


//




//

//V// ; 0)607# / fi % > #3 & % * 3 & /

GBJ Package Outline Dimensions

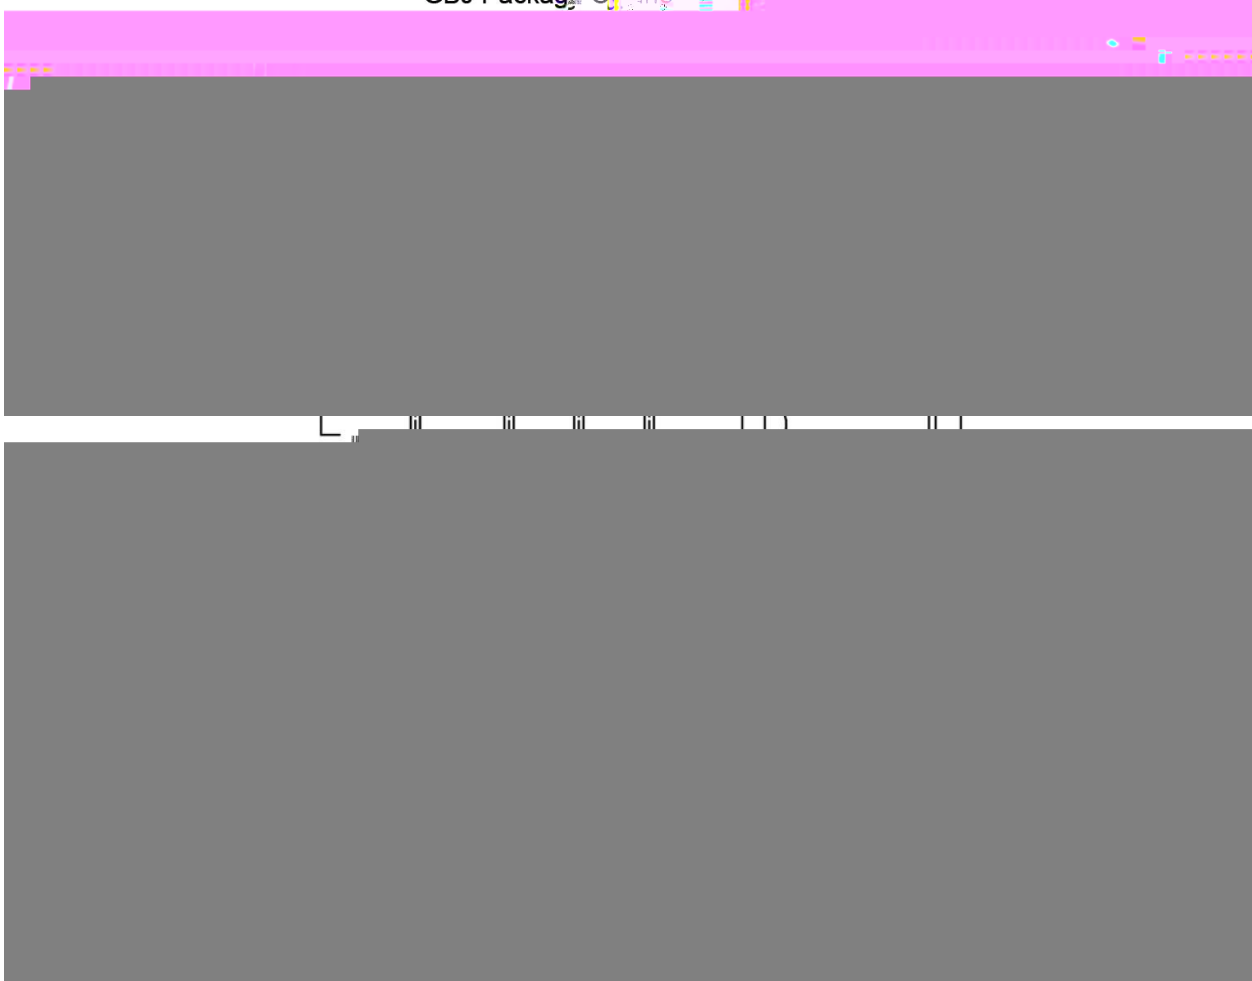

//V/ 50(6%37/03&2(9)2%*3&/

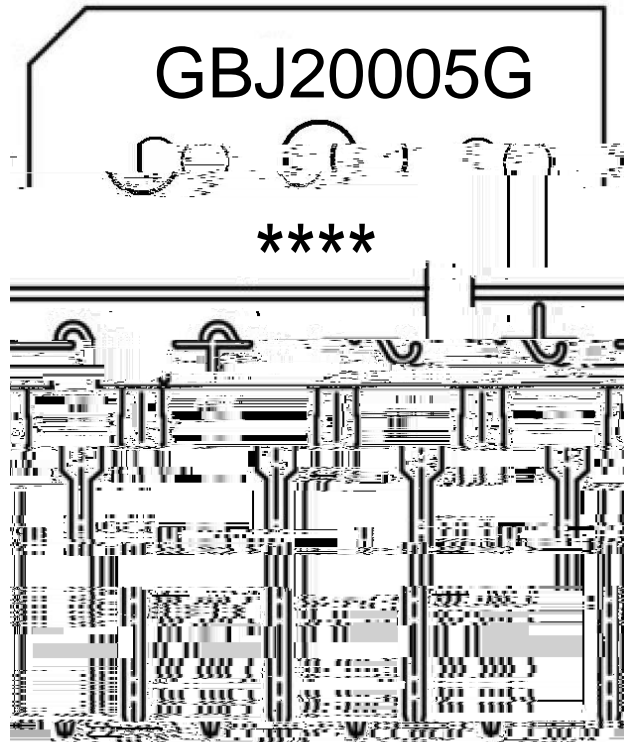



GBJ20005G

Note:

GBJ20005G: Product Type.

****: Lot No. Code, code change with Lot No.

1. Preheating: 25~150 , Time: 60~90sec.

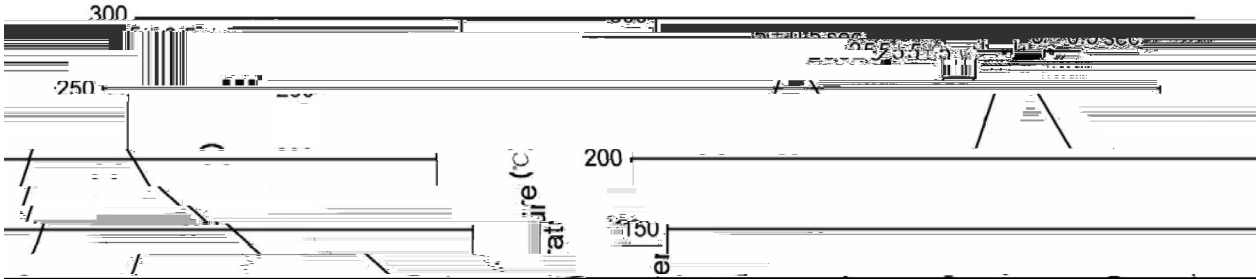

Note:

- 1. Preheating: 25~150 , Time: 60~90sec.
- 2. Peak Temp.: 255±5 , Duration: 5± 0.5sec.
- 3. Cooling Speed: 2~10 /sec.

2. Peak Temp.: 270±5 , Duration: 10± 1 sec.

Temp.: 270±5 Time: 10±1 sec

3. Cooling Speed: 2~10 /sec.

/ BULK

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: mm ³) | | |
|----------------------|----------------|---------------------|----------------------|----------------------------|----------------------|---|-------------|-------------|
| | Units/Bag / | Bags/Inner Box / | Units/Inner Box / | Inner Boxes/Outer Box / | Units/Outer Box / | Bag 袋 | Inner Box 盒 | Outer Box 箱 |
| GBJ | - | - | | | | | | |

/ TUBE

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: mm ³) | | |
|----------------------|-----------------|----------------------|----------------------|----------------------------|----------------------|---|--------------|---------------|
| | Units/Tube / | Tubes/Inner Box / | Units/Inner Box / | Inner Boxes/Outer Box / | Units/Outer Box / | Tube 套管 | Inner Box 盒 | Outer Box 箱 |
| GBJ | / | / | 200 | 10 | 2000 | / | 306*108*42mm | 322*246*252mm |

/ G*2%)#&