


KSA928T
Rev.E Mar.-2016


SOT-89 PNP Silicon PNP transistor in a SOT-89 Plastic Package.

KSC2328T
Complementary pair with KSC2328T.



Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-30	V
Collector to Emitter Voltage	V_{CEO}	-30	V
Emitter to Base Voltage	V_{EBO}	-5	V


/ Electrical Characteristic Curve

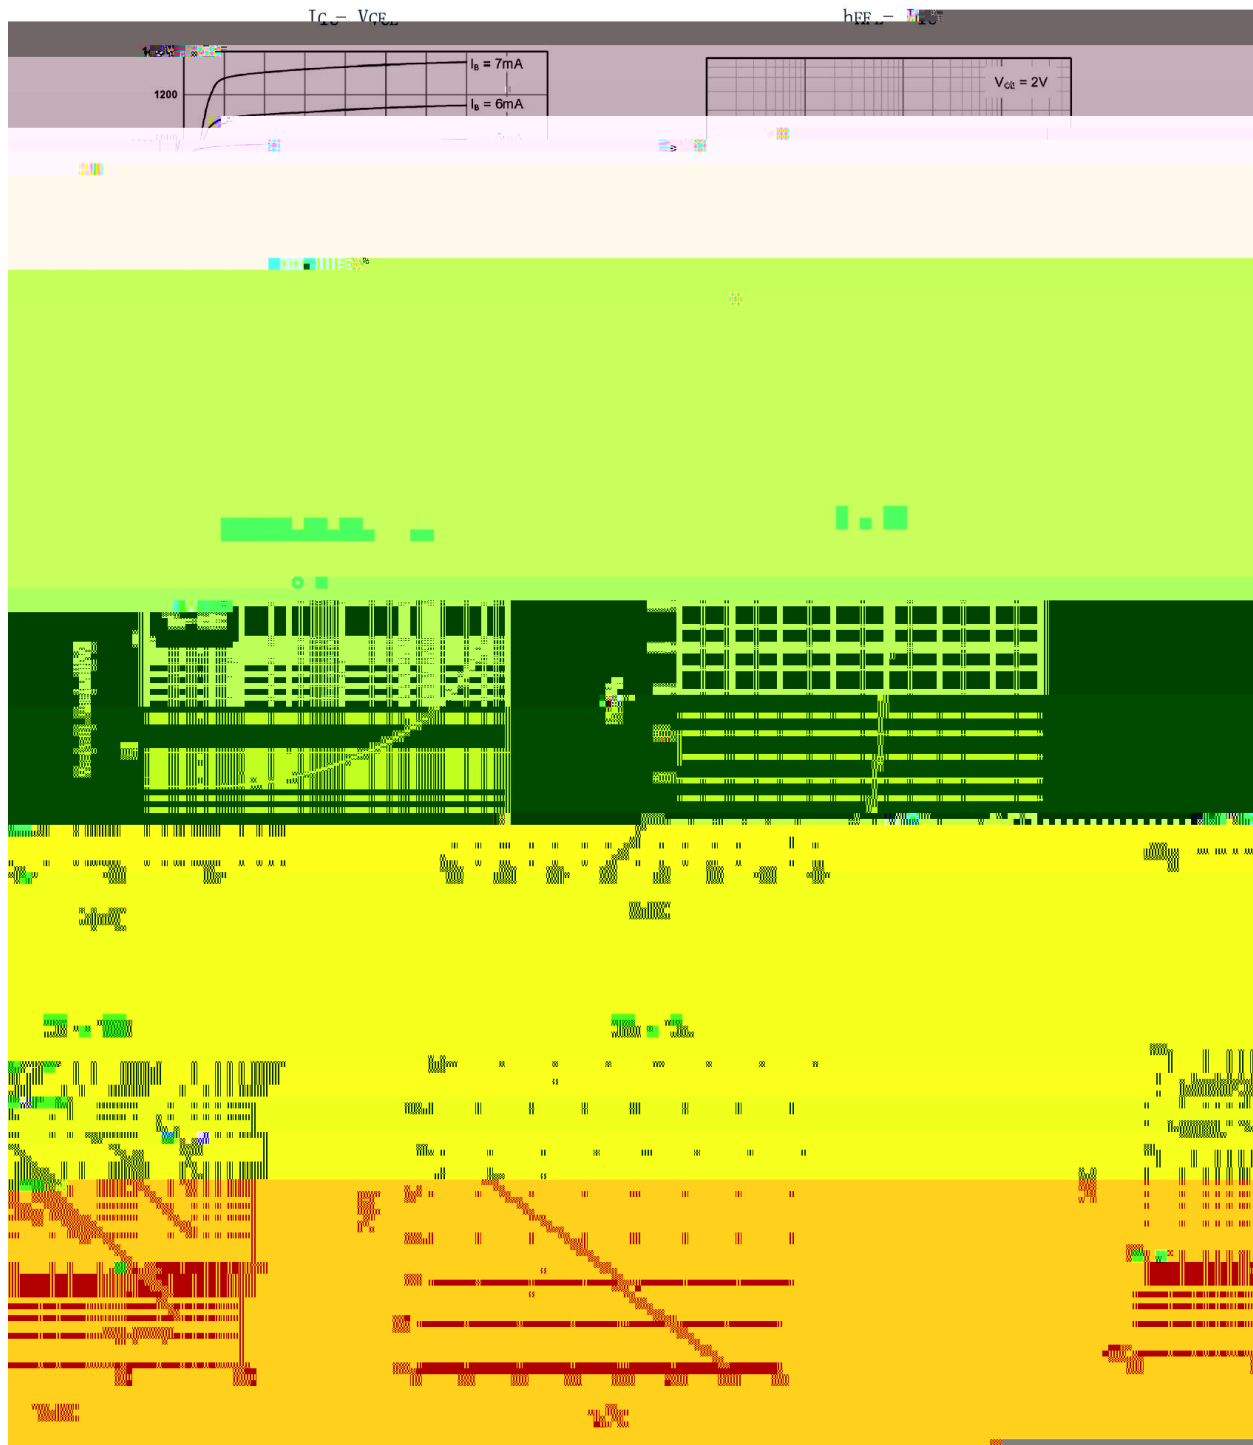


/ Package Dimensions

SOT-89

单位: mm

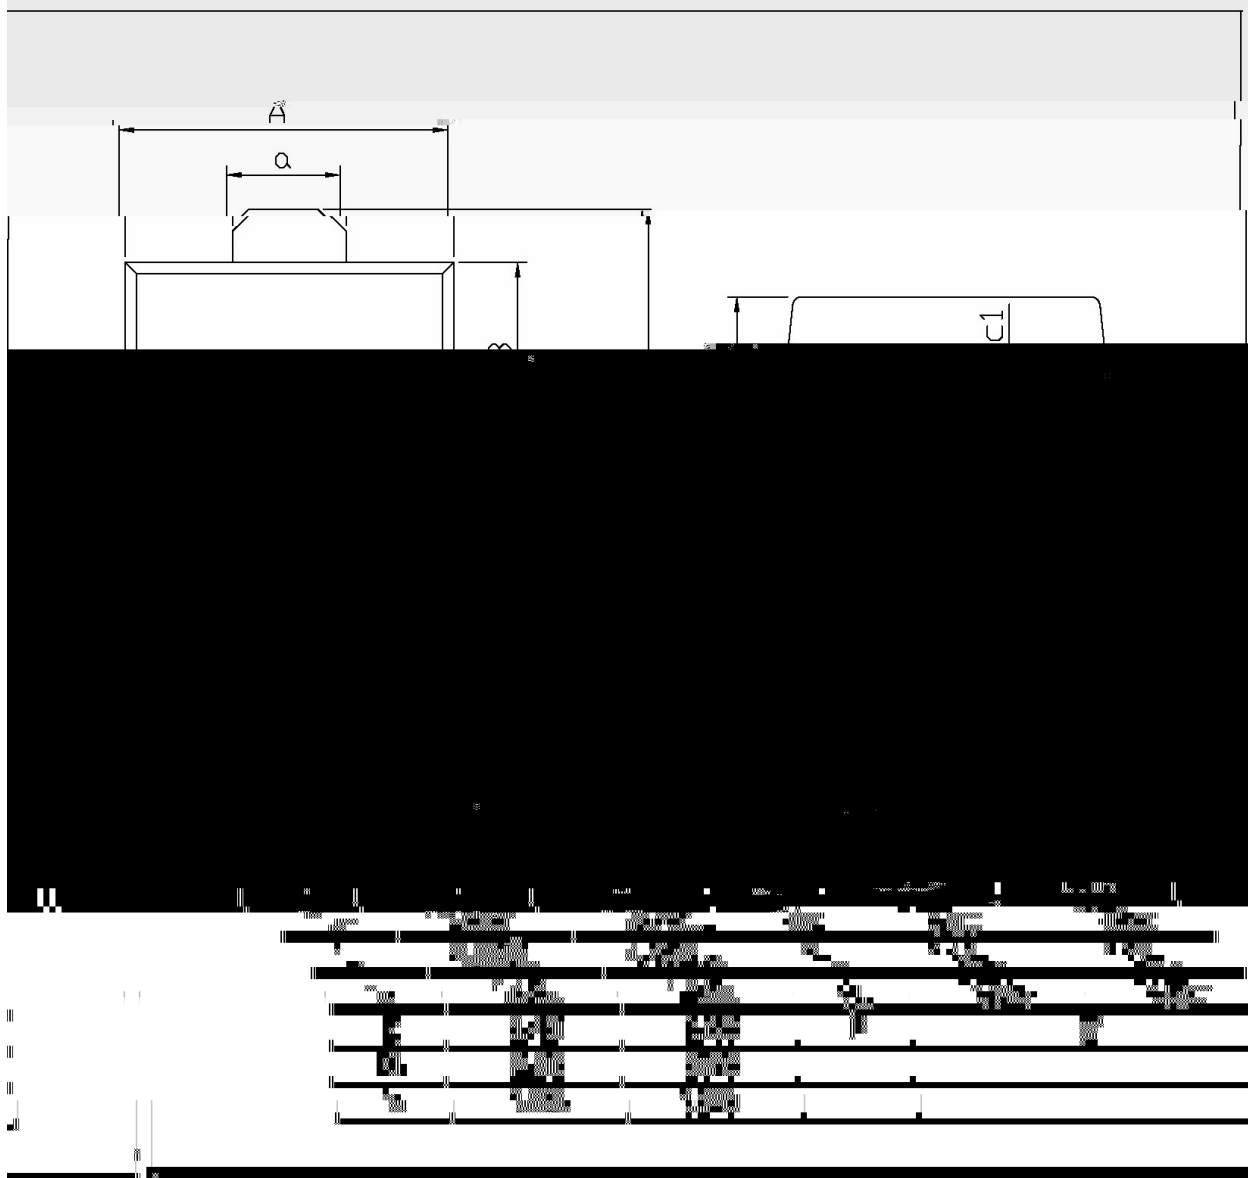

() / K\ d g\ i Xk i \ 'Gif] \ d] fi @ ' I \] dn ' Jf d \ i e ^ Ž G Y \$ = i \ \ ž

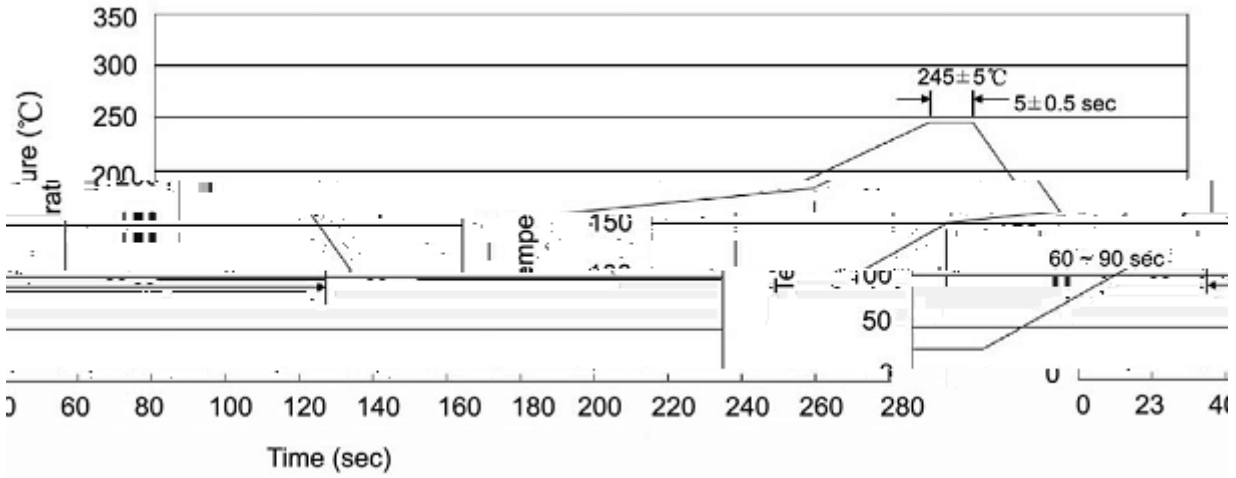

Note:

- | | | | | | |
|---|-------|-----|----|-----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. |