




/ Absolute Maximum Ratings(Ta=25)


| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

/ Electrical Characteristics(Ta=25)


| | | | | | | |
|--|--|---|--|--|--|---|
| | | | | | | |
| | | μ | | | | |
| | | | | | | |
| | | μ | | | | |
| | | | | | | μ |
| | | | | | | μ |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

/ Electrical Characteristic Curve

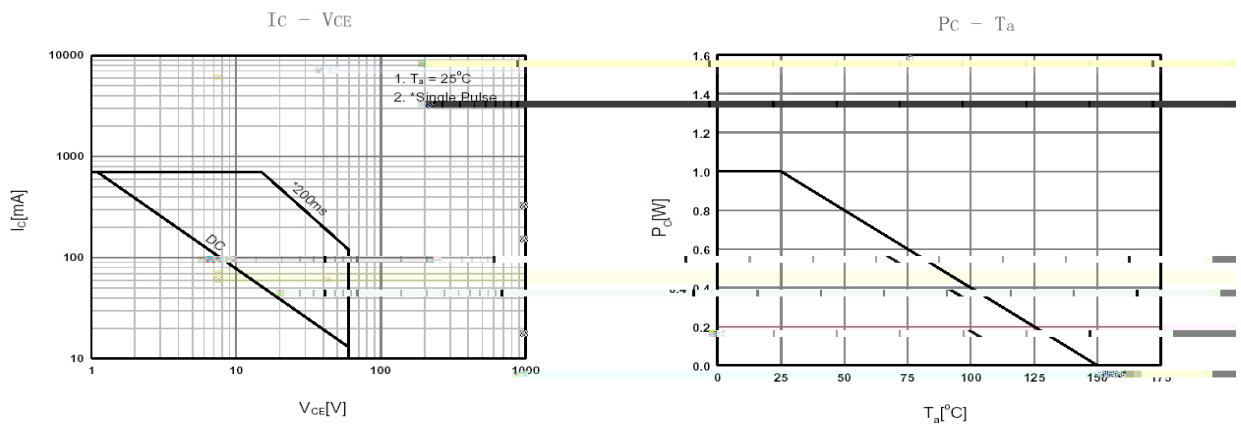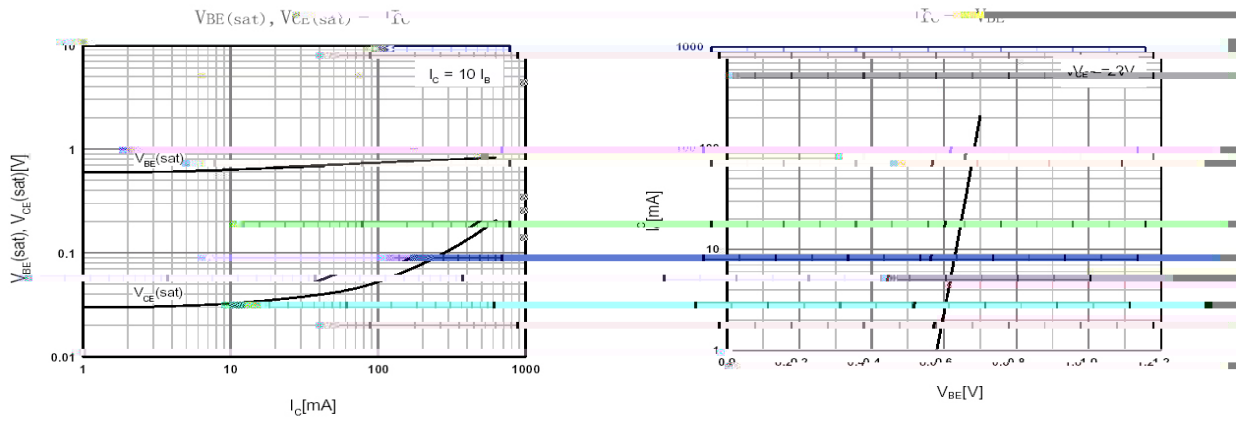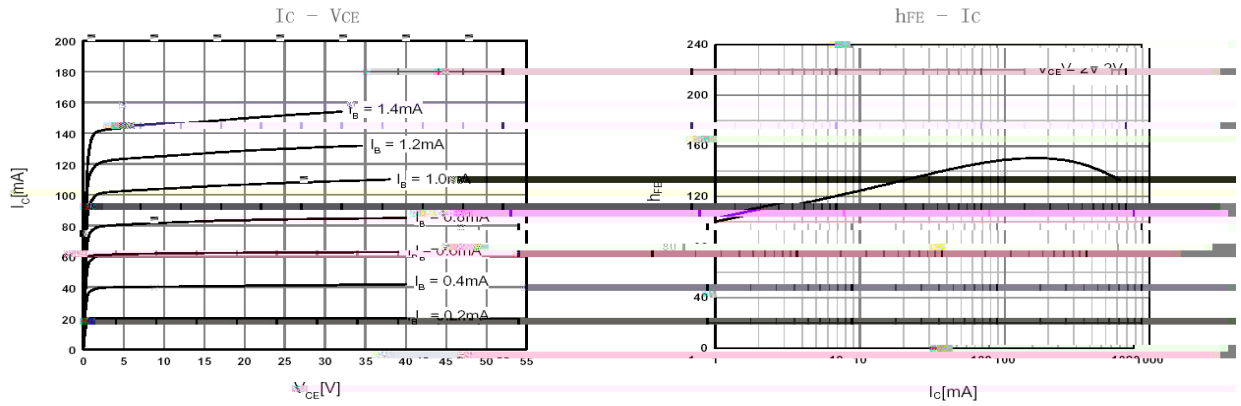

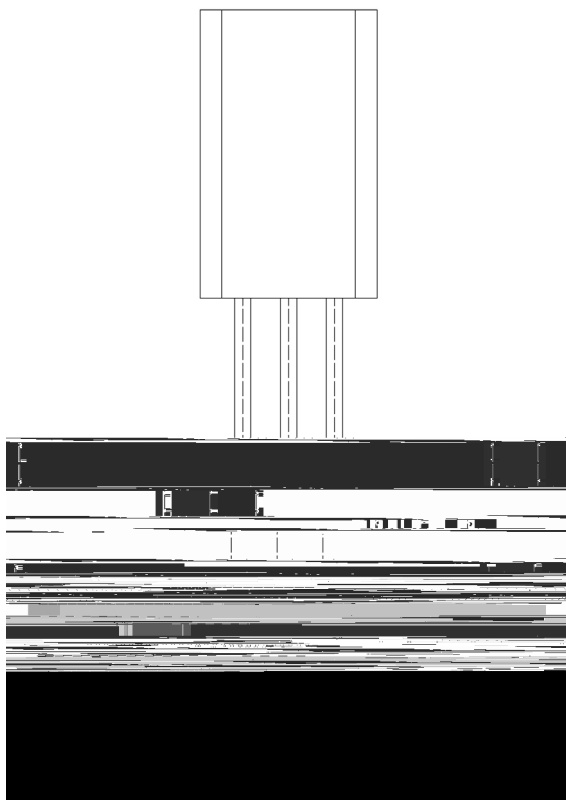

() / Temperature Profile for Dip Soldering(Pb-Free)

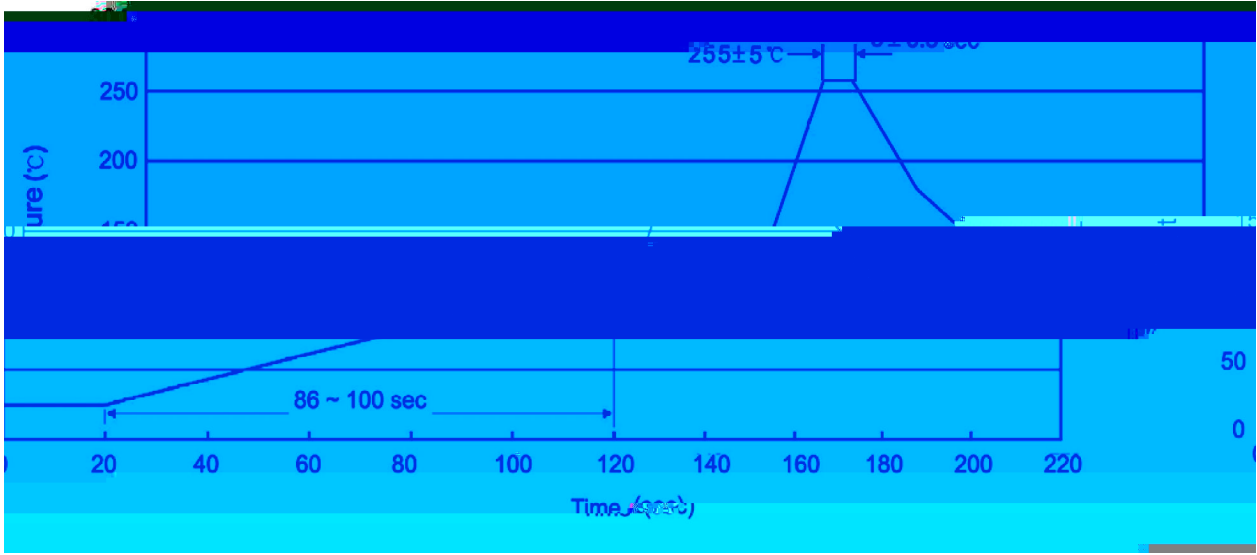

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

| | Units/Bag / | Bags/Inner Box / | Units/Inner Box / | Inner Boxes/Outer Box / | Units/Outer Box / | Bag | Inner Box | Outer Box |
|---------|----------------|---------------------|----------------------|----------------------------|----------------------|---------|-------------|-------------|
| TO-92LM | 1,000 | 8 | 8,000 | 5 | 40,000 | 135×190 | 237×172×102 | 560×245×195 |

| | Units/tape / | Tape/Inner Box / | Rows/Inner Box / | Inner Boxes/Outer Box / | Units/Outer Box / | Inner Box | Outer Box |
|---------|-----------------|---------------------|---------------------|----------------------------|----------------------|------------|----------------------------|
| TO-92LM | 2,500 | 1 | 100 | 10 | 25,000 | 328×230×42 | 480×346×235 547×407×268 |

/ Notices