


Rev.F May.-2016

KF \$) - \*

Schottky Diode in a TO-263 Plastic Package.

Low forward voltage drop, low power losses, High efficiency operation.

For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.









PIN1 Anode


PIN 2 4 Cathode

PIN 3 Anode

See Marking Instructions.



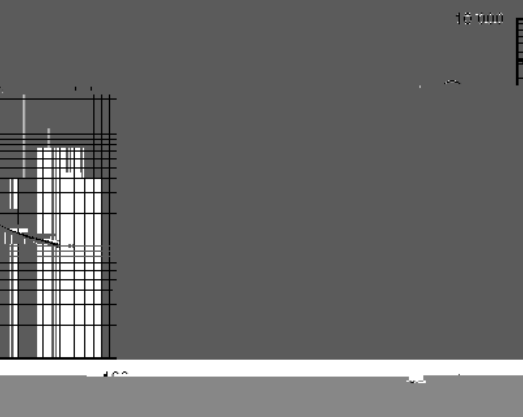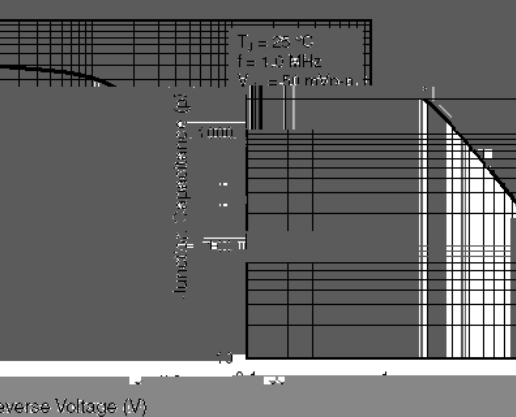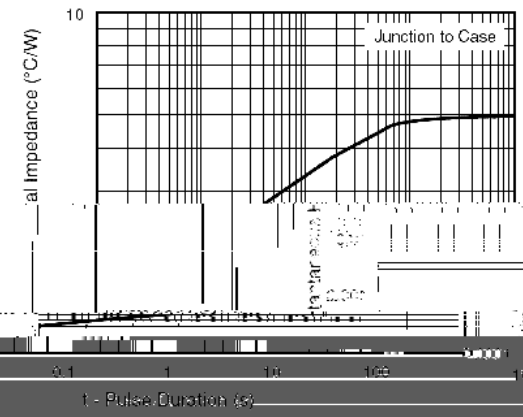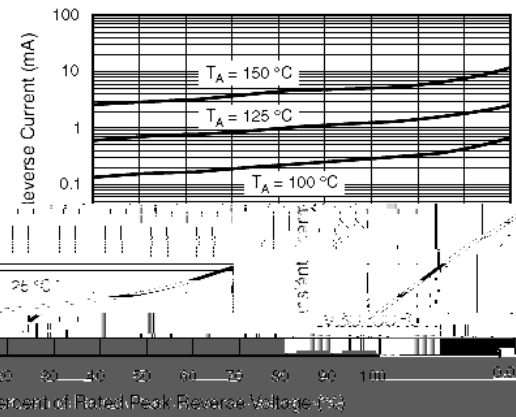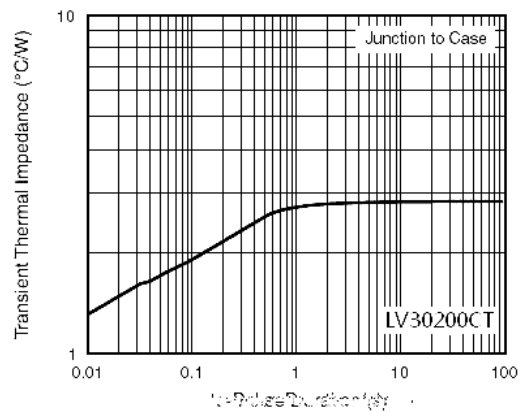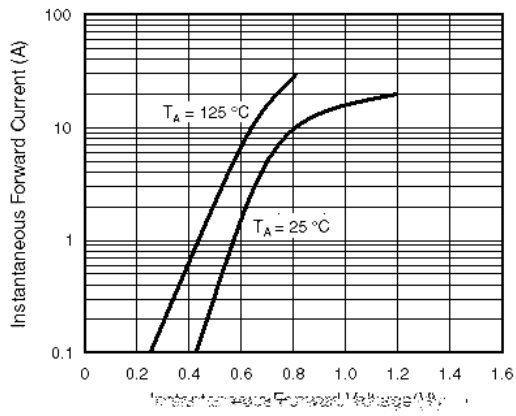

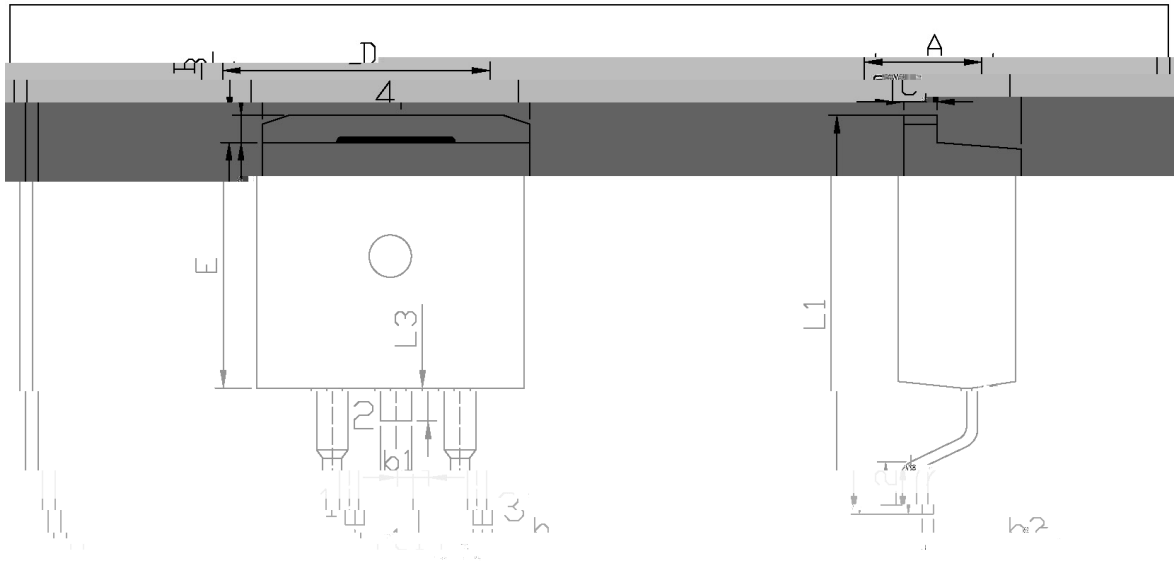

单位: mm

Max	Min	Max	Min
9.40	A 4.30	4.70	E 9.00
2.74	B 1.00	1.40	e1 2.34
16.00	b1 1.15	1.35	L1 1.5

