

/ Descriptions

TO-220F

Schottky Barrier Diode in a TO-220F Plastic Package.

/ Features

Low forward voltage drop, low power losses, High efficiency operation.


/ Applications

OR-ing


DC-DC

For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.

/ Equivalent Circuit



/ Pinning



PIN1 Anode

PIN 2 Cathode

PIN 3 Anode

/ h_{FE} Classifications & Marking


See Marking Instructions.

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------


/ Electrical Characteristic Curve



/ Package Dimensions

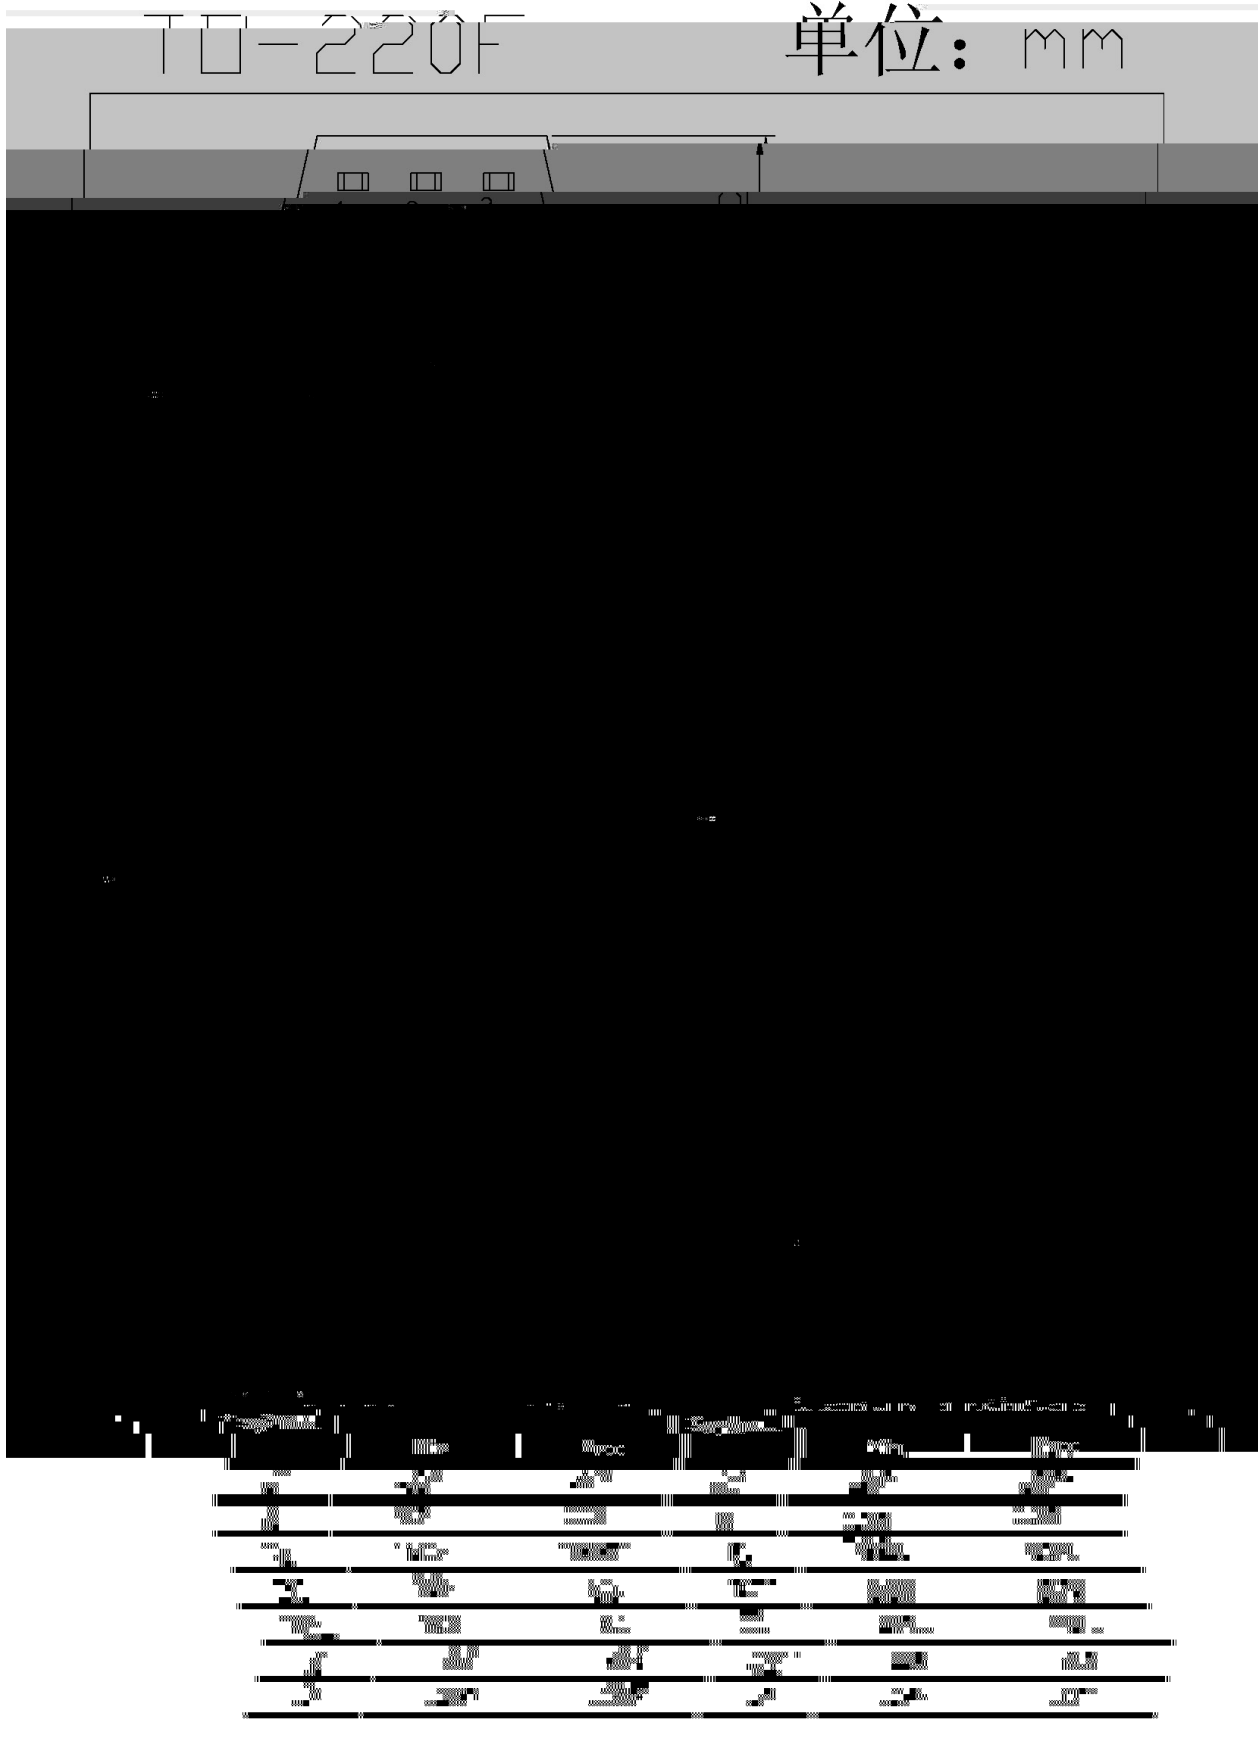

/ Marking Instructions

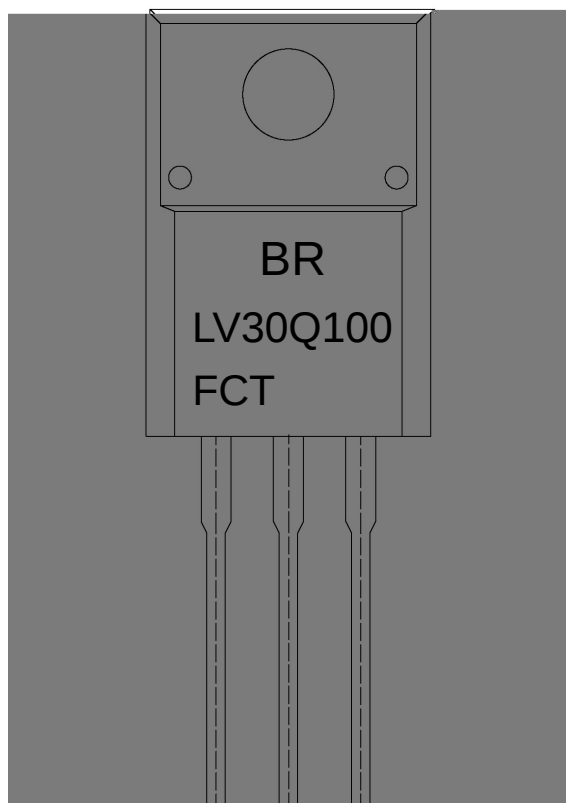

BR

LV30Q100

CT:

F:

Note:


BR: Company Code

LV30Q100: Product Type.

CT: Internal Structure

F: Package Code

****: Lot No. Code, code change with Lot No.

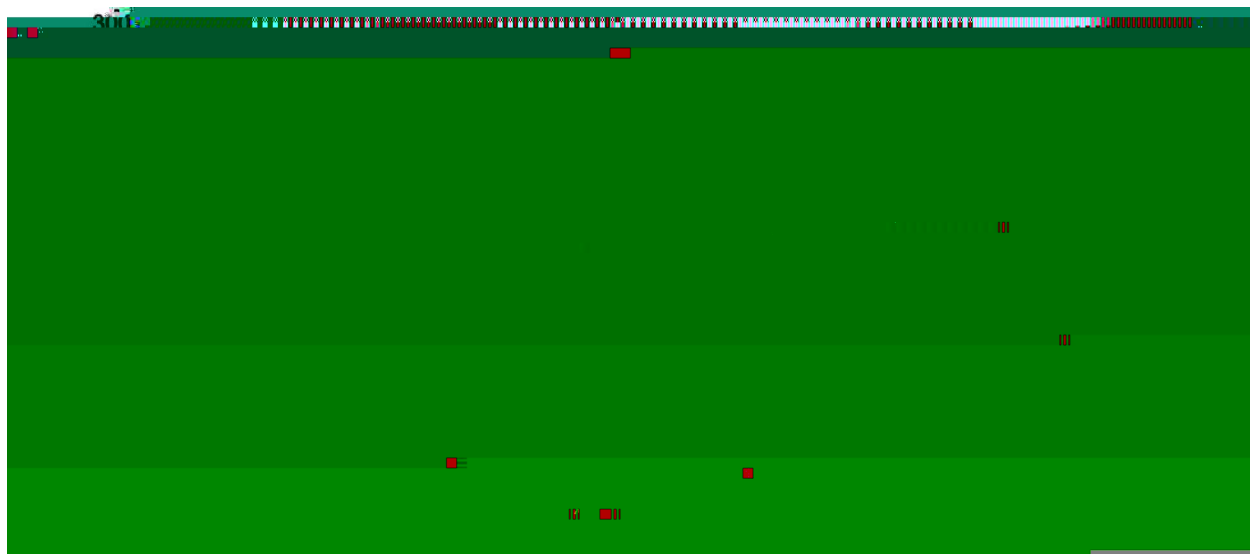
() / Temperature Profile for Dip Soldering(Pb-Free)


Note:

- 1 25 150 60 90sec;
- 2 255±5 5±0.5sec;
- 3 2 10 /sec.

- 1.Preheating:25~150 , Time:60~90sec.
- 2.Peak Temp.:255±5 , Duration:5±0.5sec.
3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm ³)		

/ TUBE

Package Type	Units					Dimension (unit mm ³)		

/ Notices