

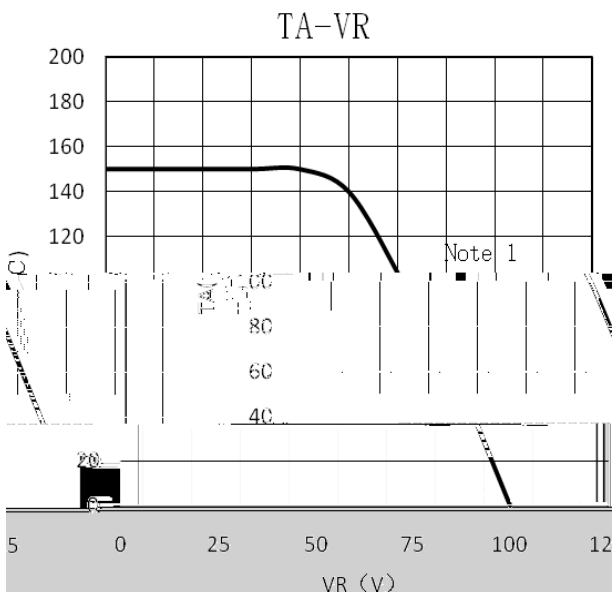
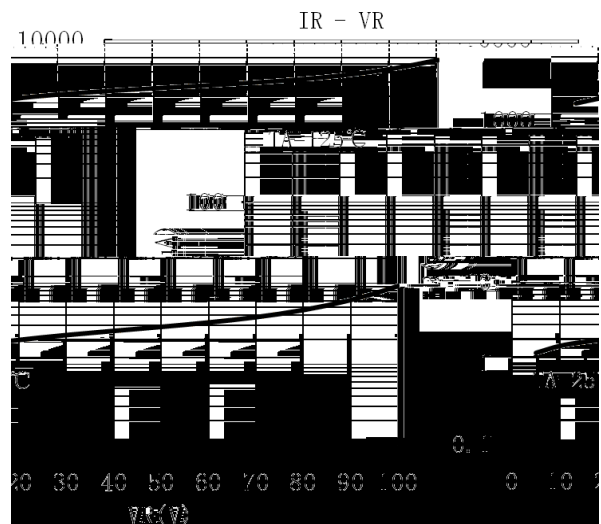
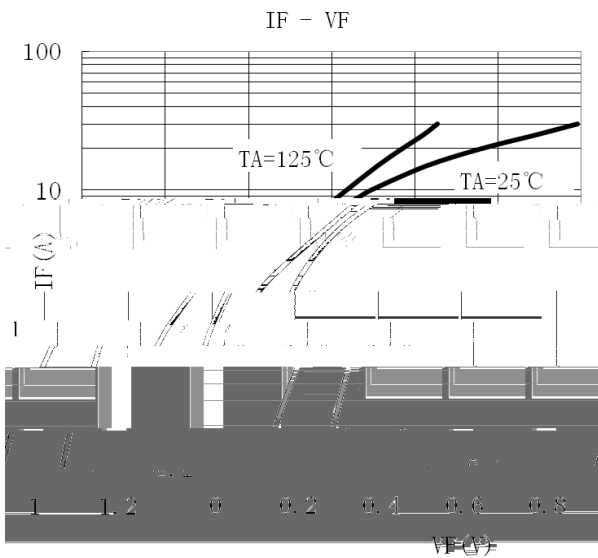
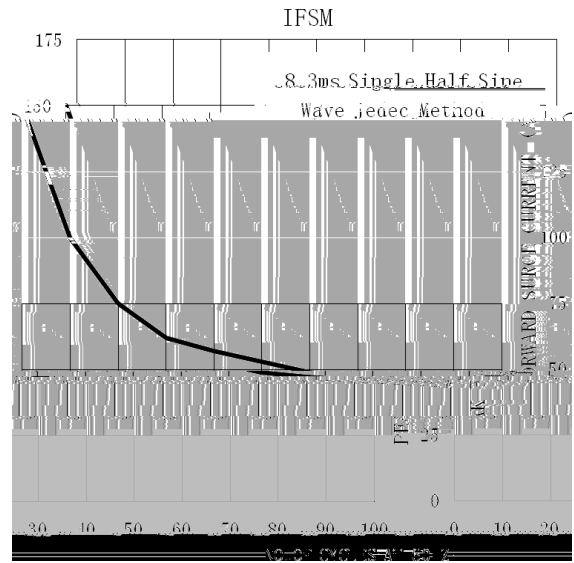


Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage			
Working Peak Reverse Voltage			
DC Blocking Voltage			


/ Electrical Characteristic Curve

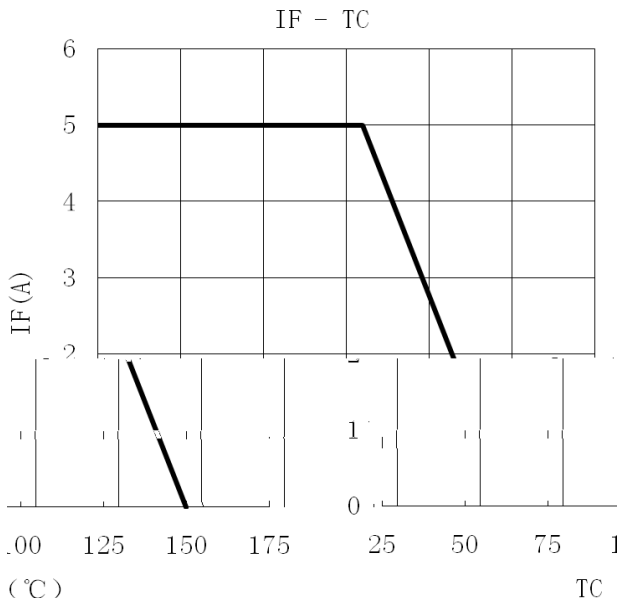

/ Package Dimensions

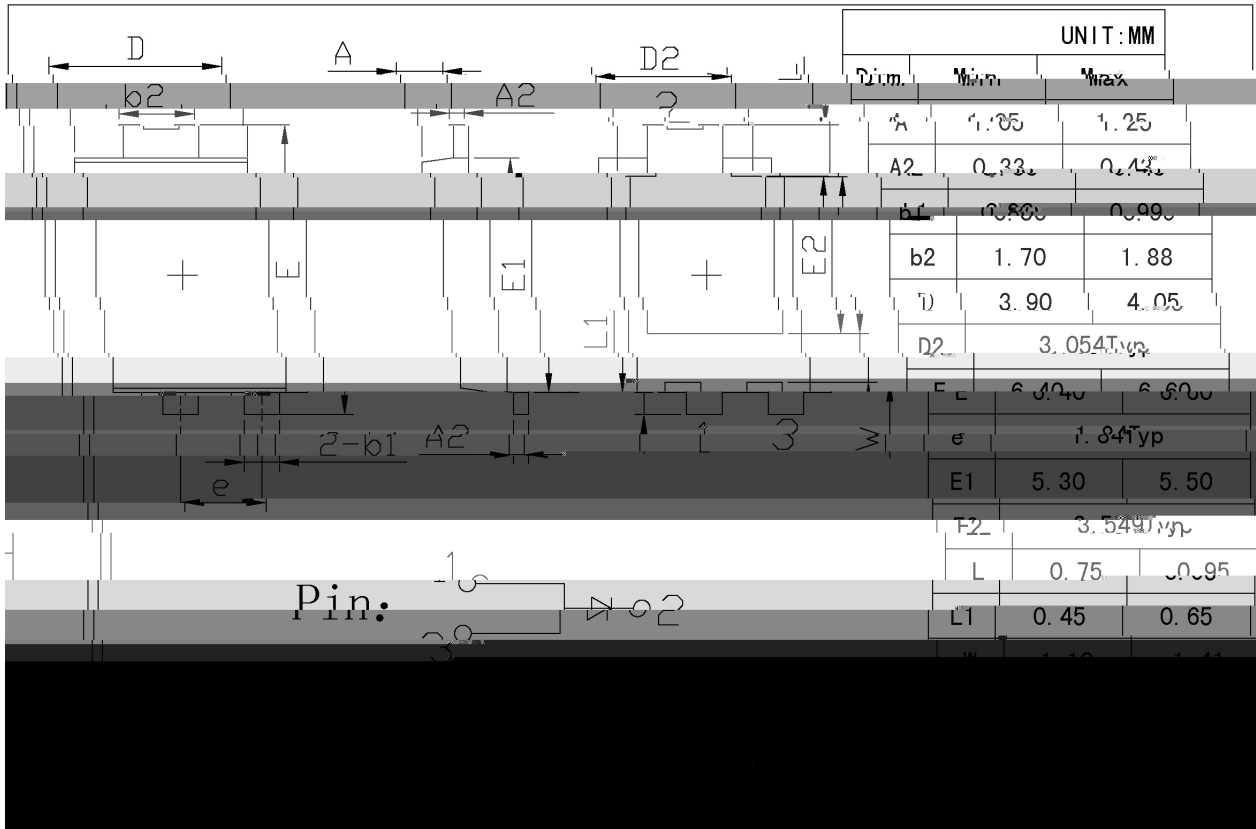

() / K\d g\iXk i\`Gif]`d`]fi`@`I`]\fn`Jfd` \i`e`^ZGYS=i\`z

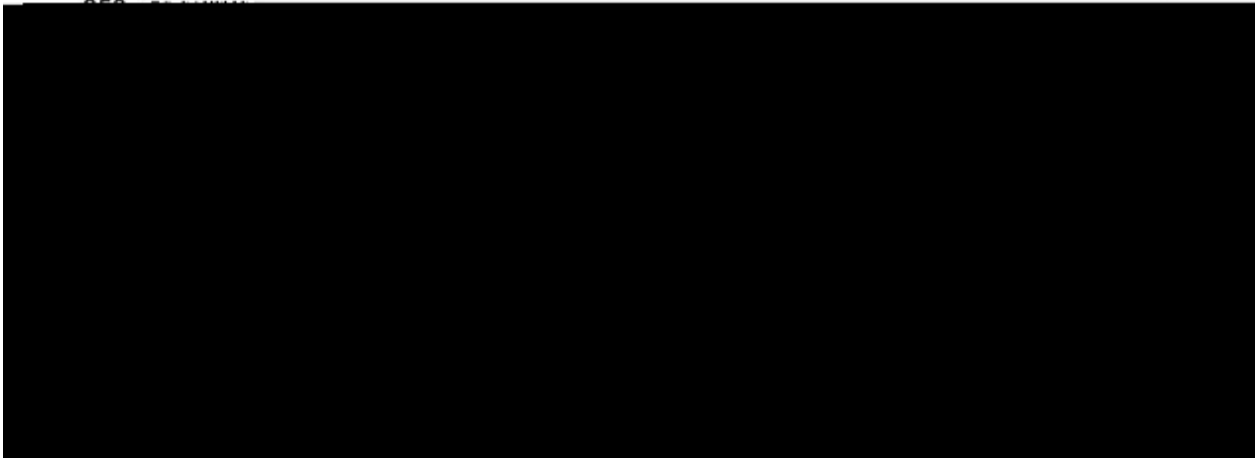

				Note:	
1	25	150	60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2	245	5	5	0.5sec;	2.Peak Temp.:245 5 , Duration:5 0.5sec.
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units			Dimension	(unit mm ³)
	Units/Reel	Reels/Inner Box	Units/Inner Box		