



		~ · ° / fi	· ° fl Ł † Ž	ž !	" #
A	2018-10-19		\$ %! &	' ()	

B 2021-

Rev.B Jun.-2021




Rev.B Jun.-2021

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	2000	V
Maximum Average Forward Rectified Current at $T_C = 100\text{ }^\circ\text{C}$	$I_{F\ AV}$	1.0	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load(JEDEC Method)	I_{FSM}	30 MtLeg a° mpx	A s
Typical Junction Capacitance ¹⁾	C_j	20	pF
Typical Thermal Resistance ²⁾	R_{JA}	95	$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_j, T_{stg}	-55~+150	$^\circ\text{C}$



\$, - 1 2 3


Fig.1 Forward Current Derating Curve Fig.2 Typical Reverse Characteristics

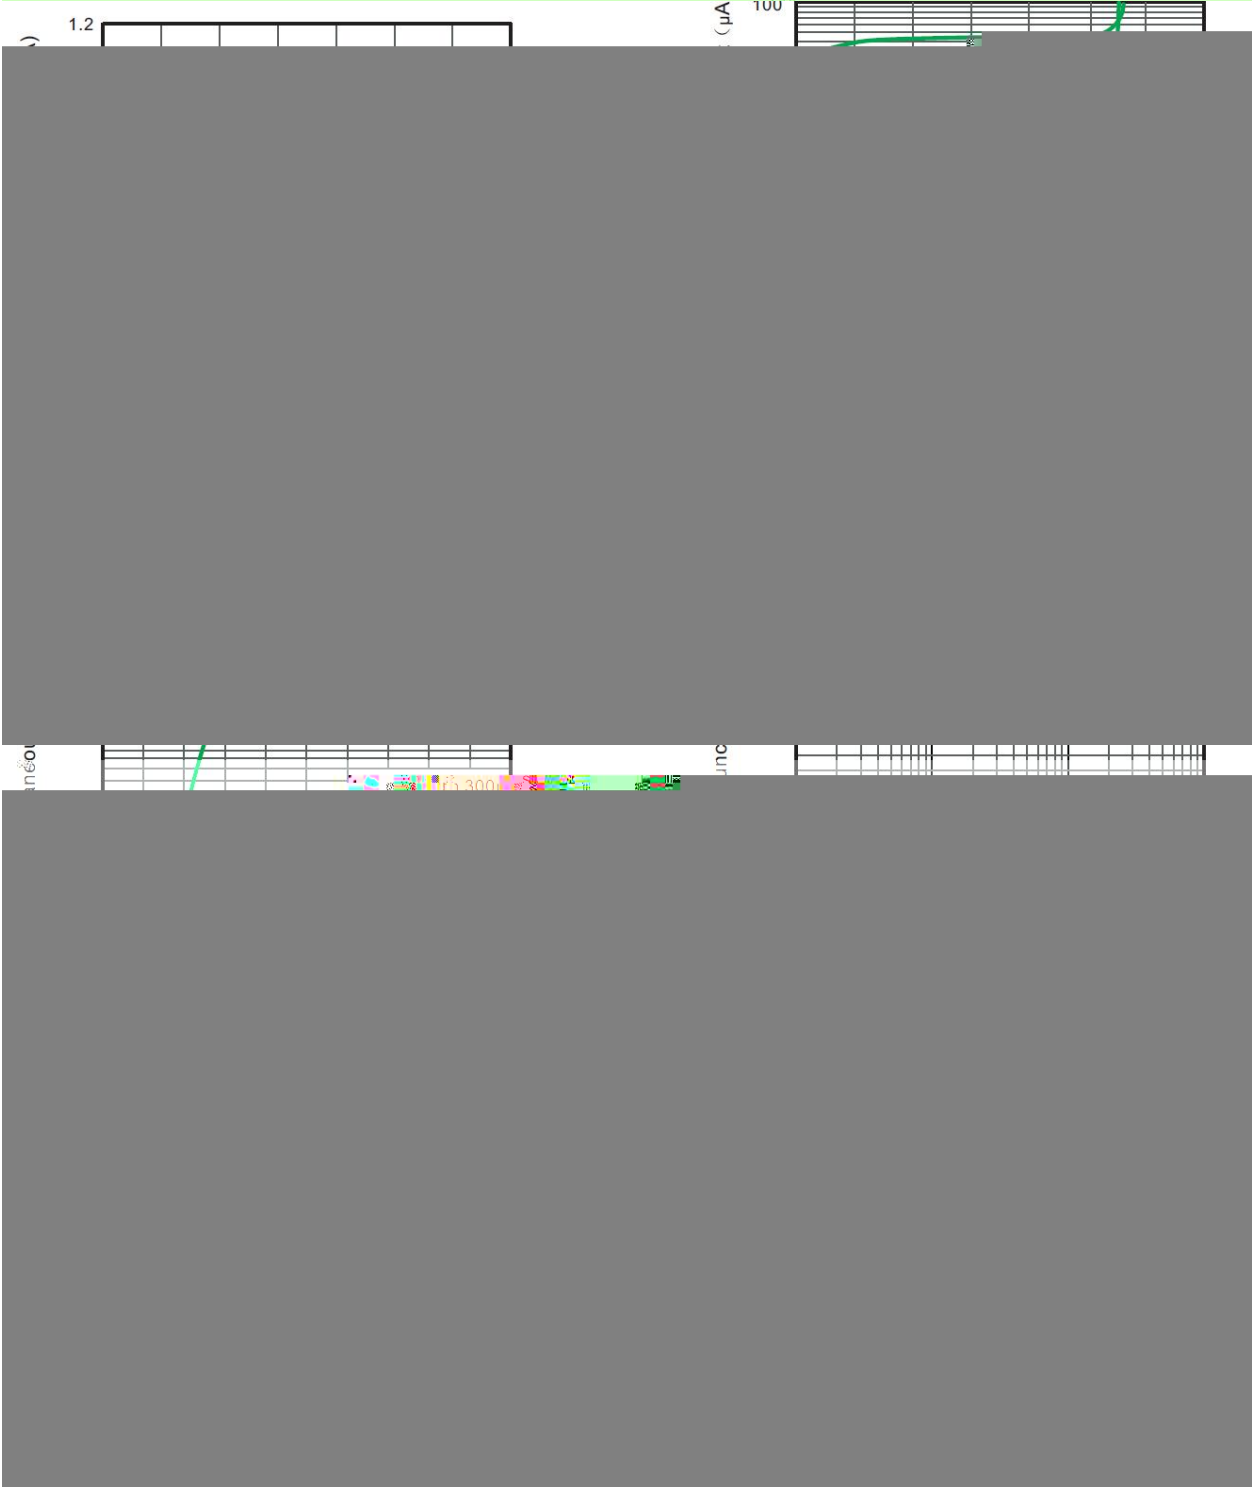



4 5 6 7 3


SMA

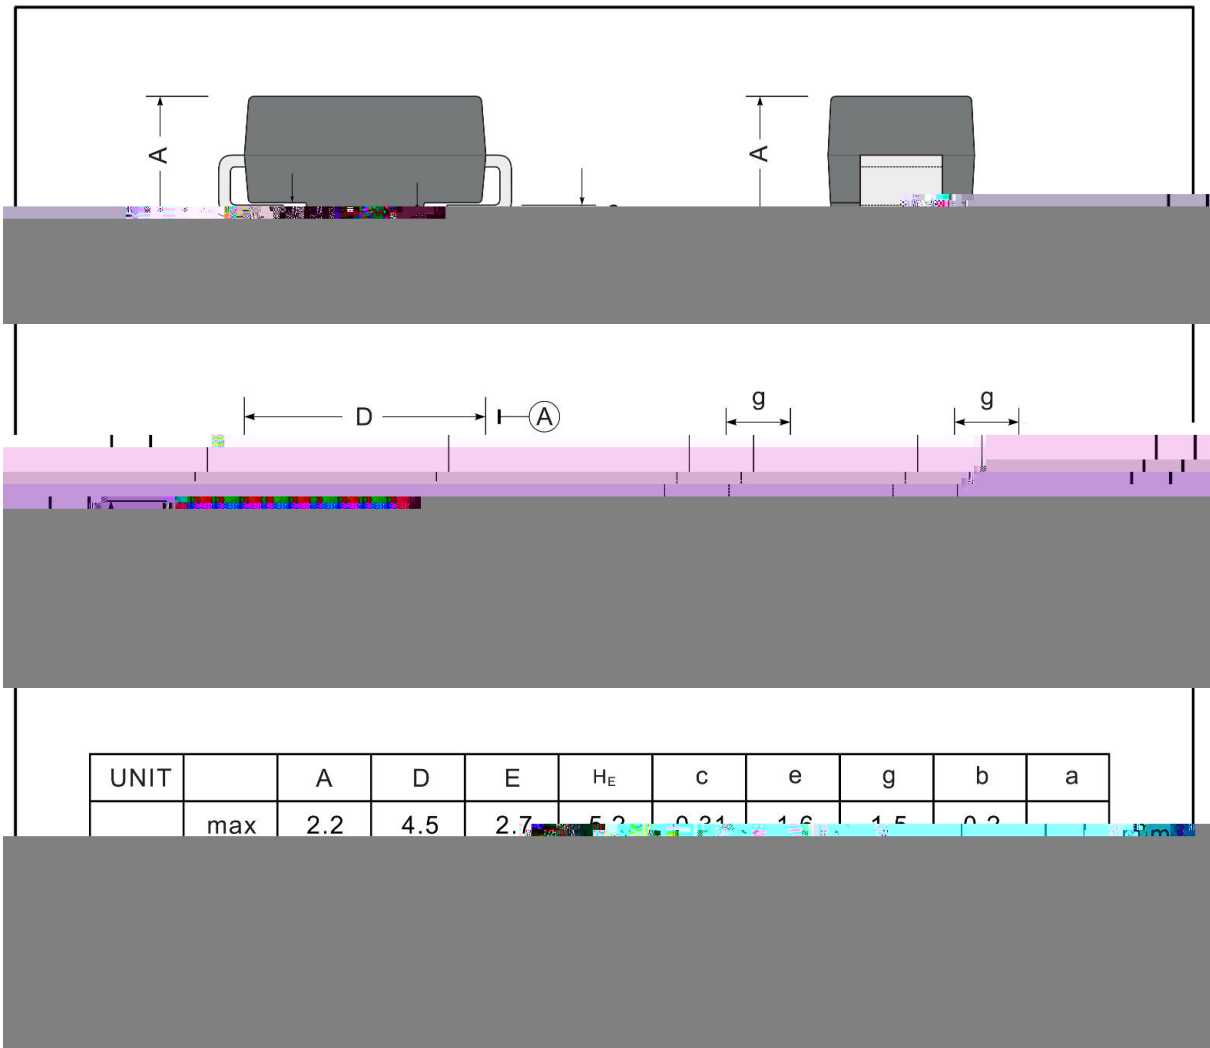

UNIT		A	D	E	H_E	c	e	g	b	a
	max	2.2	4.5	2.7	5.2	0.21	1.6	1.5	0.2	0.1



89

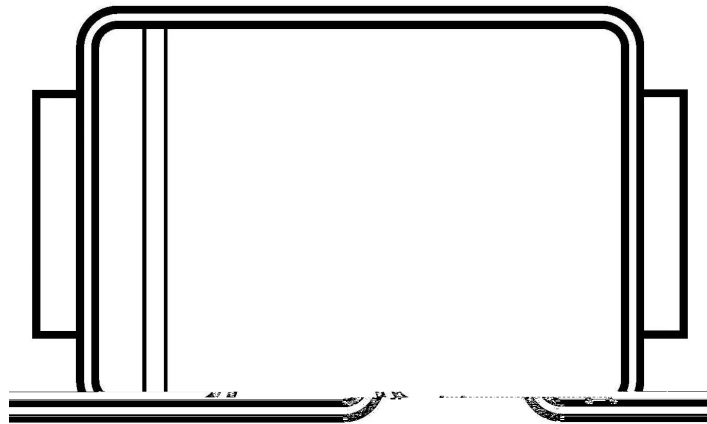

M20A

1 : 3 :

Note:

M20A Product Type Code

Lot No. Code The 1st : means:YM Code The last 3 : ;means:little Lot No Code



EdCA ? @ 1 2 3 A B CDE F DGH I J K L M N O P Q R S T U V W X Y Z [\]

- | | | | |
|---|---------|-----------|--|
| 1 | 150 180 | 60 90sec; | Note:
1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245 5 | 5 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |