


/ Electrical Characteristic Curve

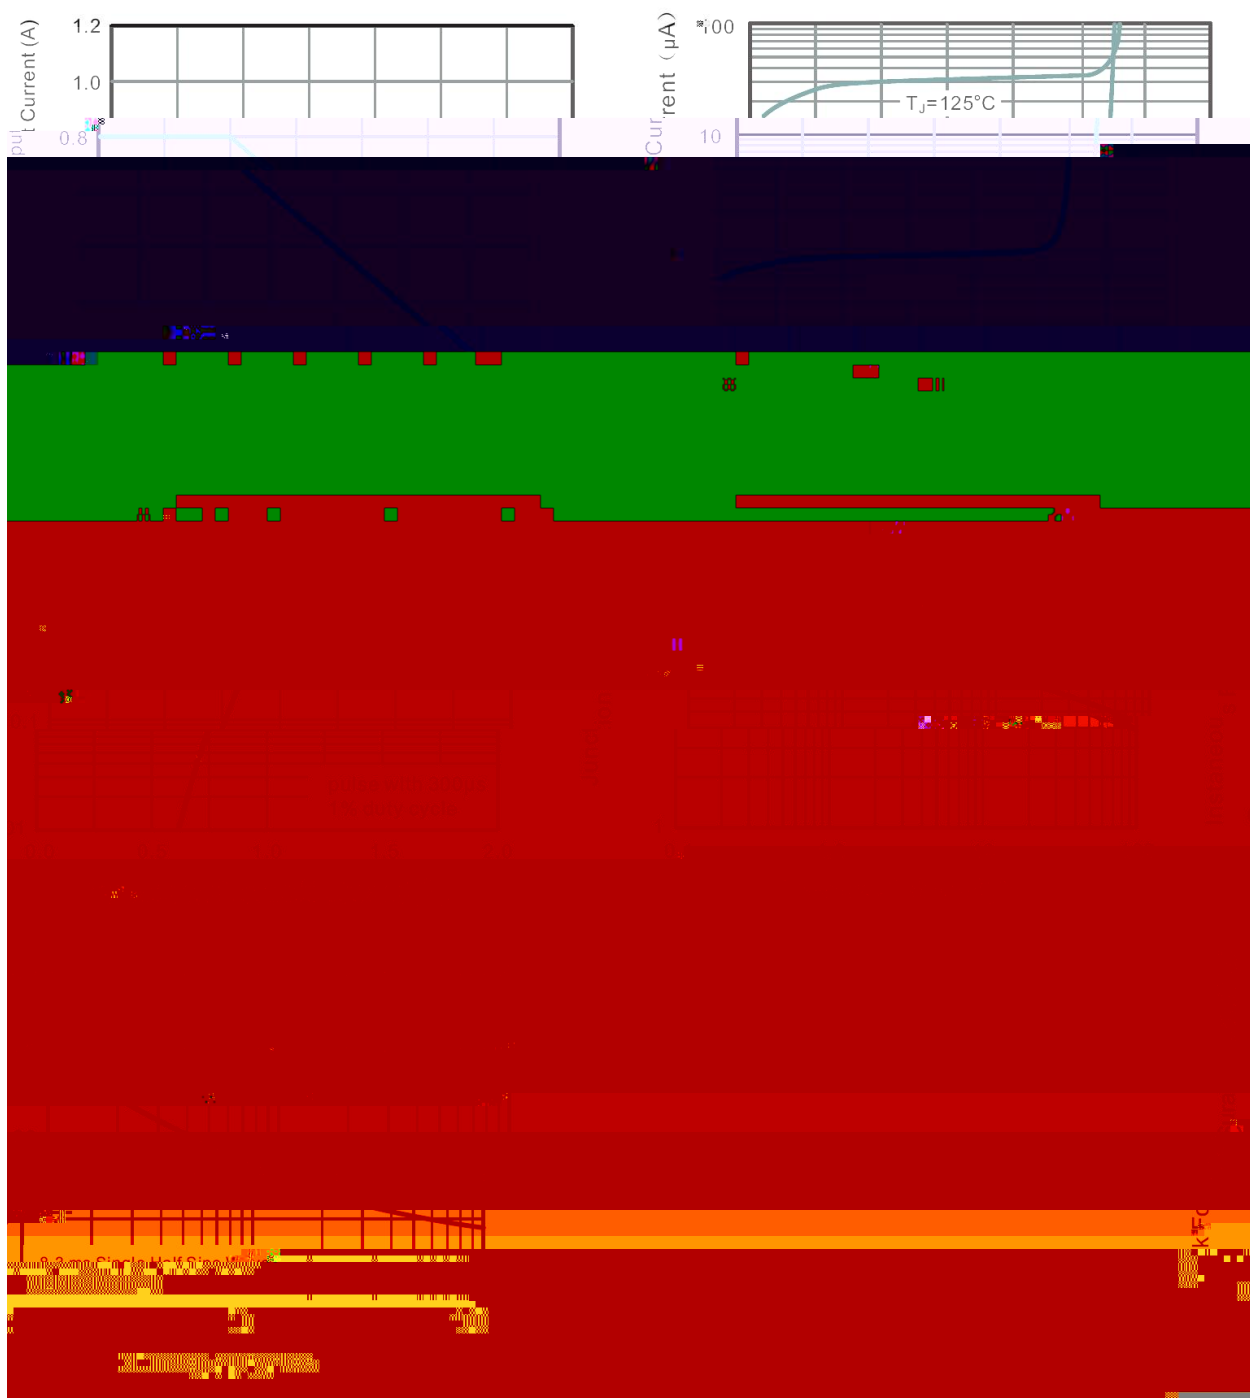

/ Marking Instructions

Marking	
Type number	Marking code
MB1M	MB1M
MB2M	MB2M
MB4M	MB4M
MB6M	MB6M
MB8M	MB8M
MB10M	MB10M

/ Marking Instructions



MB1M

1 *


3 *

Note:

MB1M Product Type Code

Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No
Code

() / Temperature Profile for Dip Soldering(Pb-Free)

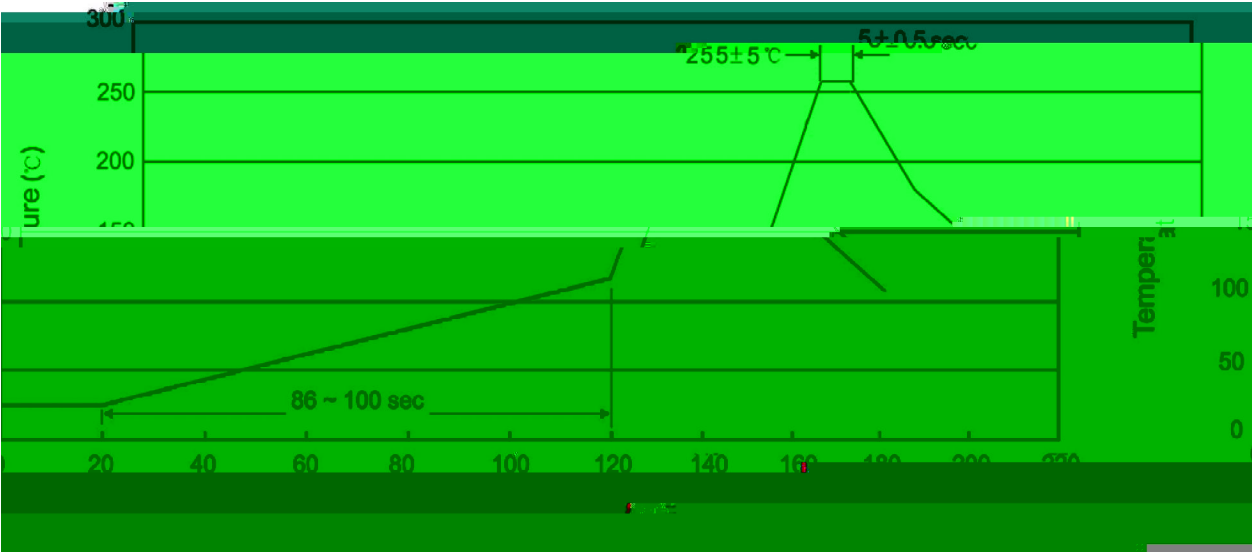

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
MBM	100	50	5000	4	20000			

/ Notices