
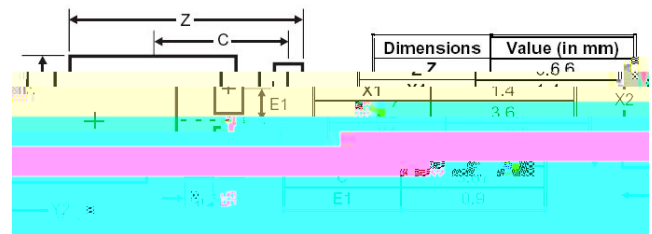


TO-277

TO-277 Plastic package Schottky diode .


High Forward Surge Capability, Low Forward Voltage Drop  $V_F(\text{typ})=0.32\text{V}$ , Excellent High Temperature Stability.




Parameter

Symbol



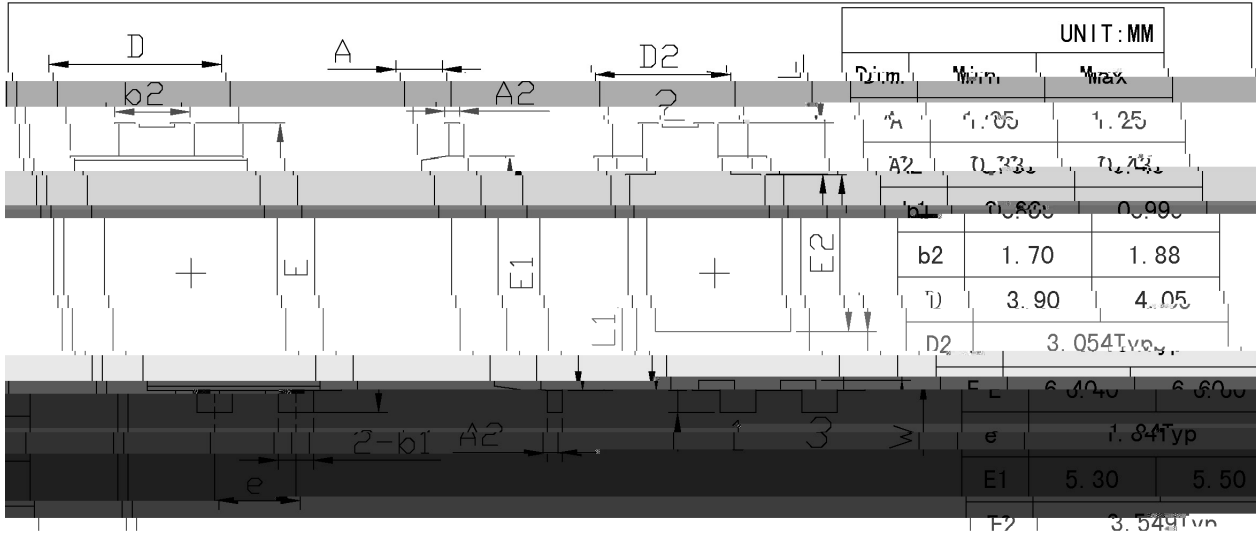

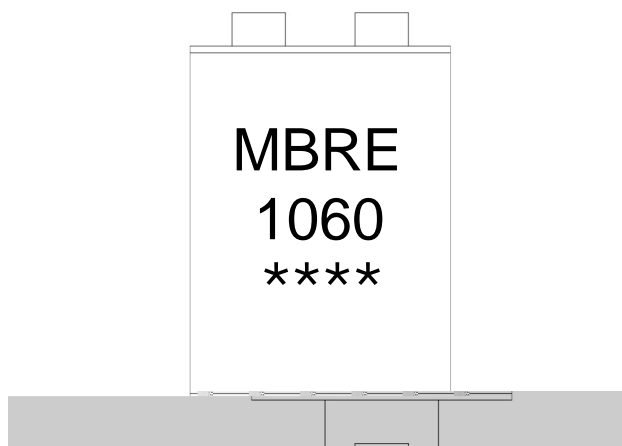


Note:

Product Type.

\*\*\*\*:

Lot No. Code, code change with Lot No.

K\d g\iXkl i\`Gif]`d`]fi`@`I`]\fn`Jfd` \i`e`^ZGY\$=i\`z

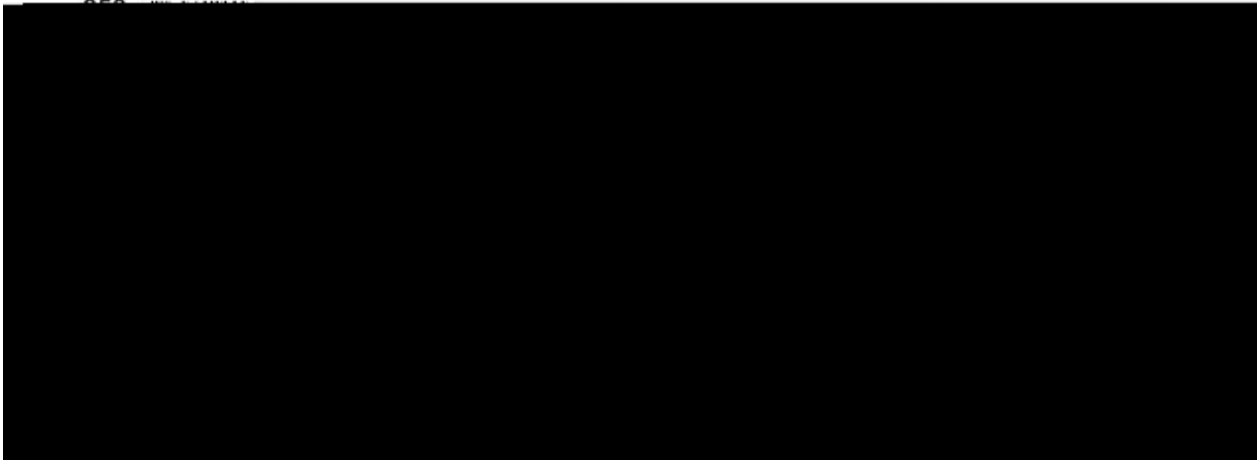

Note:

- |   |     |     |    |         |   |
|---|-----|-----|----|---------|---|
| 1 | 150 | 180 | 60 | 90sec;  | 1.Preheating:150~180 , Time:60~90sec.   |
| 2 | 245 | 5   | 5  | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 |     | 2   | 10 | /sec.   | 3. Cooling Speed: 2~10 /sec.            |

260 5                      10 1 sec.                      Temp.:260±5                      Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm <sup>3</sup> )		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-277	5,000	3	15,000	6	90,000	13 ×12	360×360×50	380×335×366