

Rev.C Dec.-2018

TO-277

Schottky Barrier Diode in a TO-277 Plastic Package.

Low forward voltage drop,low power losses,High efficiency operation. HF Product.


OR-ing      DC-DC


For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.




PIN1   Anode   PIN 2



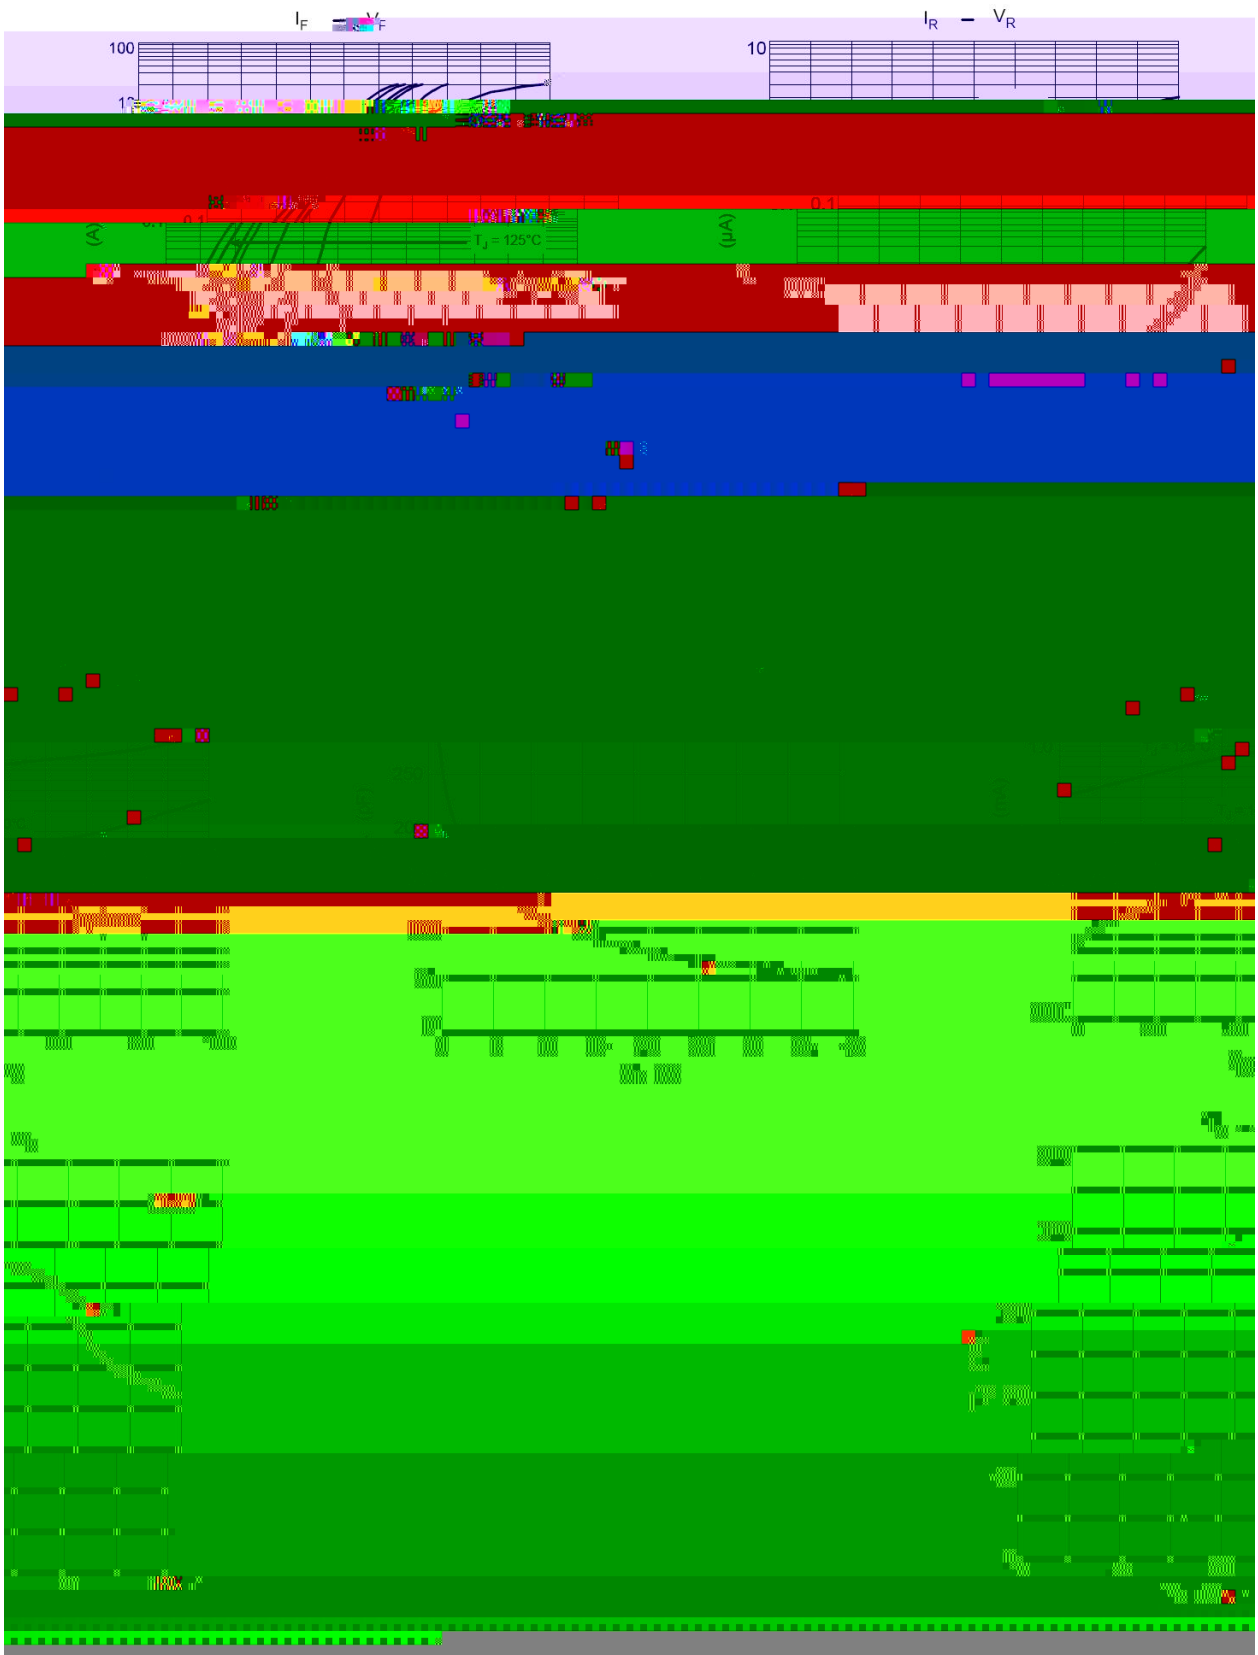

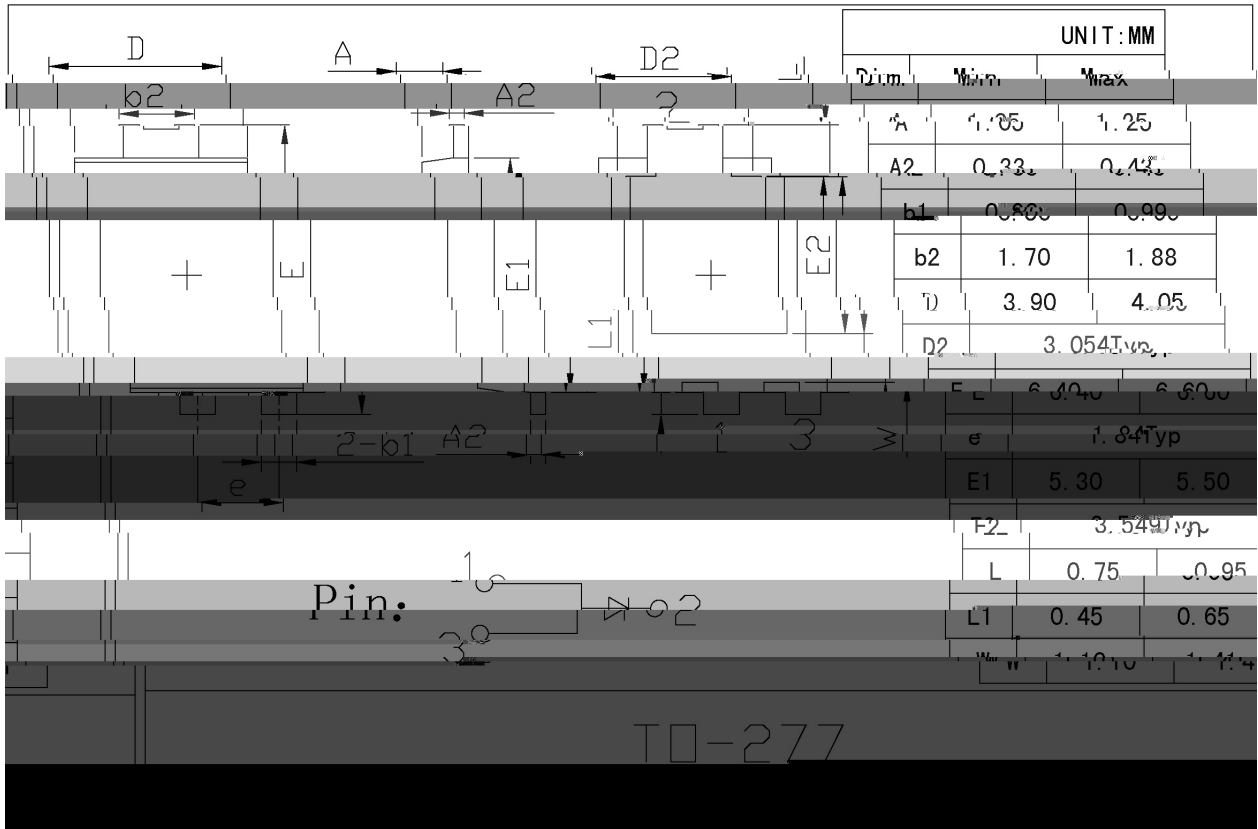

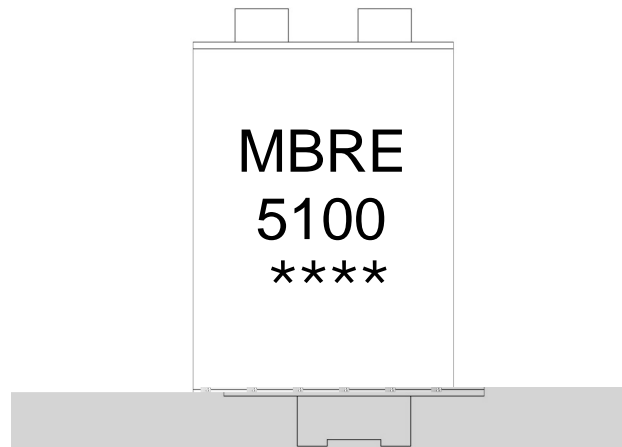

MBRE5100

\*\*\*\*

Note:


MBRE5100

\*\*\*\*:

Product Type.

Lot No. Code, code change with Lot No.

Temperature Profile for IR Reflow Soldering(Pb-Free)

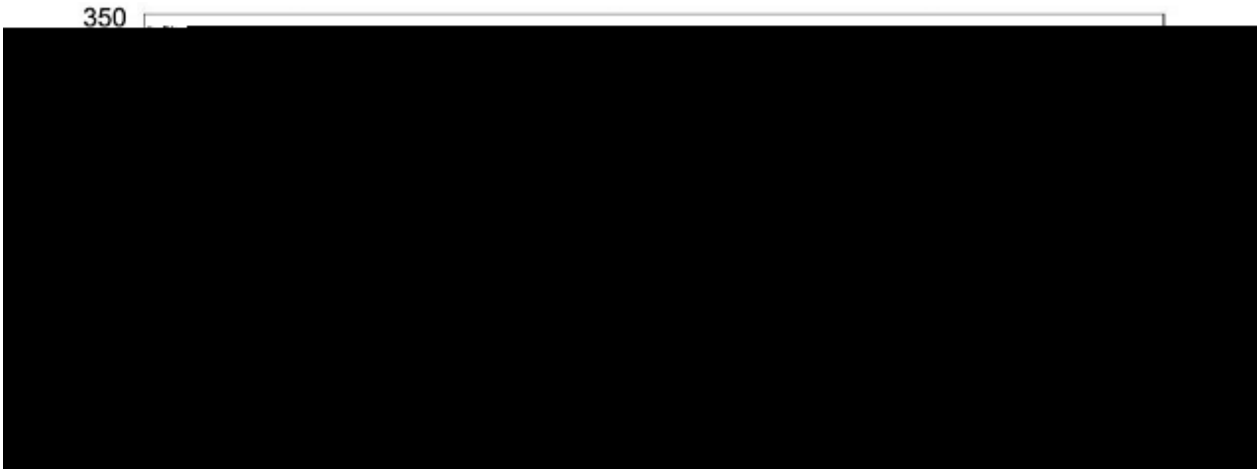

- |   |       |     |       |        |       |   |
|---|-------|-----|-------|--------|-------|---|
| 1 | 150   | 180 | 60    | 90sec; | Note: | 1.Preheating:150~180 , Time:60~90sec.   |
| 2 | 245±5 |     | 5±0.5 | sec;   |       | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 |       | 2   | 10    | /sec.  |       | 3.                                      |