
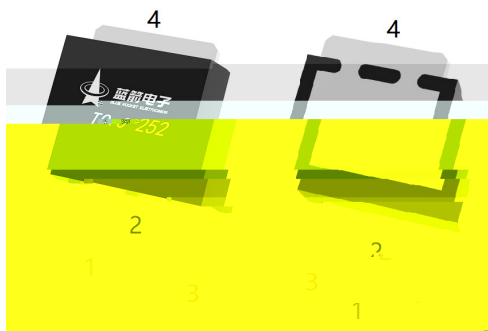


Rev.H Apr.-2023

TO-252 NPN Silicon NPN transistor in a TO-252 Plastic Package.

High collector-Emitter breakdown voltage, Suitable for transformer, HF Product.

High voltage general purpose applications.




PIN1 Base PIN 2,4 Collector PIN 3 Emitter

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}		




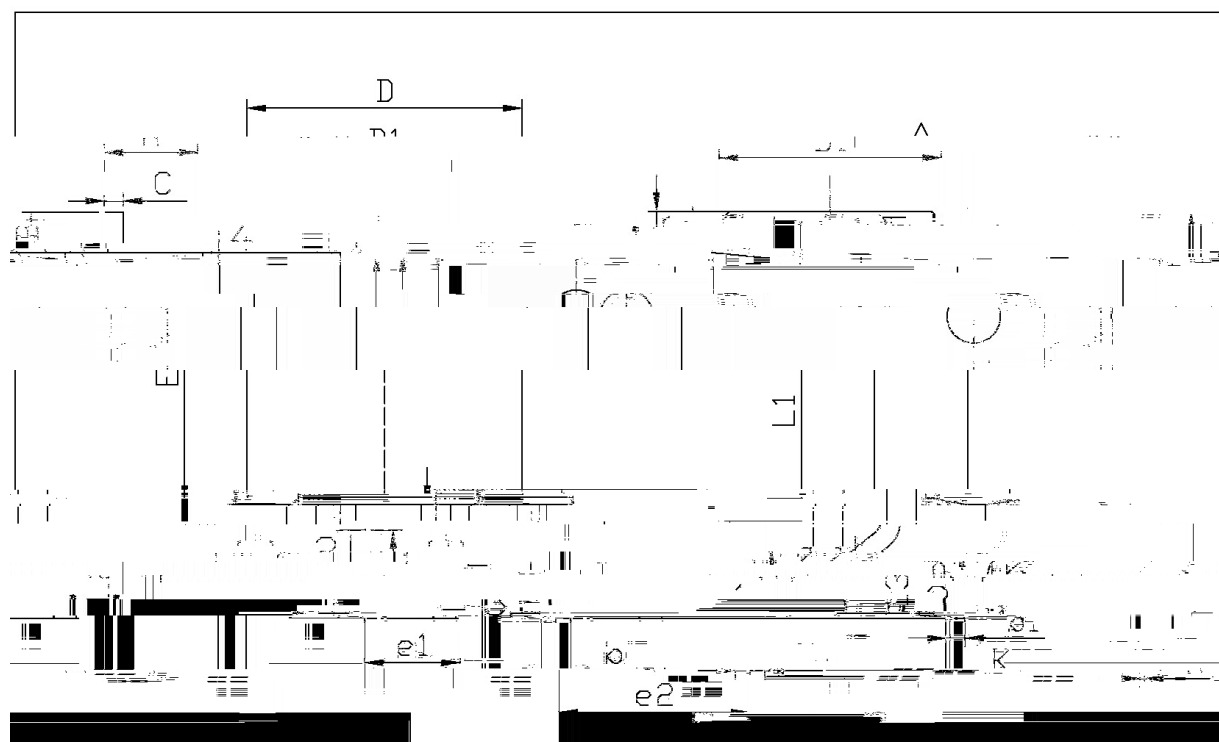

单位: mm

Max	Symbol	Min	Max	Symbol	Min
6.25	A	2.30	2.40	E	5.95
0.50	B	0.45	0.55	L1	9.45
0.45	C	0.55	0.60	L2	9.45
0.60	D	0.55	0.65	L3	9.45
0.60	E	0.55	0.65	L4	9.45
0.60	F	0.55	0.65	L5	9.45
0.60	G	0.55	0.65	L6	9.45
0.60	H	0.55	0.65	L7	9.45
0.60	I	0.55	0.65	L8	9.45
0.60	J	0.55	0.65	L9	9.45
0.60	K	0.55	0.65	L10	9.45
0.60	L	0.55	0.65	L11	9.45
0.60	M	0.55	0.65	L12	9.45
0.60	N	0.55	0.65	L13	9.45
0.60	O	0.55	0.65	L14	9.45
0.60	P	0.55	0.65	L15	9.45
0.60	Q	0.55	0.65	L16	9.45
0.60	R	0.55	0.65	L17	9.45
0.60	S	0.55	0.65	L18	9.45
0.60	T	0.55	0.65	L19	9.45
0.60	U	0.55	0.65	L20	9.45
0.60	V	0.55	0.65	L21	9.45
0.60	W	0.55	0.65	L22	9.45
0.60	X	0.55	0.65	L23	9.45
0.60	Y	0.55	0.65	L24	9.45
0.60	Z	0.55	0.65	L25	9.45

12-252

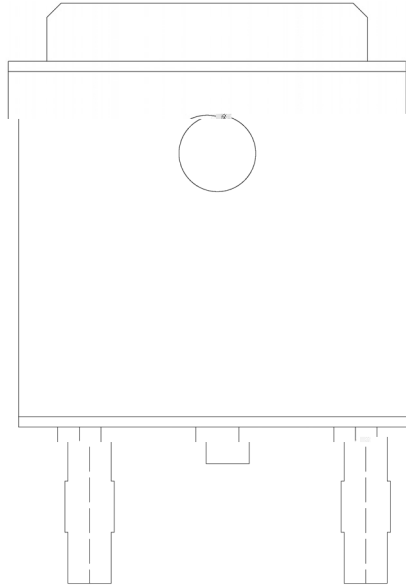

BR

C

