


/ Descriptions

SOT-323 NPN


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						μ
						μ

μ


/ Electrical Characteristic Curve



/ Package Dimensions


SOT-323

单位: mm

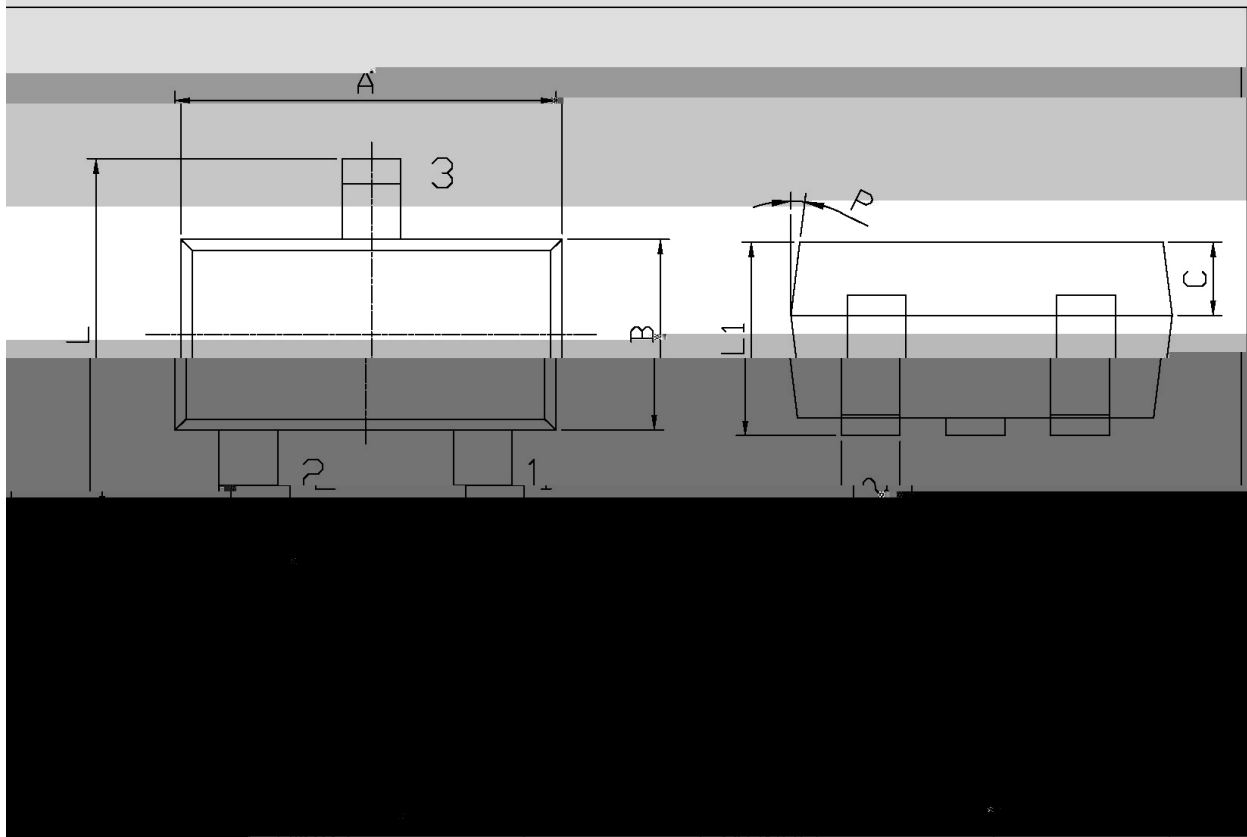

	Min	Max	Symbol	Min	Max
A	1.95	2.35	C	0.30	0.50
L	2.00	2.2	L1	0.85	1.15
E	1.20	1.40	o	0.20	0.40

/ Marking Instructions

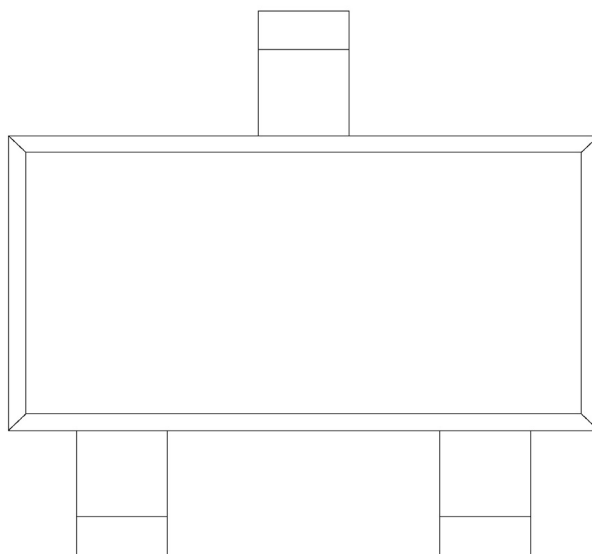

() / K\ d g\ iXk i\`Gif]`Δ`]fi`@`I`\]fn`Jfd\i`e^ŽGY\$=i\łž

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices